



McVeigh Parker

# XFENCE DEER SPECIFICATION SHEET

Deer fencing, when properly planned for, constructed and maintained, can be an effective way of controlling deer and allowing different land uses to coexist in close proximity. It also helps to protect public safety.


- Containment: use heavy gauge only
- Exclusion: use heavy or light

## Benefits


- Superior alu/zinc coated wire, lasts 3-4 longer than galvanised wire.
- Premium primary wires only used in Xfence fabricated netting
- Consistent superior high tensile strength wires only
- Greater rigidity due to the one-piece vertical wires
- Smoother and safer non-abrasive forged X knot
- Proven in the field since its conception in 2007
- Easier to install, almost self-supporting
- Save on both labour and posts
- Longer maintenance free life
- Guaranteed to last
- Made in New Zealand by the specialists in high tensile fencing
- Distributed nationally by the UK's leading fencing supplier.




Deer Farmer Matt Smith Testimonial  
[www.youtube.com/watch?v=cNm0cazHHYY](https://www.youtube.com/watch?v=cNm0cazHHYY)

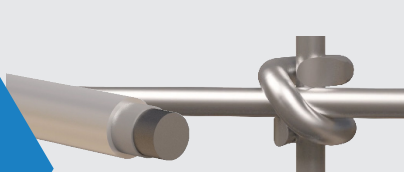


- Manufactured from highest quality primary metals
- 95% Zinc 5% Aluminium
- XTRALIFE coating 24% stronger knot
- Smooth animal friendly abrasive free design forged X knot



- Tension curves absorb any pressure from climatic change or livestock pressure. Reduce by 50% for visible tensioning
- 450mm Pre-stripped ends, speeds up tying off time



- One piece uncut vertical wire
- Acts like its own intermediate, provides real strength & rigidity to the fence, almost self supporting
- Makes installation quicker





XTRALIFE

Heavy Galv



- Xtralife coating makes the wire more ductile, easier to work
- Resists cracking when tying off, unlike some heavy galvanised wire

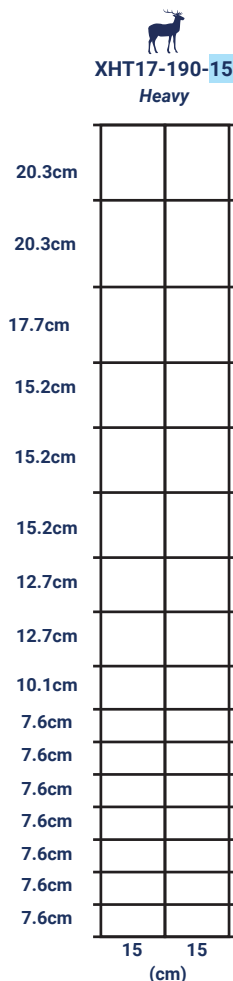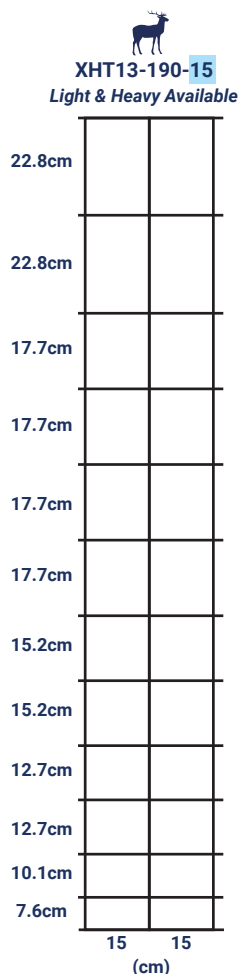Real return on your investment, not all wire is the same, why gamble?



Not compatible with Clipex but can be used with line wire system, especially useful when installing a fence line that needs to be trenched in or has a closer mesh pattern



Specification	Horizontal Wires	Vertical Spacings (cm)	Height (cm)	Roll Lengths (m)	Code
<b>Deer</b>					
<b>XHT13-190-15</b> 	13	15	190	100m	<b>F2440</b> (Heavy)
				200m	<b>F2442</b> (Heavy)
<b>XHT17-190-15</b>	17	15	190	100m	<b>F2441</b> (Heavy)
<b>XLHT13-190-15</b> 	13	15	190	50m	<b>F2441</b> (Light)



XLHT13-190-15 : Not recommended for deer containment

McVeigh Parker are able to manufacture bespoke sizes and a site visit can be arranged if required. (Min. 2000m)

