



ONDULINE® EASYLINE

ONDULINE EASYLINE® is a flexible and handy material, suitable to ensure an easy and longlasting solution for your roof.

Onduline® material does not contain any asbestos, and never had. Onduline® material does not contain any metal, it will never rust!



ONDULINE EASYLINE®

The small roofing sheets; perfectly adopted to all canopy roofs. A child's play to transport, handle and install!

EASY TO CARRY, EASY TO HANDLE, EASY TO INSTALL.



Leisure Housing



Tool Shelter




Playground



ONDULINE® EASYLINE

Choice of colors

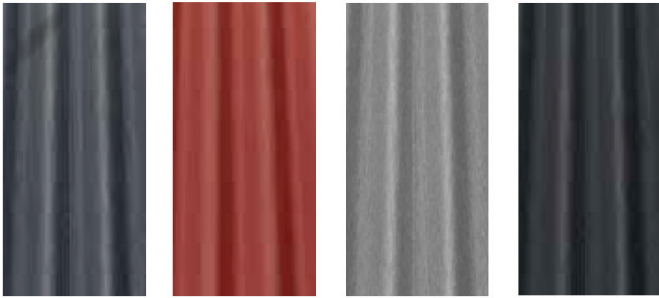

Intense Anthracite Grey


Intense Red

Intense Grey

Intense Black


Technical characteristics

Length	100 cm
Width	76 cm
Thickness	2,6 mm
Corrugation height	38 mm
Weight per sheet	2,5 kg
Surface	0,76 m ²
Carbon footprint	4 kg eq CO ₂ /m ²

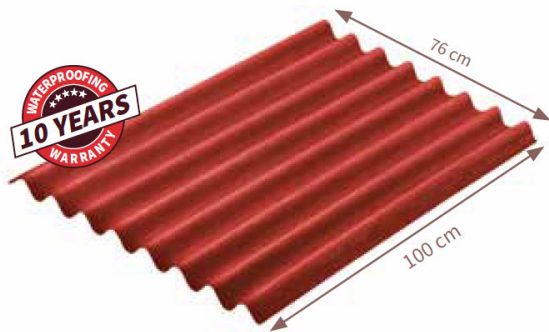



Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on onduline.com).

Installation in few and easy steps

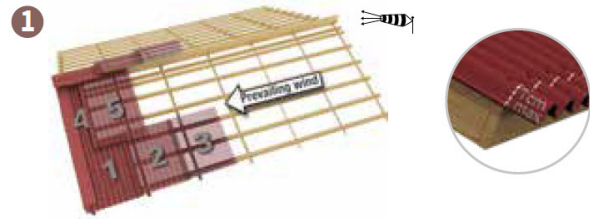

Laying in staggered rows avoids the superposition of 4 sheet thicknesses at overlap points. Always start your first row below the gutter, leaving maximum 7 cm overhang. Begin the second row with half an ONDULINE EASYLINE® sheet (cut lengthwise) and carry on with complete sheets.

- 2** Sheets must be fixed onto each of their supporting battens. Every corrugation should be nailed at eaves, overlaps and ridges. Every second corrugation has to be fixed at the intermediate purlins. The fixing at the intermediate purlins has to be staggered.

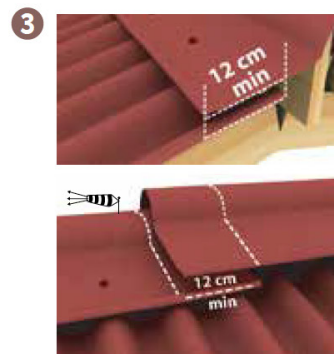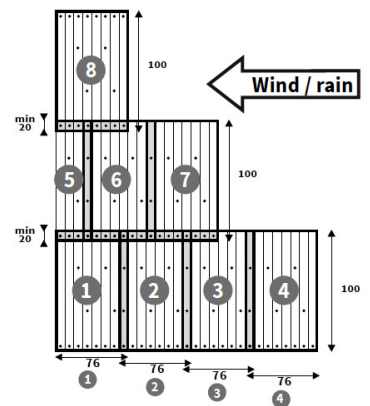

The ridge element has to overlap the ONDULINE EASYLINE® sheet min 12 cm.

The ridge elements are fixed in opposite direction to the prevailing winds.

Maintain your roof regularly for better durability: remove vegetation and leaf debris from accessories and main structure, and maintain continuous ventilation.

ONDULINE® EASYLINE

Accessories

4 Roof support


Battens rules. The roof pitch and occasional load (especially wind and snow) determine the distance between the battens. **The maximum distance is in any case 26.7 cm.**

Roof pitches

5-15°

>15°

Maximum battens distance



Boarding only (Recommended)

26,7 cm

Minimum end overlap



30 cm

20 cm

Minimum side overlap



2 corrugations

1 corrugation

Effective sheet coverage

0,47 m²

0,53 m²



ONDULINE® D100 VERGE
Dimensions: 100 x 12 x 7 cm



ONDULINE® A100 RIDGE
Dimensions: 100 x 42 cm



Circular nails
Length: 65 mm




Universal screws
Length: 60 mm

Minimum 15 fasteners/m²

CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch} = \frac{h}{b} \times 100$$



Minimum pitch required: 5°



Watch the video!

Onduline®