

LARGE WATER TROUGHS


SPECIFICATION SHEET

Large Livestock Water Trough

Large livestock water troughs are 610mm (2'0") wide x 610mm (2'0") deep.

These larger galvanised water troughs are ideal for larger livestock, dairy herds or where larger volumes of water are required such as allotments.

Please note - Service box for housing the ball valve assembly is available separately. Service box can be installed centrally or end fitted. Three wrap round brackets provide a strong fitting.

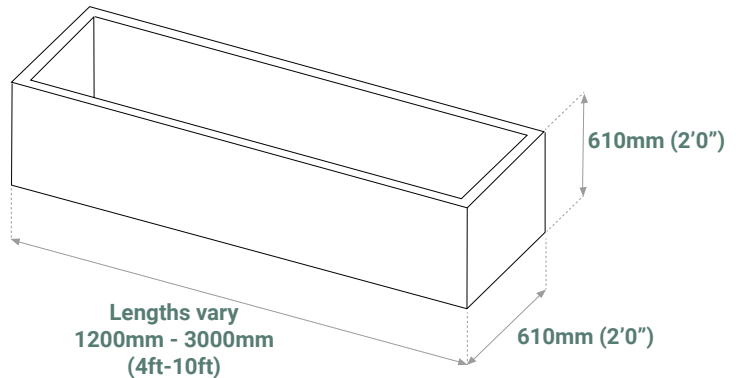

Lengths vary
1200mm - 3000mm
(4ft-10ft)

610mm (2'0")

610mm (2'0")

Drain plug

- Includes a 10mm drain plug bung as standard



Key Benefits & Features

- Manufactured in 1.6mm flat steel sheet folded, welded and then galvanised to BSEN ISO 1461
- Hot dip galvanised after manufacture for long life
- 30mm roll top trough for added strength & stability
- Strong roll top lip for added strength
- Moveable ball valve housing (service box) with three securing brackets
- Extensive range stocked from 0.5ltr to 2742ltrs
- WRAS compliant

Length	Capacity	Weight	Brace
1200mm (4ft)	454ltr (100 gallons)	47.51 kg	No horizontal cross brace
1800mm (6ft)	681ltr (150 gallons)	65.94 kg	One horizontal cross brace
2400mm (8ft)	980ltr (200 gallons)	84.38 kg	Two horizontal cross brace
3000mm (10ft)	1135ltr (250 gallons)	99.9 kg	Two horizontal cross braces



Service box

- Service box with tapered sides to prevent ball valve drop out
- Stronger design
- Suits various types of ball valves
- Supplied complete with 3 sets of mounting brackets
- Compliant with water supply regulations
- Welded service box available special order




Dairy Large Water Trough

3050mm (10'0") long x 1200mm (4'0") wide x 610mm (2'0") deep

Large livestock water drinking trough, manufactured in 2.0mm flat steel sheet folded welded then fully galvanised to BSEN ISO 1461.

This larger galvanised water trough is suited to larger livestock and dairy herds where water is required on demand.

Features a roll top for added strength & stability and drain plug comes as standard. Fully welded integral service box (ball valve housing).

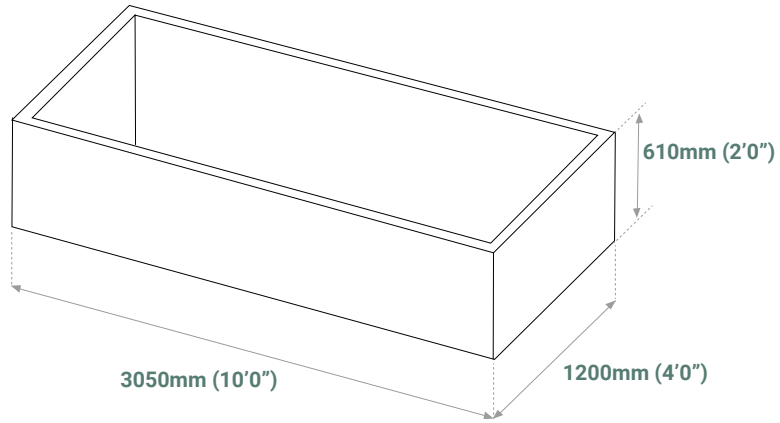

Length	Capacity	Weight	Brace
3050mm (10ft)	2270ltr (500 gallons)	194 kg	Two horizontal cross brace
3660mm (12ft)	2724ltr (600 gallons)	228 kg	Two horizontal cross brace

Service box

- Welded service box
- Stronger design
- Suits various types of ball valves
- Compliant with water supply regulations



Drain plug

- Includes a 24mm drain plug & bung as standard

