



SHEEP WATER TROUGHS

SPECIFICATION SHEET


Sheep water troughs are 457mm (1'6") wide and 267mm (10.1/2") deep.

Suitable for all livestock, our best selling water trough is manufactured from 1.6mm flat steel, sheet folded, welded and then fully galvanised to BSEN ISO 1461. It features a rolled top for added strength and stability and comes with a drain plug and bung as standard.

Please note - A service box for the ball valve assembly is available separately and not supplied with this water trough. It can be centrally or end retrofitted and is secured by three wrap round brackets.

Drain plug

- Includes a 10mm drain plug & bung as standard

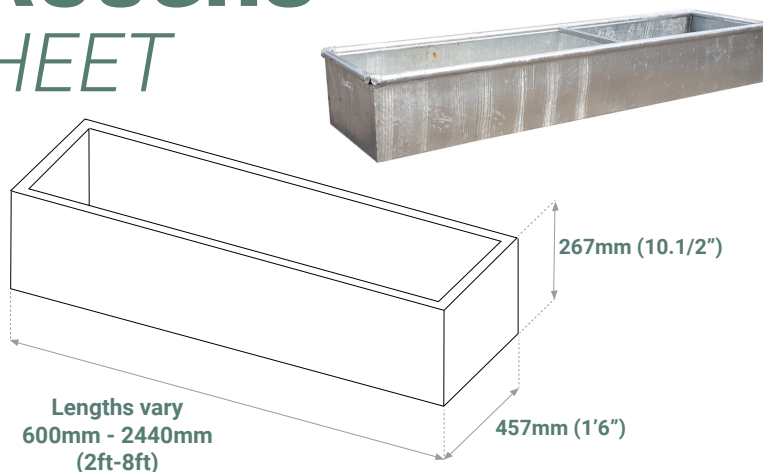

Key Benefits & Features

- Hot dip galvanised after manufacture for long life
- 30mm roll top trough for added strength & stability
- Strong roll top lip for added strength
- Moveable ball valve housing (service box) with three securing brackets
- Extensive range stocked from 0.5ltr to 2742ltrs
- WRAS compliant

Length	Capacity	Weight	Brace
610mm (2ft)	68ltr (15 gallons)	14.78kg	No horizontal cross brace
915mm (3ft)	102ltr (22.5 gallons)	19.84kg	No horizontal cross brace
1220mm (4ft)	136ltr (30 gallons)	24.94kg	No horizontal cross brace
1830mm (6ft)	204ltr (45 gallons)	35.59kg	One horizontal cross brace
2440mm (8ft)	272ltr (60 gallons)	46.23kg	Two horizontal cross braces

Service box

- Service box with tapered sides to prevent ball valve drop out
- Stronger design
- Suits various types of ball valves
- Supplied complete with 3 sets of mounting brackets
- Compliant with water supply regulations

