

HINGE JOINT DEER FENCE SPECIFICATION SHEET



A popular used deer netting, ideal for enclosures, close containment and forest protection. We would recommend using this as an external fence or boundary fence.

Manufactured from hot-dipped galvanised wire for a long maintenance free life.

Features



- Manufactured to BS EN 10223
- Wire produced to BS 4102
- XTREME reinforced coating, exceeds BSEN 10244-2 Class A lasts 3-4 times longer than commercially galvanised stock fence

LHT13-190-15 (Light)

- Wire Gauge: 2.5mm top/bottom wire, 2.0mm infills
- Horizontal wires tensile strength: 1050/1250 N/mm²
- Vertical wires tensile strength: 600/800 N/mm²

HT13-190-15

- Wire Gauge: 2.5mm throughout
- Horizontal wires tensile strength: 1050/1250 N/mm²
- Vertical wires tensile strength: 600/800 N/mm²

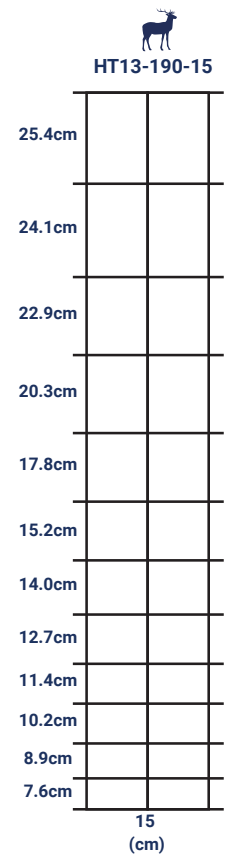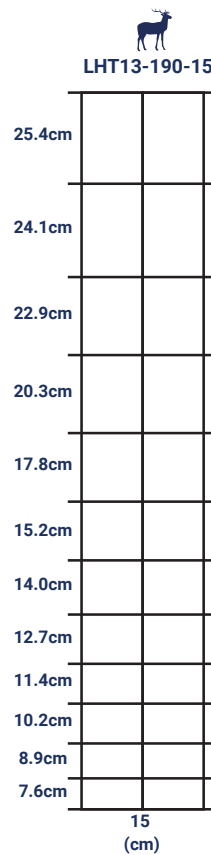

High Tensile Hinge Joint					
Specification	A	B	C	Roll Lengths	Code
		(cm)	(cm)	(m)	
LHT13-190-15 (Light)	13	15	190	50m	F2353
				100m	F2355
HT13-190-15	13	15	190	100m	F2395