

HINGE JOINT LIVESTOCK FENCE SPECIFICATION SHEET



Hinge Joint stock fencing is available in light and medium mild wire, as well as light and heavy high tensile options.

Hinge joint netting comes in various mesh sizes and patterns to suit specific applications.

All 50m and 100m rolls of McVeigh Parker hinge jointed wire netting are:

- Manufactured to BS EN 10223-5
- All wire is manufactured to BS 4102
- XTREME reinforced coating, exceeds BSEN 10244-2 Class A lasts 3-4 times longer than commercially galvanised stock fence



Benefits of mild steel hinge joint


- Cost effective- conventional, durable fencing solution
- Flexibility- hinge design and mild steel make it easier to work and install
- Suitable for permanent livestock fencing – sheep, cattle and pigs, dogs etc.
- Tension curves between the vertical wires aid climatic change, tensioning and stock pressure.
- Eco friendly-100% recyclable

Benefits of high tensile hinge joint


- Spring like properties – flexible under stock pressure, resistant to stretching
- Stronger – Fewer intermediates posts are required due to the strength of the wire
- Suitable for permanent livestock fencing – sheep, cattle and pigs, deer, Dogs etc.
- Tension curves between the vertical wires aid climatic change, tensioning and stock pressure
- Various patterns available, specialised applications such as lamb friendly netting using 22cm vertical spacings which reduce tag loss and head entrapment.
- Eco friendly-100% recyclable




Mild Tensile Hinge Joint

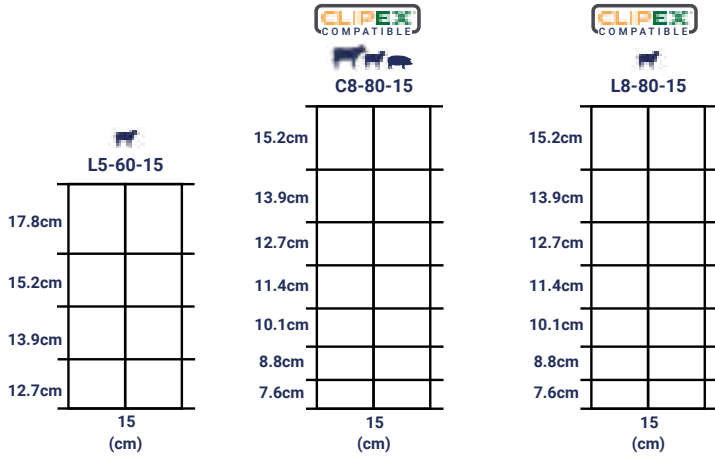

Light High Tensile Hinge Joint

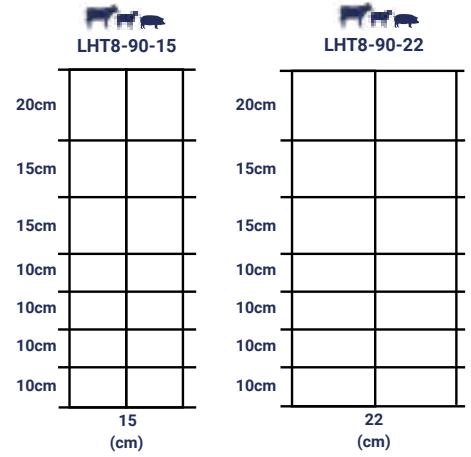

High Tensile Hinge Joint

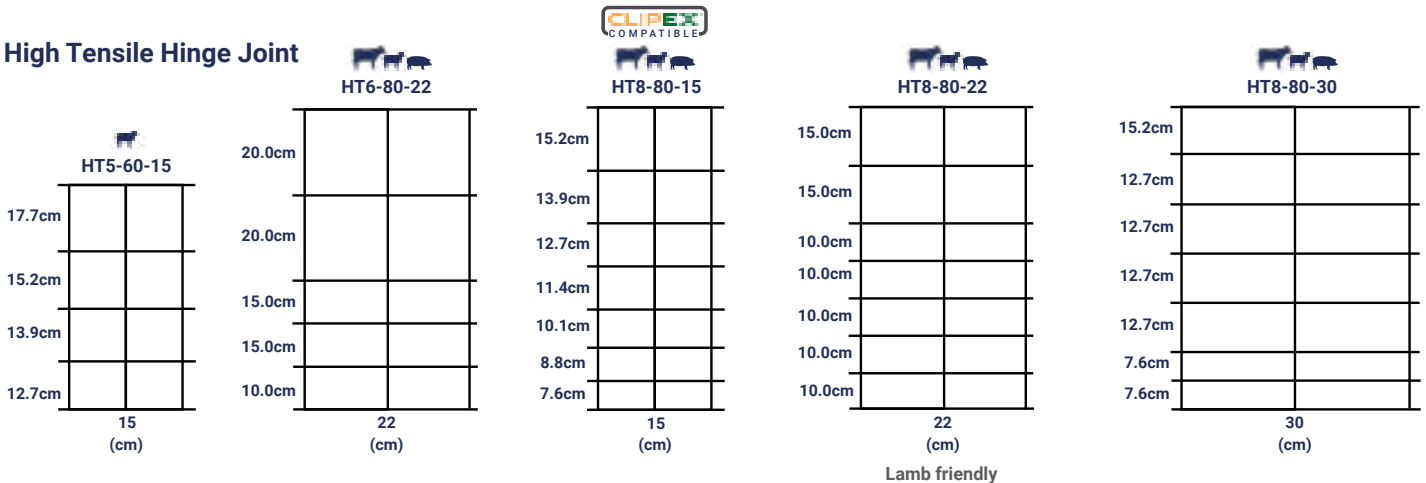

Grade	Top/bottom wires Tensile strength	Horizontal wires	Vertical Wires
C	3.0mm - 2.5mm infills	600/800 N/mm ²	352/552 N/mm ²
LHT	2.5mm - 2.0mm infills	1048/1248 N/mm ²	600/800 N/mm ²
HT	2.5mm throughout	1048/1248 N/mm ²	600/800 N/mm ²



Mild Tensile Hinge Joint					
Specification	A (cm)	B (cm)	C (cm)	Roll Lengths (m)	Code
L5-60-15 (Light)	5	15	60	50m	F2220
C8-80-15	8	15	80	50m	F2210
				300m	F2298
L8-80-15 (Light)	8	15	80	50m	F2200
				100m	F2205

High Tensile Hinge Joint					
Specification	A (cm)	B (cm)	C (cm)	Roll Lengths (m)	Code
HT5-60-15	5	15	60	100m	F2329
HT6-80-22	6	22	80	100m	F2335
HT8-80-15	8	15	80	100m	F2311
				300m	F2310
HT8-80-22	8	22	80	100m	F2318
HT8-80-30	8	30	80	100m	F2320
LHT8-90-15	8	15	90		
LHT8-90-22	8	22	90		