



# X FENCE

## SPECIFICATION SHEET

X fence fabricated fencing systems are world renowned for their durability and market leading quality. Made in Christchurch, New Zealand by leading manufacturer EuroSteel, using only the highest quality raw materials in their state-of-the-art production facility, XFence has been tried and proven in the harshest conditions and most testing applications worldwide.

- Stronger wire
- Premium coating
- Easier installation
- Longer maintenance free life




A wide variety of mesh patterns stocked to suit all livestock types.




### What separates XFence from the rest?

- XFENCE is the original X knot stiffstay product
- Only primary metal used, which means you get consistent tensile strength every time
- Every roll comes with 450mm pre-stripped ends, which make tying off easier and quicker
- Alu/zinc coated which gives 3-4 times longer life than heavy galvanised products
- The alu/zinc coating also makes the wire more ductile, easier to work with and won't crack when tying off, which can happen with some heavy galvanised products
- X fence have years of experience in producing a premium product, having this knowledge has enabled them to apply the correct pressure on the knots which reduces the wire snapping at the knots when tying off which can happen with similar products
- Guaranteed meterage
- Higher tensile strength than some cheaper heavy galvanised products helps retain tension over the life of the fence
- Non abrasive knot, prevents hide damage
- The British Standard BSEN 10244-2 coating lists a sacrificial zinc coat of 230 grm-2, X fence exceeds these standards with a Alu/Zinc alloy coating which offers an extended life protection
- X fence exceeds European Standards for strength and galvanisation and is manufactured to BSEN 10223-5

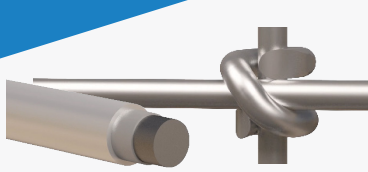


- Manufactured from highest quality primary metals
- 95% Zinc 5% Aluminium
- XTRALIFE coating 24% stronger knot
- Smooth animal friendly abrasive free design forged X knot



- Tension curves absorb any pressure from climatic change or livestock pressure. Reduce by 50% for visible tensioning
- 450mm Pre-stripped ends, speeds up tying off time



- One piece uncut vertical wire
- Acts like its own intermediate, provides real strength & rigidity to the fence, almost self supporting
- Makes installation quicker

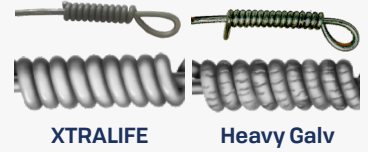

- Xtralife coating makes the wire more ductile, easier to work
- Resists cracking when tying off, unlike some heavy galvanised wire

**Full X fence range stocked**



CODE	PATTERN	TENSILE	KNOT
<b>F2412</b>	XHT 8 - 80 - 15 Stock Fence	HT	X knot
<b>F2415</b>	XHT 8 - 80 - 22 Lamb Fence	HT	X knot
<b>F2416</b>	XHT 8 - 80 - 30 Stock Fence	HT	X knot
<b>F2405</b>	XHT 11 - 122 - 15 Cattle/Railway	HT	X knot
<b>F24065</b>	XHT 11 - 122 - 7.5 Horse/Poultry	HT	X knot
<b>F2440</b>	XHT 13 - 190 - 15 Deer Fence	HT	X knot
<b>F2441</b>	XLHT 13 - 190 - 15 Deer Fence (light)	LHT	X knot
<b>F2448</b>	XLHT 13 - 190 - 7.5 Poultry/ Dogs/Deer (light)	LHT	X knot
<b>F2450</b>	XHT 13 - 190 - 7.5 Boar/Poultry/Badger	HT	X knot

CODE	PATTERN	TENSILE	KNOT
<b>F2400</b>	XHT 10 - 90 - 7.5 Horse	HT	X knot
<b>F2402</b>	XHT 12 - 110 - 7.5 Horse	HT	X knot
<b>F2404</b>	XHT 13 - 125 - 7.5 Horse	HT	X knot
<b>F2408</b>	XHT 13 - 125 - 5 Foal//Horse	LHT	X knot
<b>F2410</b>	XHT 15 - 158 - 7.5 Badger	LHT	X knot
<b>F2424</b>	XHT 6 - 80 - 22 Game Bird Fence	HT	X knot
<b>F2456</b>	XHT 19 - 180 - 5 Security/Tree Guards	HT	X knot
<b>F2454</b>	XHT 17 - 190 - 7.5 Badger/Boar/Deer	HT	X knot
<b>F2427</b>	XLHT 6 - 50 - 5 Apron fence/Otter/Poultry (light)	LHT	X knot
<b>F2462</b>	XLHT 23 - 220 - 5 Hinged Apron Otter Fence	LHT	X knot

**Wire Specification, coating and tensile strengths**

TYPE	NOMINAL - HORIZONTAL WIRES	VERTICAL WIRES	COATING
XLHT - X Knot High Tensile	2.0mm - 1235/1550 (N/mm <sup>2</sup> )	2.0mm - 850/950 (N/mm <sup>2</sup> )	Alu/Zinc
XHT - X Knot High Tensile	2.5mm - 1235/1550 (N/mm <sup>2</sup> )	2.5mm - 850/950 (N/mm <sup>2</sup> )	Alu/Zinc