




CLIPLEX STANDARD & HEAVY BEEFY POST SPECIFICATION SHEET

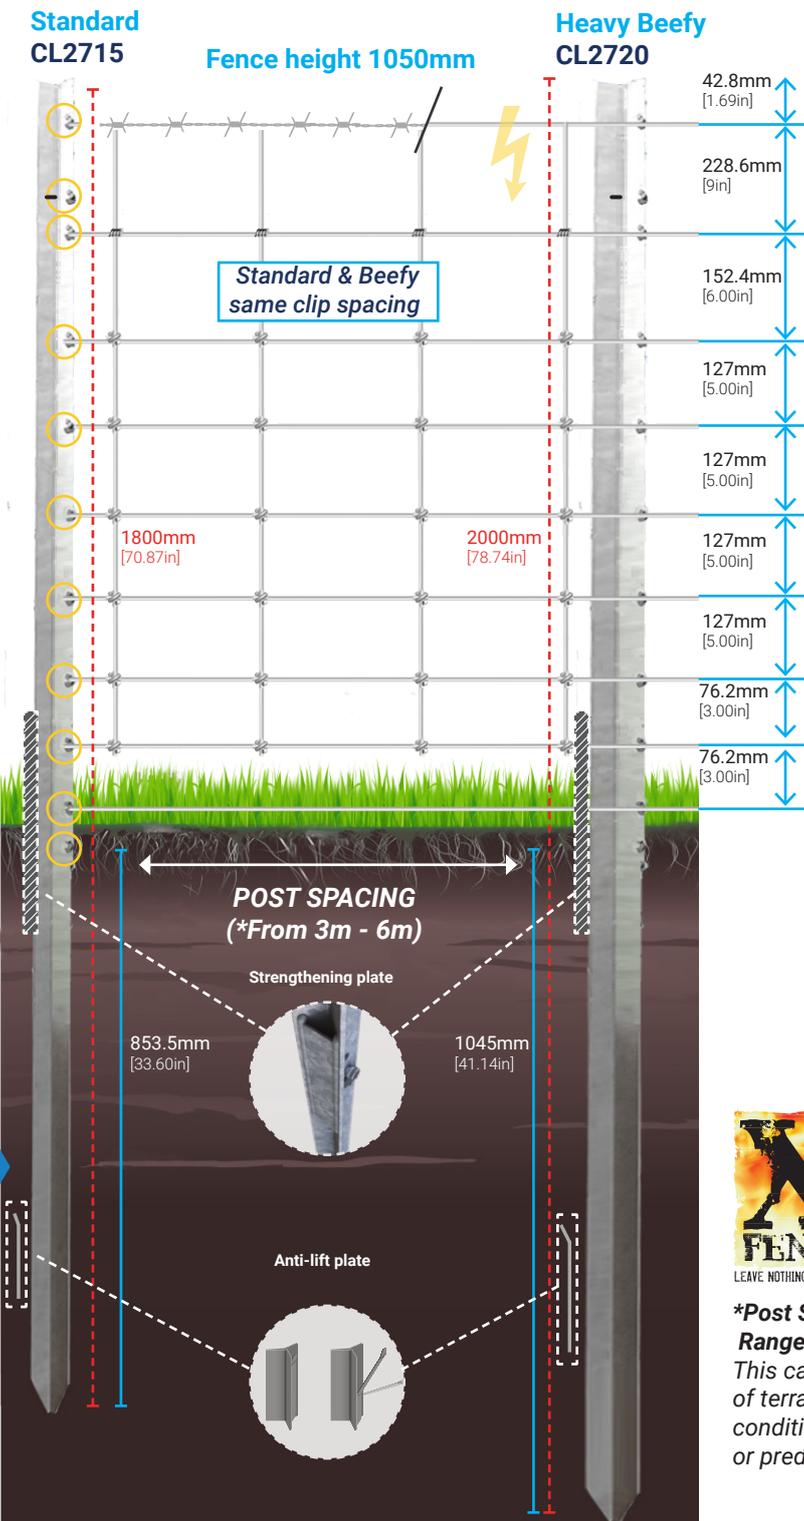


The 970mm Cattle X fence suitable for use with Cliplex.

All eight lines of the fabricated wire pattern will be clipped, with optional one row of barbed sharing the top clip with the netting. A base line of plain or barbed wire can be added if required, if not required standards and Beefys can be driven in a further 125mm (5"). We recommend using Beefys at slight changes of direction or where there are pressure points on undulating ground. We also highly recommend using all Beefys to strengthen adjoining livestock fences, especially if there are no hedgerows.


Standard - 11 Clips

- Length: 1.8m
- Weight: 3.24kg
- In ground depth: 650mm (fence height - 1.1m)
- Profile: 44mm x 35mm
- Thickness: 3.0mm

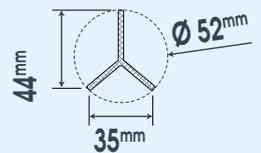

Heavy Beefy - 11 Clips

- Length: 2.0m
- Weight: 7.0kg
- In ground depth: 850mm (fence height - 1.1m)
- Thickness: 3.5mm
- Profile: 66mm x 59mm

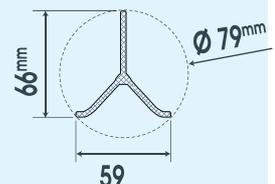

The Beefy profile has 230% more strength than the standard post with a 60% greater surface area providing far better ground adhesion.

Cliplex Insulator Post Cap Bolt on offset



Compatible wire

- X knot 8-80-15
- X knot 8-80-22
- X knot 8-80-30
- Line wire
- Barbed wire
- Electric rope/wire

***Post Spacing Range Explained:**
This can vary because of terrain, ground conditions, livestock or predator pressure.