

Silage Sheets

All our sheets are manufactured using new techniques and improved raw polymer granules. This process is known for high strength, puncture resistance and excellent seal characteristics.

The innovative combination of Visqueen Agri-S and Visqueen Clingseal - a thin, flexible, low permeability sheet helps to create the right anaerobic conditions for fast, efficient fermentation.

In doing so it prevents pockets of trapped air forming to significantly reduce aerobic spoilage on the top and shoulders.

- Reduces air pockets
- Reduces losses in the clamp
- Facilitates a more efficient fermentation
- 100% recyclable



Sizes (m)	Weight (kg)
Visqueen Agri-S Standard	
4 x 50	19.1kg
8 x 25	19.2kg
8 x 50	38.5kg
11 x 25	26.3kg
12.8 x 36	44kg
11 x 42	44.1kg
14 x 30	40.3kg
16 x 30	45.9kg
16 x 40	61kg
18.3 x 25	43.5kg
Visqueen Agri-S Double Strength	
4 x 25	19kg
8 x 28	42.8kg
11 x 28	47.1kg
Visqueen Clingseal	
8 x 50	Thickness 40 microns
12 x 50	
16 x 50	

CLINGSEAL
WHY GAMBLE?



CLINGSEAL & VISQUEEN SHEETS BETTER TOGETHER

Group Discounts

Contractor Rates

Huge Stocks + Fast Delivery



Silage Nets, Tape, & Bags

Product	Sizes (m)	Rolls (per pack)
Silage protection nets	8m x 25m	1
Tape	75mm x 33m	48
Tape	100mm x 33m	24
Patches	220 per roll	24
Silage bags	2.235m x 3.054m x 100um	10

EXPERT STAFF

03330 050115



Follow us for deals and updates

mp

McVeigh Parker

Quality Harvest Products

03330 050115

Twine / Netwrap / Stretch Wrap /
Silage Sheets / Clingseal





Stretchwrap

- Renowned for unrivalled performance
- Reliable, strong and durable with consistent quality
- High track level and long life ensures trouble-free wrapping
- Suitable for round and square bales
- Excellent protection during long winter months of storage
- Highly recommended 6 layers used



Width (mm)	Length (m)	Thickness	Rolls (per pallet)
750	1500	25um	40
500	1800	25um	48
250	1800	25um	64



SILOTITE[®] Pro




"The Contractors Choice"

- 30% more silage bales and no box
- Suitable for round baling
- Contractors tool to save you time and money

Width (mm)	Length (m)	Thickness	Rolls (per pallet)
750	1800	20um	40

Netwrap

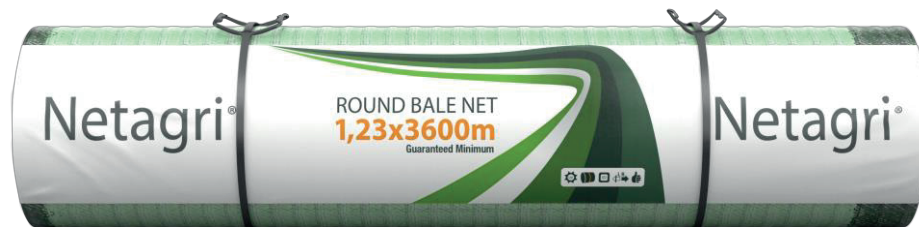

Width (mm)	Length (m)	Roll weight	Breaking strength	Pallet size
1230	3600	34.5kg	265kg - 270kg	28



BALETITE[®]



Width (mm)	Length (m)	Micron	Rolls per pallet
1280	1650	20	20
1380	2000	16	20

Crop	Bale size	No. of turns	Round bales (per roll)
Hay	1.2m Ø	2 -3	330 - 300
	1.5m Ø	2 - 2.25	250 - 225
Silage	1.2m Ø	2.25 -2.75	295 - 240
Straw	1.5m Ø	2 - 2.25	250 - 225

Twine

International Baler Twine Segmentation

EXTREME

For High Density balers where ultimate performance is required. Use it for straw in conditions of extreme density or high temperatures, short straw and corn stalks.

VERY HIGH

Specially designed for use in balers in the 'EXTRA' high density sector, or when baling in more extreme conditions - high temperatures, low humidity or making bales of extreme density.

HIGH (Equivalent to Type 130)

The best performing option for all crops and balers where high density is required. Use it for silage and for high density hay and straw bales.

STANDARD

A standard big bale twine, suitable for use in all crops and normal baling conditions.

LOW

A twine suitable for use in any big baler, where only the lowest bale density is required, which also gives maximum spool length.

Recommended Wrap Guide

LOW	STANDARD	HIGH	VERY HIGH	EXTREME
	Equivalent to Type 150	Equivalent to Type 130		Impax UHD Impax HD
Tama LSB Max	Tama LSB Long	Tama LSB Power	Tama HD Extra	Tama HD Prime
		Tama LSB Power XL	Tama HD Extra XL	Tama HD Prime XL

Call us for advice and deals on 03330 050115