McVeigh Parker
Farm and Fencing Suppliers

PRODUCT CATALOGUE

FARMING FENCING GATES & ACCESSORIES



QUALITY PRODUCTS FROM TRUSTED BRANDS

RELIABLE SERVICE NATIONWIDE

SUPPORTING UK FARMERS AND CONTRACTORS

DIGITAL EDITION

mcveighparker.com

V5 0826

Contents - *Click on chapter title for direct link to section.*

Fencing 04
Equestrian 66
Gates 78
Farming 104
Storage Tanks 134
Water & Drainage 142
Landscape & Roofing 152
Tools & Fixings 160
Information Pages 188
McVeigh Parker Branch Details 192

WHY CHOOSE MCVEIGH PARKER?

We can deliver... on product, on price and on time!

Independent UK Market Leader

Extensive Nationwide Network

Huge Stocks & Bulk Buying Power

Own Fleet of 50+ Vehicles

Specialist Trade Support

Comprehensive Product Portfolio

Established in 1979

Long Standing Reputation & Customer Loyalty

Over 120 staff. Experts in our field.

Media Links

Below, a simple guide to the media links placed throughout this catalogue:

Web link *PDF document* *Video link*

Brochure navigation: Use the chapter links at the top of each page spread.
(Colour co-ordinated per chapter)

Contact your nearest branch - see the back cover

Monday - Friday 7:30am - 5:00pm
(excluding Bank Holidays)

Enquiries available via email on
sales@mcveighparker.co.uk

Copyright of McVeigh Parker 2023©, McVeigh Parker reserve the right to change any specifications and designs without notice.
Terms and conditions - E & O. E.



WHO ARE MCVEIGH PARKER?

McVeigh Parker is a UK based, family run business supplying fencing, agricultural and landscaping products to farmers, landowners, contractors, corporates and retail customers. With more than 45 years of trading experience, we're known for delivering high quality, cost effective solutions across the country.

Our nationwide service is powered by bulk purchasing, extensive stockholding, a fleet of over 50 delivery vehicles and eight strategically located branches. This combination allows us to offer exceptional value and reliable supply wherever you are in the UK. Innovation has always been at the heart of our business. We've introduced market shaping products such as Xfence, Clipex, Triple X and Dura² timber — systems that have transformed modern fencing and land management.

We aim to be your first choice for fencing and farm supplies. Our specialist trade department understand the evolving landscape of environmental conservation and sustainable land practices. With deep sector expertise, we work closely with wildlife trusts, national parks, private estates and regenerative farming projects. Our client list includes major organisations such as Network Rail, RSPB, National Trust and leading solar energy developers.

For trade customers, we offer a dedicated sales professional and the option to open a trade account, giving you access to exclusive pricing and preferential rates on bespoke project quotations. Behind the scenes, a committed service team ensures smooth, dependable fulfilment from start to finish.

If you can't find what you need in our brochure or online — or if you have a specialist requirement — speak to us first. We pride ourselves on solving problems and delivering the most effective, best value solutions for every project.



Contemporary and traditional fencing options

At McVeigh Parker we understand that quality fencing isn't just about marking boundaries. It's about security, durability and enhancing the value of your property.

With decades of expertise serving farmers, agricultural businesses and large estate owners across the UK. We've built a reputation for knowledgeable staff providing superior materials and a customer focused service.

Our fencing stock ranges from Clipex® fencing, famous for its ease of use and its longevity, to traditional timber fencing, electric fencing, wire and stock fencing as well as security and domestic fencing and gates.



Domestic Fencing

Updating, restoring, or replacing your garden fence? Our huge stock includes natural, rustic, and contemporary fences, also panel fencing kits to make the job easier. Our stock of soft landscaping options includes sleepers, path edging, and wattle hurdles for a more natural look.



Electric Fencing

We stock only the leading manufacturers in electric fencing such as Gallagher, Strainrite, Clipex® and our huge stock holding allows for the immediate dispatch of all of our electric fencing products.

Security Fencing

When you need to keep your land, property or business location safe, you'll need security fencing. For many years chain link and welded mesh have been the go to security fencing of choice which we stock. We also stock the modern mesh panel systems in various heights.



All Steel Agricultural Fencing

Tried, tested and guaranteed to last longer, our All Steel Agricultural Fencing kits consist of "the best performing trio" X fence premium wire netting, Clipex® steel posts and Triple X Strainers. Kits are available in a variety of packages to suit your needs and budget.





Timber

Traditional wooden fencing is great for an inexpensive and aesthetically pleasing fencing solution as it is both attractive and functional. Perfect for paddock and roadside fencing, post and rail is an ideal choice for a cost-effective traditional fence.



Wire

Ideal for use in industrial, agricultural or domestic settings, wire fencing is a popular all-round fencing solution. Thanks to recent improvements in wire fencing technology, there is a much wider choice available today than there was ten or so years ago.

All Steel Agricultural Livestock Fencing

Understand the netting codes

The 30 Year Life Fence

All Steel Agricultural Fencing solution is a long-life permanent fencing system – the Clipex® quick clip steel post coupled with X fence premium stiff stay wire netting, steel strainers and a choice of either barbed, line or electric wire are simply an agricultural fencing system like no other, offering real return on investment, up to 50% lifetime cost savings are possible.

2mm Wooden Reel HT Barbed Wire
F2014

Triple X Strainer 2.4m x 75mm
CL2735

2.5mm HT Plain Wire 25kg Galv.
F2140

XHT8-80-22 X™ fence® 100m
F2415

Clipex® Heavy Beefy Post 2.0m
CL2720

Triple X Strut 2.4m
CL2740

Clipex® Standard Post 1.8m
CL2715

Triple X Pin 750x20mm
CL2755

GPAK Gripple Looped Cable 4mm
A1565






Triple X One Hole Plate
CL2758
(Larger plate option for soft ground)

CLIPEX Fencing

NEW Clipex Standard Beefy (3mm Gauge) :

Only available in 2m length, ideal for those looking to add a little strength to the fence line at a reasonable cost.

We would always recommend the Heavy Beefy, 3.5mm thick for livestock and especially for dividing paddocks.




All Steel Agricultural Lamb Friendly Stock Fence

Below, a technical drawing of a All Steel Agricultural stock fence kit showing all the components and measurements needed to complete the project.




Clipex® Beefy Posts, *When should you use Beefy posts?*
- Add a Beefy every 4th or 5th. Post to give added strength to the whole fence.
- Use ALL Beefys if a cattle dividing paddock, ideally add electric also.
- Use Beefys on turns of 15 degrees or less.
- Use Beefys in peaks and troughs on undulating ground.

- 1.1m fence height
- Clipex® Standard posts 4.5m apart
- Clipex® Beefy every 5th post
- 2 lines of barbed wire (optional)
- Wire mesh has 22cm spacing between vertical wires




X™ fence®
XHT8-80-22





High Tensile Barbed Wire
2mm, 200m



Clipex® Standard Posts
1.8m - 1.1m fence height
In-ground depth 700mm

Did You Know?
We sell a large range of Clipex posts on P12-13.






Triple X Corner/Two Way Strainer

4.5m intermediates

Triple X Diagonal End Strainer

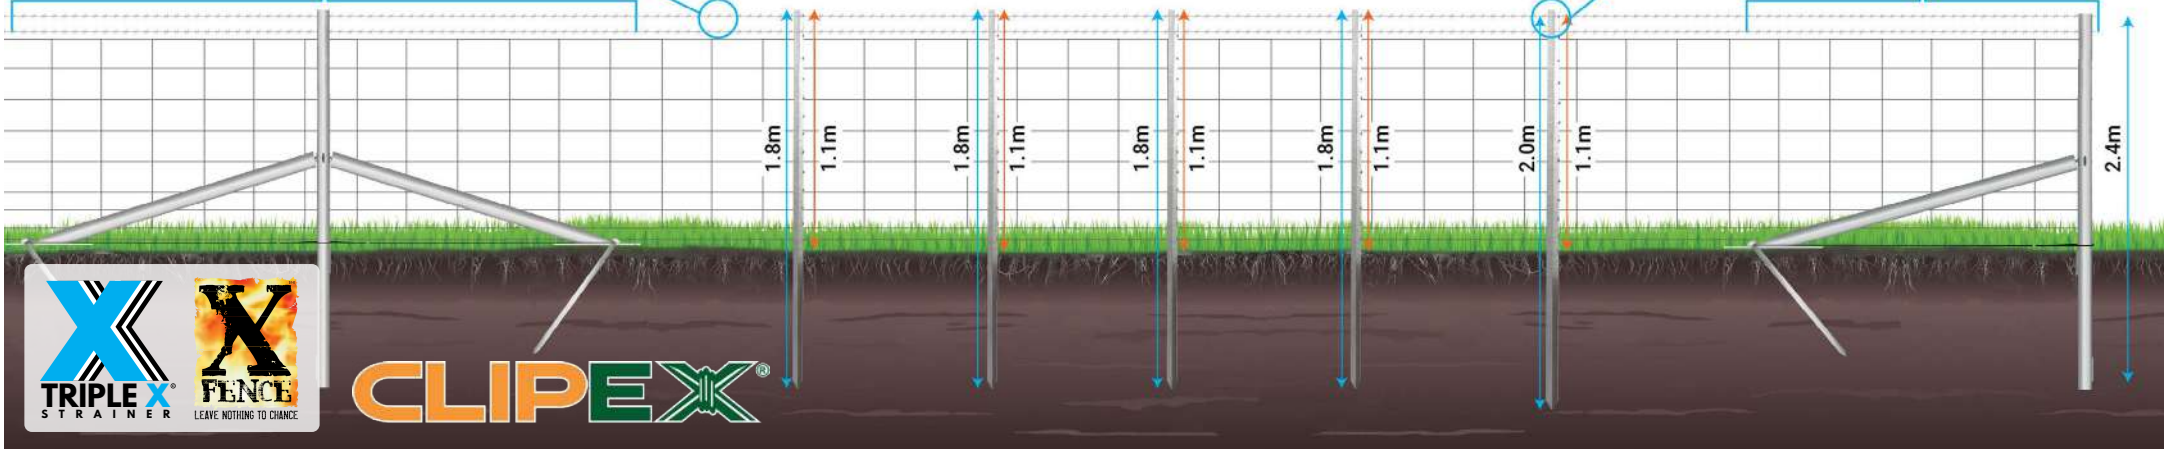

TRIPLE X STRAINER
X FENCE LEAVE NOTHING TO CHANCE
CLIPEX®

X FENCE LEAVE NOTHING TO CHANCE

Horse Netting Options

See page 23 for further details.

Deer Netting Options

See page 24 for further details.



Clipex® Beefy Posts, *When should you use Beefy posts?*

Add a Beefy every 4th or 5th post to give added strength to the whole fence.

Use ALL Beefys if a cattle dividing paddock, ideally add electric also.

Use Beefys on turns of 15 degrees or less.

Use Beefys in peaks & troughs on undulating ground.

All Steel Agricultural Deer Fence

Understand the netting codes

CLIPEX

Triple X Strut 3m
CL2750

Clipex® Deer Standard Post 3.0m
CL2725



Triple X Deer Fence Box Corner/Two Way Strainer

Triple X Strainer 3.3m
CL2745



Clipex® Beefy Post 3.0m
CL2730

High Tensile Wire 25kg Galvanised
F2140

Triple X Pin
CL2755

XHT13-190-15 Deer X™ fence®
F2440

All Steel Agricultural fencing. Various options available, contact us for a quote today.



Triple X One Hole Plate
CL2758
(Larger plate option for soft ground)

GPAK Gripple Looped Cable 4mm
A1570

Click link to view full product range

Have You Seen?

Our range of netting tools and clip options.

Check them out in the tools and fixings section of this brochure or go to **mcveighparker.com** and order the required items from there.

CLIPEX® Posts


Clipex® posts come in two profiles and five lengths to suit many applications.

1. Lateral Flexibility and Vertical Stability:
- Lateral Flex: The clips on Clipex® posts allow for side-to-side movement of the wire, which helps in maintaining the integrity of the fence when subjected to lateral forces.
- Vertical Stability: There is minimal vertical movement of the wire, which is crucial when downward pressure is applied to the fence line. This ensures the fence remains stable and secure.

2. Anti-Lift Plate:
- Pre-Fixed Anti-Lift Plate: Each Clipex® post has an anti-lift plate fixed below ground level. This plate prevents the posts from being lifted out of the ground, especially in soft or uneven terrain, ensuring the fence remains firmly anchored.

3.Versatility:
- Profiles and Lengths: Clipex® posts are available in two different profiles and five lengths, making them suitable for a wide range of applications. This versatility allows for customization based on specific fencing needs.

These features collectively enhance the durability, stability, and adaptability of fencing systems using Clipex® posts




Suggested netting for posts: ***F2424,F2412, F2415,F2416***

Clipex® Standard Post 1.8m - 3mm Gauge
CL2715




Suggested netting for posts: ***F2424,F2412, F2415,F2416***

Clipex® Standard Beefy Post 2.0m - 3mm Gauge
CL2722




Suggested netting for posts: ***F2424, F2412, F2415, F2416***

Clipex® Heavy Beefy Post 2.0m - 3.5mm Gauge
CL2720



Clipex® Pasture Post 1.5m - 2.5mm Gauge
CL2705



Clipex® Beefy Pasture Post 1.5m - 3.5mm Gauge
CL2708

Suggested netting for posts: ***Variable line wire spacing***





Clipex® Railway/ Cattle Standard Post 2.0m - 3mm Gauge
CLR2710



Suggested netting for posts: ***F2405, F24065, F2440***



Suggested netting for posts: ***F2405, F24065, F2440***



Clipex® Railway/ Cattle Beefy Post 2.1m - 3.5mm Gauge
CLR2720



Clipex® Deer Standard Post 3.0m - 3mm Gauge
CL2725



Suggested netting for posts: ***F2441, F2446, F2448, F2452***



Suggested netting for posts: ***F2441, F2446, F2448, F2452***



Clipex® Deer Beefy Post 3.0m - 3mm Gauge
CL2730




Clipex® Standard Rock Post 1.4m - 3mm Gauge
CL2716



Suggested netting for posts: ***F2424, F2412, F2415, F2416***




Clipex® Eco Post 1.8m - 2.5mm Gauge
CL2710

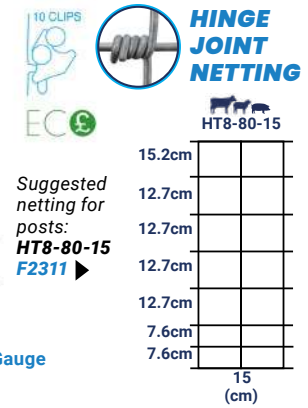

Suggested netting for posts: ***HT8-80-15 F2311***


Diagonal Strainer


Box Strainer


Corner/2 way Diagonal Strainer


Box Corner/2 way

TRIPLE X FENCING® STRAINER

Triple X All Steel Strainers

Triple X Strainers have been designed by McVeigh Parker and are proven in the field throughout the UK. Used by contractors, utility companies, farmers and landowners for stock, deer and security fencing.

Our British made strainers are a very good alternative to more traditional timber strainers, lasting much longer and saving significant installation and labour time. When teamed up with the Clipex® posts and our premium quality X Fence alu/zinc wire netting you have a fencing system that has a life expectancy of over thirty years.

Benefits of using a Triple X Strainer

- *Simple and quick installation in under five minutes*
- *Cost-effective over the lifetime of fence*
- *Guaranteed to exceed a 30 year life*
- *Diagonal or Box strainer kits available to suit all terrain and soil*
- *Only five components, easy to assemble, no fiddly parts to install or lose*
- *Exceptionally strong, fully welded top cap, the thick-walled tubular strainer can be mechanically or hydraulically driven*
- *Fully welded 6mm thick breast and thrust/directional plates*
- *Hot dip galvanised in the UK to BSEN ISO 1461*
- *Easy transportation (reduces carbon footprint)*
- *Pre-drilled holes to take multiple struts for two way and corner strainers*
- *Two lengths to choose from which suit various fence heights*
- *Corner plate available for retro-fit to create 90° angle*

Diagonal Strainer

Standard Strainer
- **Length:** 2.4m
- **Weight:** 18.5kg
- **Profile:** 75mmø x 4mm

Deer Strainer
- **Length:** 3.3m
- **Weight:** 27.5kg
- **Profile:** 75mmø x 4mm

Standard Strut
- **Length:** 2.4m
- **Weight:** 8.25kg
- **Profile:** 48.3mmø x 3mm

Deer Strut
- **Length:** 3.0m
- **Weight:** 9.01kg
- **Profile:** 48.3mmø x 3mm

End: KCPX10
Corner/2 way: KCPX20

End: KCPX30
Corner/2 way: KCPX40

Box Strainer

Standard Strainer
- **Length:** 2.4m
- **Weight:** 18.5kg
- **Profile:** 75mmø x 4mm


Deer Strainer
- **Length:** 3.3m
- **Weight:** 27.5kg
- **Profile:** 75mmø x 4mm

Standard Strut
- **Length:** 3.05m
- **Weight:** 14kg
- **Profile:** 60mmø x 3mm


Deer Strut
- **Length:** 3.05m
- **Weight:** 14kg
- **Profile:** 60mmø x 3mm

End:KCPX18
Corner/2 way: KCPX25

End: KCPX35
Corner/2 way: KCPX45

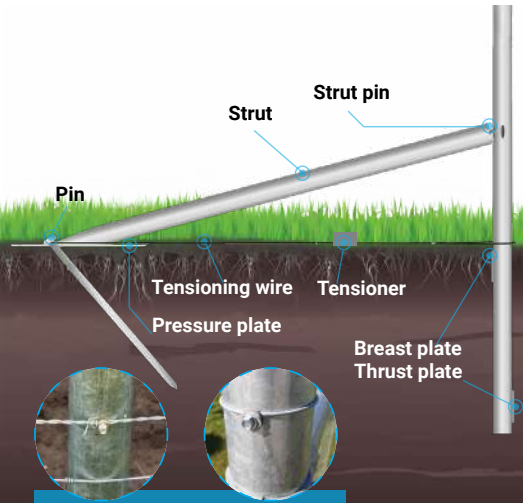

Standard self tap screw to secure barbed or plain wire

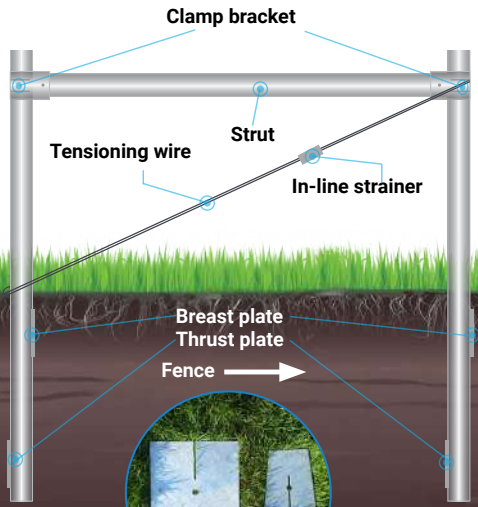


Retro-fit slotted plates
(Larger plate option for soft ground)

Clipex® Rock Strainer

Also known as an eco strainer, a lightweight, high-tensile steel post designed for fast installation without heavy machinery.

- *Guaranteed for 30 years (should exceed this subject to location)*
- *Exceptionally strong, thick walled tubular strainer can be mechanically or hydraulically driven in*
- *Easy to transport to site (reduces carbon footprint of some projects)*

A super strong strainer with a 30 year life guarantee for those extreme fencing projects.

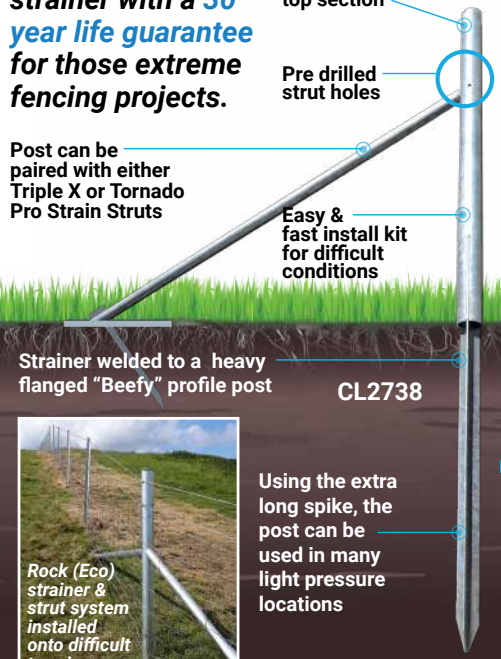


Rock (Eco) strainer & strut system installed onto difficult terrain

Using the extra long spike, the post can be used in many light pressure locations

Eco Beefy Strainer

The Eco Beefy strainer is a cost effective, simple strainer. Ideally suited for electric fence, reinforcing slight angles or a semi-temporary fencing end strainer.



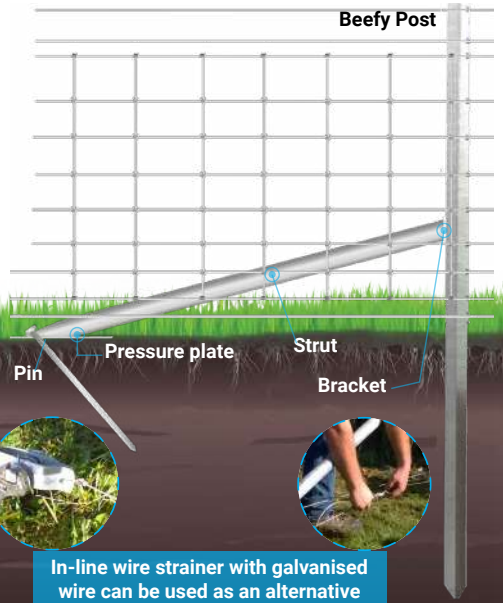

In-line wire strainer with galvanised wire can be used as an alternative to the gripple and tension wire, no specialist tool required.

TORNADO® The Rural Fencing Range

We are proud to offer the Rural Fencing Range, featuring the innovative i post and Pro strain strainer — each delivering unique advantages for agricultural, estate and land management projects.



*The **NEW** Pro-Strain i Post*

Steel Strength. Timber Flexibility.
The sustainable fencing post engineered for rural performance.

Manufactured Using Recycled UK Farm Plastics
Featuring a 100% recycled plastic insert produced from UK agricultural waste, helping transform end-of-life farm plastics into durable, long-lasting fencing materials.

Available in Multiple Lengths
Supplied in 1.8m, 2.1m and 3.0m lengths to suit a wide range of agricultural, environmental and rural fencing projects.

Engineered for Difficult Ground Conditions
Constructed from high-strength structural galvanised steel and fitted with a pointed drive-in tip, delivering exceptional performance in compacted, stony and rocky ground where traditional timber posts can struggle.

Maximum Mesh Attachment Flexibility
With no pre-determined clip spacing, staples can be installed exactly where required. This makes the post suitable for a wide variety of fabricated mesh, welded mesh and chain link patterns, particularly fine mesh specifications with multiple horizontal line wires.

The Flexibility of Timber with the Strength of Steel
Simply staple directly into the recycled plastic insert at any point along the post, providing the installation flexibility of timber combined with the strength and longevity of galvanised steel.

Built for Farmers, Contractors and Landowners
A practical, time-saving fencing solution that reduces installation complexity whilst delivering outstanding durability and long-term performance.

Key Benefits

- Suitable for multi wire fabricated mesh patterns, welded mesh and chain link fencing systems
- Ideal for otter, badger, wildlife and security fencing schemes
- Flexible staple positioning with no fixed clip locations
- Faster installation with fewer components
- Excellent performance in rocky, stony and compacted ground
- Recycled plastic insert manufactured from UK agricultural waste
- High-strength galvanised steel construction for extended service life
- Combines the installation ease of timber with the longevity of steel



Animal	Livestock	Horse/Rail	Poultry	Deer
Post Height	Pro-Strain i-Post 1.8m	Pro-Strain i-Post 2.1m	Pro-Strain i-Post 2.4m	Pro-Strain i-Post 3.0m
Code	CL6710	CL6715	CL6720	CL6725



*The **NEW** Pro Strain Strainer*

Smarter tensioning. Stronger foundations. More installation control.

- The innovative Pro-Strain strainer is a fence strainer offering key benefits over alternative systems such as Triple X strainers. The key feature is the adjustable Acrow prop style adjustable strut mechanism, this allows the installer to pre-load the tension minimising movement before the wire is installed.

- Combine With Welded Systems. Maximise Strength.
  Prefer a fully welded strainer but want the benefits of the Pro Strain adjustable strut? Simply pair the Triple X welded strainer with the Pro Strain strut assembly to create a hybrid solution that delivers the best of both systems.

Pro-Strain Strainer Kits

Livestock/Horse Diagonal Strainer (CL6711)	
Item	**Qty.**
2.4m x 89mm x 3.0mm CHS	1
1.0m x strut peg	1
Adjuster	1
Connectors - 1 large, 1 small	2

Livestock/Horse Box Strainer (CL6721)	
Item	**Qty.**
2.6m x 89mm x 3.0mm CHS	1
Adjuster	1
Connectors - 1 large, 1 small	2

Deer Diagonal Strainer (CL6730)	
Item	**Qty.**
3.2m x 89mm x 3.0mm CHS	1
1.0m x strut peg	1
Adjuster	1
Connectors - 1 large, 1 small	2

Pro-Strain Strut Kits *(One kit per end, 2 kits per corner / 2 way)*

Livestock/Horse Diagonal Strainer (CL6740)	
Item	**Qty.**
2.4m x 48mm x 3.2mm CHS	1
1.0m x strut peg	1
Adjuster	1
Connectors - 1 large, 1 small	2

Livestock/Horse Box Strainer (CL6745)	
Item	**Qty.**
2.4m x 48mm x 3.2mm CHS	1
Adjuster	1
Connectors - 1 large, 1 small	2

Deer Diagonal Strainer (CL6750)	
Item	**Qty.**
3.0m x 48mm x 3.2mm CHS	1
1.0m x strut peg	1
Adjuster	1
Connectors - 1 large, 1 small	2

Deer Box Strainer (CL6752)	
Item	**Qty.**
3.0m x 48mm x 3.2mm CHS	1
Adjuster	1
Connectors - 1 large, 1 small	2

Wire Fencing


A wide choice of stock netting, hexagonal wire netting, line wire and barbed wire, in different tensile strengths. For use in industrial, agricultural or domestic settings. We have a huge stock with over 50,000 rolls of fencing available. We can also design bespoke fencing.

Understanding The Netting Codes

	A	B	C
XHT -	8	- 80	- 15
Type	Horizontal wires	Fence Height (cm)	Vertical Spacings (cm)

Tensile Strength

The strength of the wire, measured in N/mm² (Newton per square millimeter) in both horizontal and vertical axis.

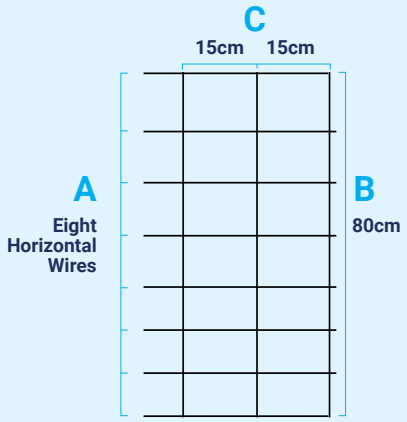

Tensile Strength: 1235 - 1550N/mm²

Gauge: 2.5mm alu / zinc

What do the product descriptions mean?

Fabricated netting codes. XHT8-80-15
X = X Knot
L = Light weight mild steel, hinge joint
C = Medium weight, mild steel, hinge joint
B = Heavy gauge, mild steel, hinge joint
(very rarely used now)

LHT = Light high tensile
HT = Heavy high tensile

XLHT = Light high tensile, X knot joint
XHT = Heavy high tensile, X knot joint

8 = The amount of horizontal line wires
80 = Height in centimetres
15 = Distance between the vertical wires

Coating options to BSEN 10244-2

Xtralife alu/zinc coating.
Lasts 2-3 times longer than galvanised coating.
Highly recommended, exceeds British Standards.

Wire Joint Options



Hinged joint
Traditional economical knot found in many types of fabricated net. Each vertical stay wire is separately wrapped at every horizontal line wire.



X Knot
Proven to be one of the strongest knots in high tensile fabricated netting. The one piece vertical wires are held in place by a smooth surfaced forged X knot, creating an extremely strong almost self -supporting net

Tensile Strengths

	Horizontal Wires	Vertical Wires
L Mild =	600 - 800 mpa	400 - 600 mpa
C Mild =	600 - 800 mpa	400 - 600 mpa
LHT =	1100 - 1250 mpa	600 - 750 mpa
HT =	1048 - 1248 mpa	600 - 800 mpa
XLHT =	1235 - 1550 mpa	850 - 950 mpa
XHT =	1235 - 1550 mpa	850 - 950 mpa

Contemplating the cost of your next fencing project?

Invest Once. Benefit for Decades.

Don't ask:
"What does your fence cost today?"

Ask:
"What will it cost per metre per year over the life of the fence?"





That's where premium fencing wins.

Premium fencing systems such as our all steel X fence premium wire, Clipex all steel posts and all metal Triple X strainers may require a higher initial investment, but they deliver significant savings, compare below Vs standard fencing:

Premium All Steel Fencing	Vs	*Standard Hinge Jointed Fencing*
✓ Longer service life		✓ Lower upfront cost
✓ Faster installation		✗ Higher lifetime cost
✓ Reduced labour costs		✗ Repeat renewal & inflationary costs
✓ Fewer intermediate costs		✗ Repeat Labour & disposal costs
✓ Lower maintenance requirements		
✓ Stronger & more reliable fence lines		
✓ Lower carbon footprint over lifetime of fence		
✓ Quicker project completition, huge savings on larger projects and emergency repairs		
✓ Initial higher upfront cost offset with better returns per metre over the lifetime of the fence		

Below: Damaged hinge joint fencing in need of repair.. AGAIN!



THE COMMERCIAL CHOICE - Fence for 30 years, minimum...



X™ FENCE® 'THE ORIGINAL'

X fence fabricated fencing systems are world renowned for their durability and market leading quality. Using only the highest quality raw materials in their state-of-the-art production facility, X fence has been tried and proven in the harshest conditions and most testing applications worldwide.

- Stronger wire
- Premium coating
- Easier installation
- Longer maintenance free life



X Knot Joint



A wide variety of mesh patterns stocked to suit all livestock types.






What separates X™ fence® from the rest?

- X fence is the original X knot stiffstay product
- Only primary metal used, which means you get consistent tensile strength every time
- Every roll comes with 450mm pre-stripped ends, which make tying off easier and quicker
- Alu/zinc coated which gives 3-4 times longer life than standard galvanised products
- The alu/zinc coating also makes the wire more ductile, easier to work with and won't crack when tying off, which can happen with some heavy galvanised products
- X fence have years of experience in producing a premium product, having this knowledge has enabled them to apply the correct pressure on the knots which reduces the wire snapping at the knots when tying off which can happen with similar products
- Guaranteed meterage
- Higher tensile strength than some cheaper heavy galvanised products helps retain tension over the life of the fence
- Non abrasive knot, prevents hide damage
- The British Standard BSEN 10244-2 coating lists a sacrificial zinc coat of 230 grm-2, X fence exceeds these standards with a Alu/Zinc alloy coating which offers an extended life protection
- X fence exceeds European Standards for strength and galvanisation and is manufactured to BSEN 10223-5



- Manufactured from highest quality primary metals
- 95% zinc 5% aluminium
- XTRALIFE coating
- 24% stronger knot
- Smooth animal friendly abrasive free design forged X knot



- Tension curves absorb any pressure from climatic change or livestock pressure. Reduce by 50% for visible tensioning
- 450mm Pre-stripped ends, speeds up tying off time



- One piece uncut vertical wire
- Acts like its own intermediate, provides real strength & rigidity to the fence, almost self supporting
- Makes installation quicker



- XTRALIFE coating makes the wire more ductile, easier to work
- Resists cracking when tying off, unlike some heavy galvanised wire

The X™ fence® Wire Manufacturing Process

X Fence is different from the rest. Premium, world-leading, giving you the best return on your investment.

It starts with the raw material – the finest high-grade 100% iron ore, free of impurities – which is then taken to world-leading processing plant to be turned into the premium steel wire used to make X Fence.

Standard galvanising processes use zinc-only coatings for the wire. X Fence is treated with a zinc/aluminium coating.

Zinc-only coatings don't provide the same levels of protection, making the steel less ductile and thus more prone to cracking when tying off. In addition to the Zinc/Aluminium coating, X Fence's special process differs from other manufacturers as it ensures an even spread, whereas many others can leave an uneven finish which allows for patchy wear and rust. As a result X Fence can give up to three times the lifespan of traditionally galvanised wire.

Batching the coiled wire also guarantees traceability and a consistent quality throughout the manufacturing process, ensuring the tensile strength variation is kept to a minimum, and providing an even tension right across the fabricated net.



Iron ore



Pouring and drawing







Billet to coil, coating to fabrication



Testing, rolls, to erection to final use

> "The wire is only as good as the raw material it's made from"

Livestock Fencing




An unobtrusive smooth surface X knot greatly reduces the risk of fleece removal or hide damage, this is a very popular mesh pattern used widely in the UK and is ideal for most types of livestock. Manufactured to BS EN 10223-5, exceeds BS EN 10244 Class A, wire produced to BS 4102.

THE ORIGINAL X FENCE

X FENCE LEAVE NOTHING TO CHANCE



LAMB FRIENDLY

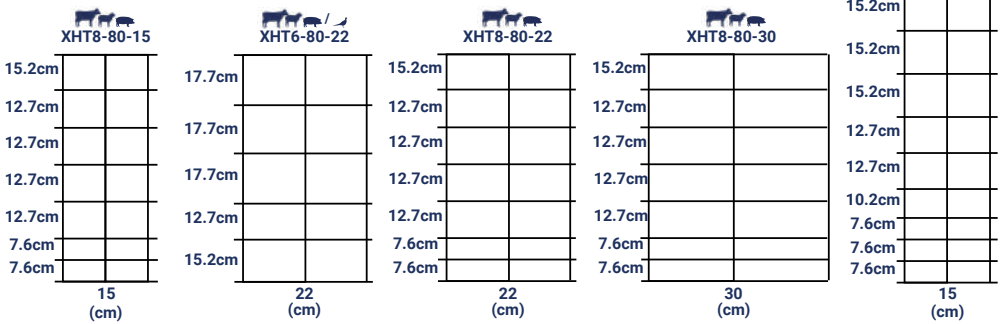


X™ fence®					
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Code
XHT6-80-22 CLIPEX COMPATIBLE	6	80	22	100m	F2424
				300m	F2425
XHT8-80-15 CLIPEX COMPATIBLE	8	80	15	100m	F2412
				300m	F2414
XHT8-80-22 CLIPEX COMPATIBLE	8	80	22	100m	F2415
				300m	F2419
				500m	F2422
XHT8-80-30 CLIPEX COMPATIBLE	8	80	30	100m	F2416
				300m	F2418
				500m	F2417
XHT11-122-15 CLIPEX COMPATIBLE	11	122	15	100m	F2405

Our Advice

Looking for a sheep fence?

We recommend **XHT8-80-22**, this lamb friendly option has wider spacing between the vertical wires, this helps prevent lambs and sheep head entrapment also reduces tag loss.




BS172-2 2020 now recognises this netting on welfare grounds.



Horse Fencing


Understand the netting codes

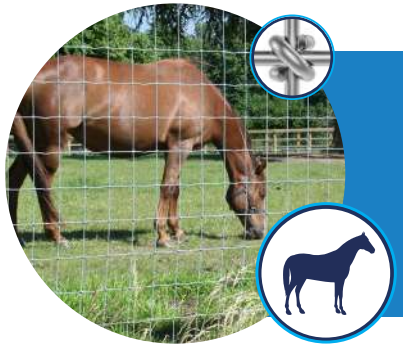

The strong unobtrusive X knot not only provides an excellent joint, but it's smooth surface also provides a safe environment for horses. The alu/zinc coating will last 3-4 times longer than galvanised wire. Five sizes to choose from, all with smaller mesh sizes, reducing the risk of injury or hoof entrapment.

THE ORIGINAL X FENCE

X FENCE LEAVE NOTHING TO CHANCE

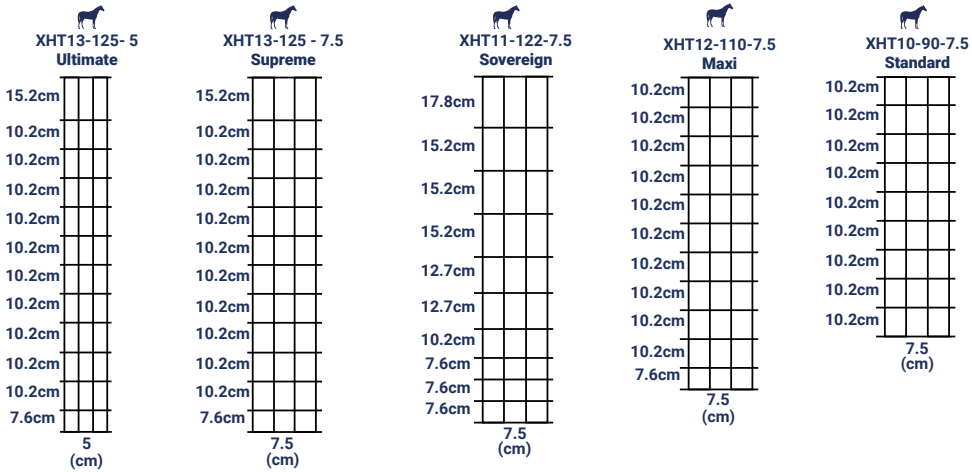

X™ fence®					
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Code
XHT10-90-7.5 Standard	10	90	7.5	50m	F2400
				100m	F2401
XHT12-110-7.5 Maxi	12	110	7.5	100m	F2403
XHT11-122-7.5 Sovereign CLIPEX COMPATIBLE	11	122	7.5	50m	F24062
				100m	F24065
XHT13-125-7.5 Supreme	13	125	7.5	50m	F2404
				100m	F2406
XHT13-125-5 Ultimate	13	125	5	50m	F2408

Gauge
2.5mm alu / zinc
Horizontal Tensile Strength
1235 - 1550 N/mm²
Vertical Tensile Strength
850 -950 N/mm²

Our advice

XHT13-125-5 is the ultimate in horse fencing with its 50mm vertical wire spacing creating a narrow mesh pattern. X fence Ultimate is designed with safety in mind. The narrower mesh pattern makes it suitable for foals, reducing the risk of hoof entrapment




Deer Fencing



Deer fencing, when properly planned, constructed and maintained, can be an effective way of controlling deer populations and allows different land uses to coexist next to each other. It can also help to protect the public. If you need to contain use heavy gauge. If you wish to exclude you can use heavy or light gauge.

THE ORIGINAL X FENCE — X FENCE — LEAVE NOTHING TO CHANCE

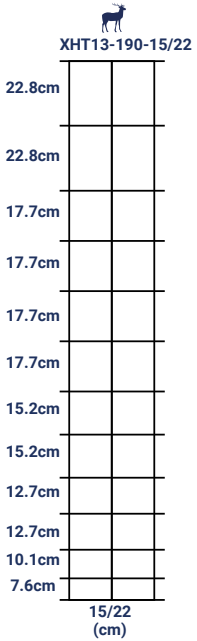

X™ fence®					
Specification	A (cm)	B (cm)	C (cm)	Roll Lengths (m)	Code
XLHT13-190-15 *(Light)* CLIPEX COMPATIBLE	13	190	15	100m	F2441
XHT13-190-15 CLIPEX COMPATIBLE	13	190	15	100m 200m	F2440 F2442
XHT13-190-22 CLIPEX COMPATIBLE	13	190	15	200m	F2446
XHT13-190-22 CLIPEX COMPATIBLE	13	190	22	100m	F2351

Gauge
2.5mm alu / zinc
Horizontal Tensile Strength
1235 - 1550 N/mm²
Vertical Tensile Strength
850 -950 N/mm²

**** XHT17-190-15***
A special order item. Will have long lead times & minimum order quantity is required. Ask us for further details.

Did you know?

X fence knot has been proven to be 24% stronger than the other one piece alternatives.

Combining X fence and Clipex® together gives you a relocatable long-life product for woodland creation projects. Easier to transport and erect than timber.

Deer farmer Matt Smith Testimonial

Click ink to watch video




Otter Fencing

Understand the netting codes



This predator fencing is designed to protect inland fisheries and facilitate highway exclusion. This high spec fence is particularly suitable for the commercial and government sectors. Shorter heights and lighter gauges, coupled with electric fencing can be very cost effective.

THE ORIGINAL X FENCE — X FENCE — LEAVE NOTHING TO CHANCE

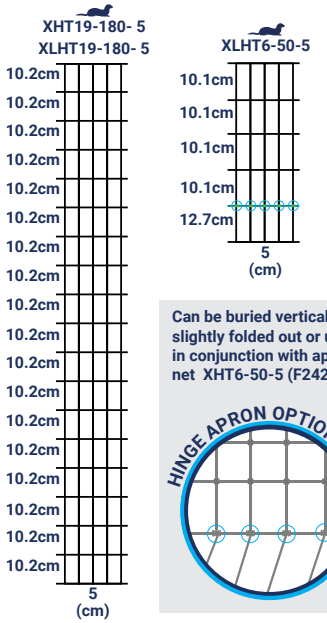

Can be buried vertically, slightly folded out or used in conjunction with apron net XHT6-50-5 (F2428)

Gauge
2.0mm alu / zinc coated high tensile wire throughout.

McVeigh Parker are able to manufacture bespoke sizes and a site visit can be arranged if required. (Min. 2000m)

X™ fence®					
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Code
XLHT19-180-5 *Light*	19	180	5	50m (hinged)	F2460
XHT19-180-5 *Heavy*	19	180	5	50m	F2456
XLHT6-50-5 *Light (Apron)*	6	50	5	100m (hinged)	F2428
XLHT23-240-5 *Light*	23	240	5	50m (hinged)	F2463 Special
XLHT26-180-5 *Light*	26	180	5	50m	F2465 Special

Otter fencing

There are many options for otter fencing - different heights, gauges, one piece, two piece. Our recommendation is to erect a heavy one piece vertical netting, buried, then clip an apron netting above and/or below should there be a need. This will not only make erection easier, the heavier wire will provide a longer, stronger life.




Otter Vs X fence


Click link to watch video




Poultry Fencing

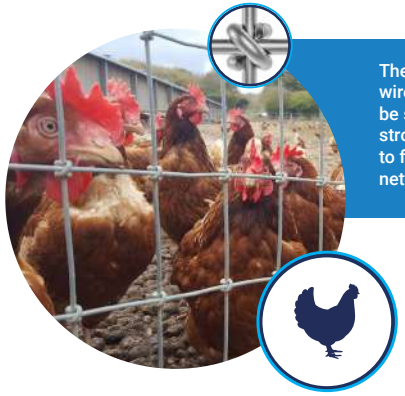

The tensile strength of X fence netting, along with the one-piece vertical wires which almost act as their own intermediate posts, allow posts to be spaced further apart. The X knot joint has been proved to be 24% stronger than similar stiffstay knots. The alu/zinc coating will last three to four times longer. All this combines to make a premium fabricated wire netting that is an effective barrier against predators.

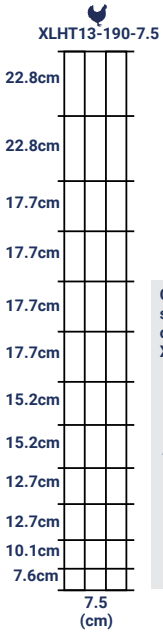



Can be buried vertically, slightly folded out or used in conjunction with apron net XHT6-50-5 (F2428)





The largest free range poultry producer in Southern England was looking to reduce their annual fence maintenance costs and create a secure fence for their farms. The farm manager used his past experience to design an X fence netting pattern that he was confident would exclude predators. The Triple X system was chosen coupled with XHT26-240-5 hinged X fence and cranks.

Read full case study online
https://mcveighparker.com/blog/clipex-chicken-farm/

See how a free range poultry unit used high tensile hinge jointed poultry netting coupled with Clipex® deer and pasture posts to form a protective enclosure.



Click link to watch video

Special netting made to order.
Contact us for further details.

Gauge
2.5mm alu / zinc
Horizontal Tensile Strength
1235 - 1550 N/mm²
Vertical Tensile Strength
850 -950 N/mm²

X ™fence ®					
Specification (CLIPEX COMPATIBLE)	A	B (cm)	C (cm)	Roll Lengths (m)	Code
XLHT13-190-7.5	13	190	7.5	100m Light	F2448
XHT15-158-7.5	15	158	7.5	100m Heavy	F2411
XHT13-190.7.5	13	190	7.5	100m Heavy	F2452

Dog Fencing (X Knot)

Understand the netting codes




Whether you are looking to secure your garden or create a commercial dog walking and exercise area, Dog X fence gives you a long lasting, fully secure enclosure. The one piece vertical wire means less intermediate stakes required, plus you get all the premium advantages of X fence. Combining Clipex® galvanised steel fence posts with X fence premium wire netting you have a fence that's easy to install and maintain and guaranteed for 30 years, this is the choice of the professionals.

Why not view our case study online?
www.mcveighparker.com/dog-fencing

Features
- Suitable for: Dog
- 50m or 100m roll options
- Compatible with Clipex® posts: Yes - Clipex® Deer posts
- Overall Height: 190cm / 1900mm
- No. of line wires: 13
- Distance between vertical wires: 7.5cm / 75mm
- Distance between horizontal wires: See mesh pattern to the right
- Wire gauge: 2.5mm alu/zinc coated high tensile wire throughout
- Horizontal wires tensile strength: 1235/1550 N/mm²
- Vertical wires tensile strength: 850/950 N/mm²
- Knot type: X knot
- Manufactured to BS EN 10223-5
- Exceeds BS EN 10244 Class A
- Wire produced to BS 4102



Gauge
2.5mm alu / zinc
Horizontal Tensile Strength
1235 - 1550 N/mm²
Vertical Tensile Strength
850 -950 N/mm²

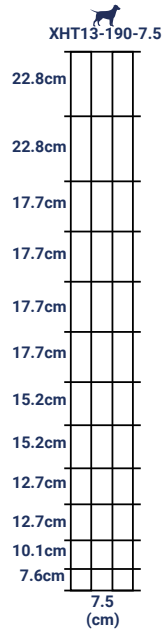



X FENCE
LEAVE NOTHING TO CHANCE
CLIPEX FENCING
TRIPLE X STRAINER


Have You Seen Our Testimonials?

McVeigh Parker is involved with some exciting projects, organisations and individuals.

Check out our testimonials and case studies on our media page.

www.mcveighparker.com/our-media

Badger Fencing

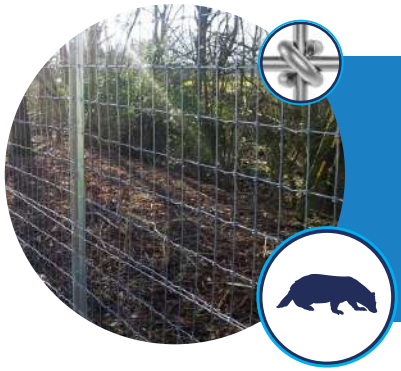



The X knot badger fencing has been designed to withstand the aggressive nature of badgers. Once the base is buried underground, the fence will exclude badgers. We advise that badger fencing should be at least 1250mm high, buried a minimum 450mm into the ground and then angled for 200mm in the direction a badger would approach.


THE ORIGINAL X FENCE

X FENCE


LEAVE NOTHING TO CHANCE

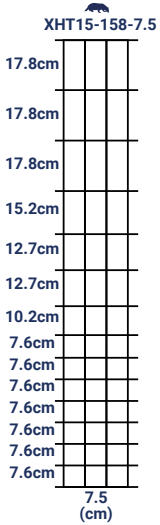

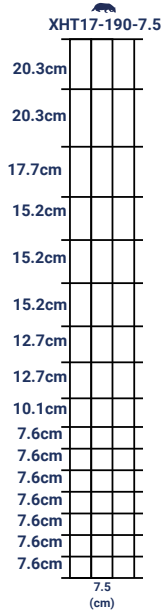



Can be buried vertically, slightly folded out or used in conjunction with apron net XHT6-50-5 (F2428)



X™ fence®					
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Code
XHT15-158-7.5	15	158	7.5	50m	F2410
				100m	F2411
XHT17-190-7.5	17	190	7.5	50m	F2454
XLHT6-50-5 *Light (Apron)*	6	50	5	100m (Hinged)	F2428

Gauge
2.5mm alu / zinc
Horizontal Tensile Strength
1235 - 1550 N/mm²
Vertical Tensile Strength
850 -950 N/mm²

Did You Know?

We also sell J & U pins for securing a wide range of applications.


We also sell badger gates, for more details see our badger fence spec sheet online.





Strength of badger fencing

Click link to watch video







Livestock Fencing (Hinge Jointed)

Understand the netting codes

Cost-effective durable fencing available in light and medium mild wire, as well as light and heavy high tensile options. Hinge joint netting comes in various mesh sizes and patterns to suit specific applications. All our hinge jointed wire netting is manufactured to BS EN 10223-5, all wires used are manufactured to BS4102. Galvanised to BS EN 10244-2 Class A.


Mild Tensile Hinge Joint










Light High Tensile Hinge Joint




High Tensile Hinge Joint











Mild Tensile Hinge Joint					
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Code
L5-60-15 *(Light)*	5	60	15	50m	F2220
C8-80-15 CLIPEX COMPATIBLE	8	80	15	50m	F2210
				100m	F2298 *
L8-80-15 *(Light)* CLIPEX COMPATIBLE	8	80	15	50m	F2200


High Tensile Hinge Joint					
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Code
HT5-60-15	5	60	15	100m	F2329
HT6-80-22	6	80	22	100m	F2335
HT8-80-15 CLIPEX COMPATIBLE	8	80	15	100m	F2311 *
				300m	F2310
HT8-80-22	8	80	22	100m	F2318
HT8-80-30 CLIPEX COMPATIBLE	8	80	30	100m	F2320
LHT8-90-15	8	90	15	100m	F2336


** Most popular & best value.*


Dog Fencing (Hinge Jointed)



Lightweight and easily worked. The added height and smaller mesh pattern make it suitable for garden fencing, alpacas, and is ideal for dog containment. Manufactured from hot-dipped galvanised wire, to BS EN 10223. Heavy galvanised 245grm BS EN 10244-2 Class A

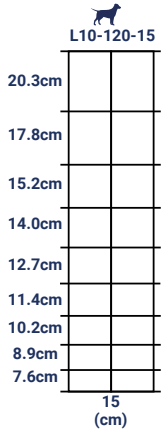

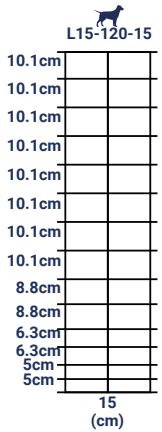

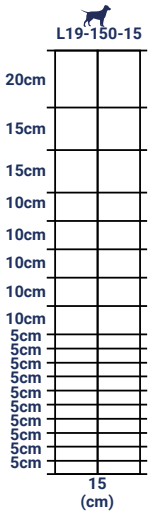

Mild Hinge Joint					
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Code
L10-120-15	10	120	15	50m	F2240
L15-120-15	15	120	15	50m	F2235
L19-150-15	19	150	15	50m	F2231

Gauge
2.5mm alu / zinc (top & bottom)
1.9mm (infills)
Horizontal Tensile Strength
600 - 800 N/mm²
Vertical Tensile Strength
400 - 600 N/mm²

See Also...


Our Triple X dog fence on page page 27.

A Helpful Hint...


X fence stock fence is a premium wire netting that will give a very good return on investment. The one piece vertical wire allows you to space intermediate stakes up to 5m apart. Fewer stakes mean less labour which leads to overall savings. See page 22 for more details.


Deer Fencing (Hinge Jointed)

Understand the netting codes

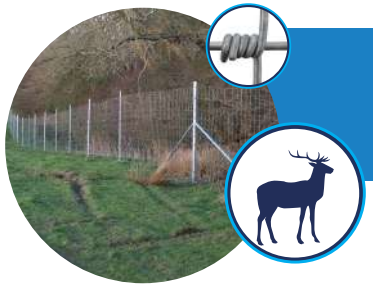

Deer fencing, when properly planned, constructed and maintained, can be an effective way of controlling deer populations and allows different land uses to coexist next to each other. It can also help to protect the public. If you need to contain use heavy gauge. If you wish to exclude you can use heavy or light gauge.

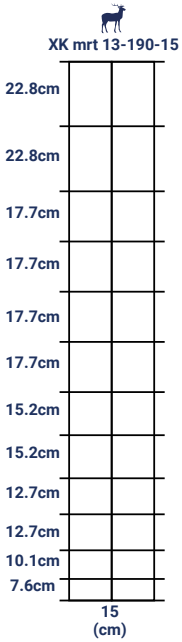

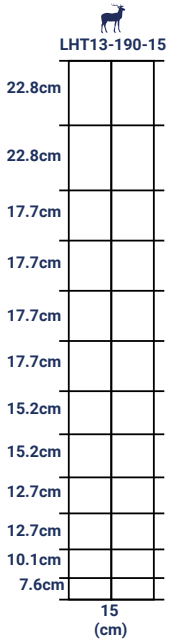

High Tensile Hinge Joint						
Specification	A	B (cm)	C (cm)	Roll Lengths (m)	Coating	Code
LHT13-190-15 *(Light)*	13	190	15	50m	Alu / Zinc	F2353
				100m	Alu / Zinc	F2355
XK mrt 13-190-15 CLIPEX COMPATIBLE	13	190	15	100m	Heavy Galv.	F2350

Hinge Jointed Deer Netting is a more cost effective exclusion fence.

For containment we advise using X fence

Heavy Gauge
2.5mm throughout
Light Gauge
2.5mm top and bottom
2.0mm infill's
Horizontal Tensile Strength
1048 -1248 N/mm²
Vertical Tensile Strength
600 - 800 N/mm²
Coating
XTREME Alu/Zinc coating, exceeds BSEN 10244-2 lasts 3-4 times longer than galv

Features XTREME alu/zinc reinforced coating.



Why Alu/Zinc coating?

Alu/Zinc coating simply lasts longer than galvanised coating, especially important in high corrosive areas. The average atmospheric zinc corrosion rates across the UK and Ireland are normally less than 1µm (Micron), per year, a typical 70µm coating can provide over 70 years of maintenance-free life.
The British Standard BSEN 1461 coating lists a sacrificial galvanised zinc coat of 325 g/m2,(avg 45microns). X fence exceeds these standards.

To check out the corrosive rate of your location log onto this link

www.galvanizing.org.uk/corrosion-map/

MP wire and posts unless otherwise stated conform or exceed BSEN 1461.T

Line Wire



High Tensile XTRALIFE Alu/Zinc Coated

Gauge	Approx. Length	Code
2.50mm	651m	F2142
3.15mm	410m	F2147

- Tensile strength : 1250 -1350 (N/mm2)
- Coating weight : min 240g/m2
- Wire diameter tolerance : +/-0.04(mm)
- Coil ID / Coil OD : 570 mm / 730 mm approx.
- Alu/Zinc coating which exceeds BSEN 10244-2 Class A

High Tensile Line Wire

Gauge	Approx. Length	Code
2.00mm	1017m	F2104
2.50mm	651m	F2140
3.15mm	410m	F2145
4.00mm	254m	F2150

- Specifications as above
- Heavily galvanised to BSEN 10244-2 Class A

Mild Line Wire

Gauge	Approx. Length	Code
1.89mm	1190m	F2102
2.50mm	651m	F2115
3.15mm	410m	F2120
4.00mm	254m	F2125

- Tensile strength : 350 -550 (N/mm2)
- Coating weight : min 240g/m2
- Wire diameter tolerance : +/-0.04(mm)
- Coil ID / Coil OD : 570 mm / 730 mm approx
- Heavily galvanised to BSEN 10244-2 Class A

Tying Wire



- Flexible, easy to work with
- Galvanised for long life protection
- Approximately 100m

- Protected against corrosion
- Hot-dip galvanised with added layer of green plastic
- Approximately 100m

Wire	Gauge	Coil Length	Code
Galvanised	1.60mm	100m	CL4219
PVC	1.60mm/2.50mm	100m	CL4220



Rapid Reel Bobbins

- Can be used to increase the height of a fence, as straining wire for posts or in electrical fencing applications.
- Available in a choice of diameters to best suit the application.
- Supplied on wooden reels with hessian handles for durability, easier handling, easier pay off and easier disposal.
- Tensile strength of wire 1050N/mm2
- Weight of bobbin 25kg

Type	Gauge	Approx. Length	Code
High Tensile	2.00mm	1000m	F2105
	2.50mm	600m	F2141
	3.15mm	400m	F2144

Barbed Wire

F2015



High Tensile Alu/Zinc

- 2.0mm wire gauge
- Manufactured to BSEN 10223-1
- Alu/Zinc coating exceeds to BSEN 10244-2 Class A

F2013



High Tensile BLACKMAX Bezinal

- 2.0mm wire gauge
- Manufactured to BSEN 10223-1
- Exceeds BSEN 10244-2 Class A
- Available in 500m rolls

F2000



Mild Steel

- 2.5mm wire gauge
- Manufactured to BS EN 10223-1
- Heavily galvanised to BSEN 10244-2

Barb Wire Type	Line wire dia & Tensile Strength	Barb dia & Tensile Strength	Length	Code
Alu/Zinc	2.0mm dia - 1050-1250 N/mm²	1.9mm dia - 440-540 N/mm²	200m	F2015
Heavy Galvanised	2.0mm dia - 1050-1250 N/mm²	1.9mm dia - 440-540 N/mm²	200m	F2014
* Bezinal Black Tipped	2.0mm dia - 1050-1250 N/mm²	1.9mm dia - 440-540 N/mm²	500m	F2013
Galvanised Mild Steel	2.5mm dia - 415-495 N/mm²	2.0mm dia - 415-495 N/mm²	200m	F2000

Black Benzinal Barbs, why?
They are three times more resistant to rust due to its unique outer black Benzinal coated barbs, as the barbs come into livestock contact they are better treated for a longer life.

Concertina Barbed Wire Tape





"Protect your premises, instantly"

- Outer Dia. coil 450mm (18")
- Length/Coil : 10m
- Wire Dia. 2.5mm
- Razor Centre Distance 35mm
- Razor Thickness : 0.5mm
- Razor Length : 20mm

Razor wire is effective as a secondary line of defence, widely used by many businesses to prevent unauthorised access.

The property owner needs to ensure the use of barbed tape does not infringe criminal or civil law

Hexagonal Wire



Hexagonal wire, also known as hexagonal mesh, Chicken or Rabbit wire, is a versatile and widely-used fencing material with a characteristic hexagonal pattern. It is made from galvanized steel wire, creating a flexible and durable mesh. This type of wire has a wide range of applications due to its unique properties and benefits.

Some of the primary uses of hexagonal wire:

1. Garden Fencing: Hexagonal wire is commonly used in gardening and landscaping to create protective enclosures for gardens, flowerbeds, and vegetable patches.
2. Rabbit Fencing: Farmers use hexagonal wire to protect crops, often burying to prevent digging, heavier gauge netting is recommended.
3. Poultry and Pheasant Enclosures: Hexagonal wire is widely used in poultry and pheasant enclosures, either one piece or more common is a smaller mesh half way with a larger mesh top net, providing a height of over 1.8m.
4. Small Animal Cages and Enclosures: Hexagonal wire is used to build cages and enclosures for small pets like rabbits, guinea pigs, and birds. The wire mesh offers a safe and well-ventilated living space for these animals.
5. Tree Guards: Hexagonal wire is used to protect young saplings from rabbits and deer.
6. Bird Protection: Hexagonal wire with a finer mesh is utilized as eave protection, preventing birds, squirrels from entering gaps and vents.
7. Decorative Applications: Beyond practical uses, hexagonal wire is sometimes utilized for decorative purposes. It can be incorporated into artistic installations, sculptures, and garden features to add an intriguing and unique aesthetic.

Overall, hexagonal wire's versatility, durability, and relatively low cost makes it a popular choice for a wide range of applications, from agricultural and gardening needs to civil engineering projects and creative endeavours.

McVeigh Parker stock two types

Fortress Super 6 – Is our premium hexagonal super 6 netting offering exceptional durability and versatility. Unlike light galvanized netting, this super 6 hexagonal wire boasts an impressive six times longer lifespan. Hot dip galvanised after manufacture gives it great corrosive resistance. If you are looking for the best longest lasting hexagonal netting then super 6 should be your wire of choice, giving far greater return on your investment.

Fortress Value – Is our competitively priced range of hexagonal wire netting suitable for many projects, ideal for those working on a tight budget prioritizing cost-effectiveness and affordability over long term durability.

Rabbit Hexagonal Wire

LASTS UP TO 6X LONGER THAN LIGHT GALVANISED WIRE

- 50m rolls
- Tensile strength 350-450 N/mm²
- Heavy galvanised to BS EN 10224-2
- Hot dip galvanised after manufacture

FORTRESS SUPER 6 HEX WIRE

Height	Mesh	Gauge	Application	Code
1050mm	31mm	1.2mm (18g)	*	F1G3230
1200mm	31mm	1.2mm (18g)	*	F1G3250

Best return on investment

- 50m rolls
- Tensile strength 350-450 N/mm²
- Pre-galvanised finish

** Most popular*

FORTRESS VALUE HEX WIRE

Height	Mesh	Gauge	Application	Code
600mm	31mm	1.0mm (19g)		F1C3200
1050mm	31mm	1.0mm (19g)	*	F1C3221
1050mm	31mm	1.2mm (18g)	*	F1C3230
1200mm	31mm	1.0mm (19g)		F1C3241
1200mm	31mm	1.2mm (18g)	*	F1C3250
1500mm	31mm	1.0mm (19g)		F1C3255
1800mm	31mm	1.0mm (19g)		F1C3260
1800mm	31mm	1.2mm (18g)		F1C3265



Reinforced Horizontal Wire

Other Hexagonal Wire

- 50m rolls
- Tensile strength 350-450 N/mm²
- Pre-galvanised finish

FORTRESS VALUE HEX WIRE

Height	Mesh	Gauge	Application	Code
900mm	13mm	0.9mm (20g)		F1C3025
600mm	19mm	1.0mm (19g)		F1C3054
900mm	25mm	1.0mm (19g)		F1C3170
900mm	25mm	1.2mm (18g)		F1C3165
1200mm	25mm	1.0mm (19g)		F1C3140
1200mm	25mm	1.2mm (18g)		F1C3175
1800mm	25mm	1.0mm (19g)		F1C3190
900mm	50mm	1.0mm (19g)		F1C3370
1200mm	50mm	1.0mm (19g)		F1C3380
1800mm	50mm	1.0mm (19g)		F1C3400

Sizes and gauges are meant as a guide, comparable to market standards and tolerances.

Did you know?

We also stock and supply line wire, netting pliers, clips and fixings, timber or steel posts.
Combining hexagonal wire with Clipex® steel posts will give you a fast, easy to erect fence.
Using Clipex® steel posts for poultry or pheasant pens allows you to relocate the pens easily, should you wish to provide fresh foraging areas and maintain a healthy environment for your birds.

Fresh ground reduces the build-up of faeces and waste, which can help prevent the spread of diseases and parasites. Plus the posts are recyclable at the end of their life.

CLIPEX –COMPATIBLE–










Plastic Deer / Pheasant Netting

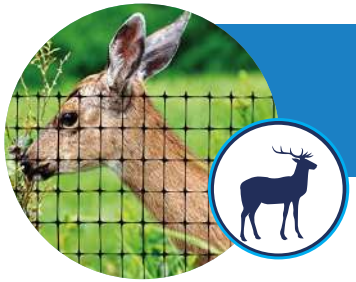

High tensile strength tough yet lightweight unobtrusive extruded plastic netting. An effective yet economical exclusion barrier, the perfect solution for an immediate and quick deer protection.

HD UV-Protected Polypropylene Low-Visibility Deer Net Fencing



This black netting creates an unobtrusive barrier, blending into the background, making it ideal for gardens. Lightweight, UV stabilised, rot proof and easy to install. This particular mesh and 1.8m fence height are designed to exclude Muntjac, Sika and Roe deer, although Fallow deer will be deterred we recommend a higher plastic or ideally a permanent galvanised wire netting fence for total exclusion.

Erection : McVeigh Parker have a full range of posts and accessories to help with your install. The netting can simply be cable tied to line wires, battened to timber posts or used with Clipex® steel posts and line wire system for a fully moveable long lasting fence system.



Netting Type	Dimensions	Code
Deer & Pheasant Net	1.8m x 100m - 50mm x 50mm	NET250
Deer & Pheasant Net	1.2m x 100m - 50mm x 50mm	NET251

Suitable for many other applications. Such as pheasant pens, fruit protection, vegetable and shrub protection, pool/pond netting.



Aviary Mesh



Mesh	Gauge	Height	Code
13x13mm	1.0mm	900mm	F9300
		1200mm	F9338
25X13mm	1.0mm	900mm	F9325
	1.6mm	900mm	F9309
25x25mm	1.0mm	900mm	F9320
	1.6mm	900mm	F9310
		1200mm	F9340
		1800mm	F9345
	2.00mm	900mm	F9308



- Ideal solution for bird, rabbit and rodent enclosures
- Also suitable for domestic and farm fencing of small mammals
- Stronger than traditional hexagonal mesh
- Hot-dip galvanised for longer life



13x13mm



25x13mm



25x25mm

Welded Mesh

Welded Mesh Galvanised





- Self-supporting, strong long lasting netting
- Ideal for numerous uses, security fencing
- Dog compounds, poultry pens & tree guards
- Electro welded uniformed mesh pattern joints
- Heavily galvanised coating to BS 443

Gauge	Length	Mesh	Height	Code
2.50mm	25m	50x50mm	900mm	F9100
			1200mm	F9110
			1400mm	F9120
			1800mm	F9145
3.0mm			900mm	F9105
			1200mm	F9115
			1400mm	F9125
			1500mm	F9140
			1800mm	F9150

Welded Mesh PVC Coated





- Self supporting, strong PVC coated mesh
- Ideal for perimeter fencing, less visual impact
- Green PVC coated finish RAL6055
- Black available

Gauge	Length	Mesh	Height	Code
2.5mm & 3mm	25m	50x50mm	900mm	F9178
			1200mm	F9179
			1400mm	F9185
			1800mm	F9180

Security Fencing

Keep your land, property or business safe with our security fencing.
We stock a wide range, so whether your application is industrial, commercial or agricultural, we will have a security fencing system suitable for your requirements. Palisade, Meshed Panels, Chain Link and Welded Mesh are all available.

Meshed Panels

VMEX V3 Mesh Panels





Features
- Compliant to BS 1722 pt.14
- M8 security fixings
- Top flat section of panel allows easier stepping of mesh
- Standard colours Green RAL 6005 + Black RAL9005
- Polyester Powder Coated to a choice of colours
- Height - 1200mm,1800mm, 2000mm, 2400mm, 3000mm
- Wire Diameter - 4mm verticals & 5mm horizontals

Suitable for:
- Commercial Development
- New Build Housing
- Hospitals

Cost effective perimeter fence

ZEBEX Z3 Mesh Panels





Features
- Compliant to BS 1722 pt.14
- M8 security fixings
- Choice of colours available
- Height - 1800mm
- Wire Diameter - 4mm verticals & 4mm horizontals

Suitable for:
- Commercial Business
- Recreation Areas
- Hospitals
- Airports
- Multi Storey Car Parks

Most popular perimeter fence

Duex Mesh Panels



Features
- Compliant to BS 1722 pt.14
- M8 security fixings
- Rigid double wire design
- Polyester Powder Coated to a choice of colours
- Heights - 1230mm, 1830mm, 2030mm, 2430mm, 3030mm
- Wire Diameter - 6mm verticals & twin 8mm horizontals

Suitable for:
- Schools, Colleges & Universities
- Commercial Premises
- Industrial Units
- Theme Parks

Also available as 868 rebound fencing. Ideal for sports grounds and zoo's

Bow Top Railings



Features
- Compliant with BS 1722 Pt. 9
- Security Fixings
- Stepping Cleats
- Welded Construction
- Hot Dip Galvanised to BS EN ISO 1461
- Polyester Powder Coated option
- Various Designs Available

Suitable for:
- Recreation Areas
- Schools
- New Build Housing

Steel Palisade



Features
- Hot Dip Galvanised
- Sturdy And Secure Fencing Solution
- Components Supplied Loose For Easy On-Site Construction
- W Profile, Triple Point
- Available In Various Profiles, Gauges And Finishes

Suitable for:
- MOD
- Police Stations
- Secure Units
- Airports
- Hospitals
- Schools
- Utility Suppliers

358 Mesh



Features
- Compliant With BS 1722 Pt. 14
- Security Fixings
- Anti-Climb Fence
- Panel Heights Available Up To 5.2m
- Polyester Powder Coated
- Suitable For Many Applications
- Narrow Apertures Very Secure

Suitable for:
- MOD
- Police Stations
- Secure Units
- Airports
- Hospitals
- Schools
- Utility Suppliers

Vertical Bar Railings



Features
- Compliant with BS 1722 Pt. 9
- Security Fixings
- Stepping Cleats
- Welded Construction
- Hot Dip Galvanised to BS EN ISO 1461
- Polyester Powder Coated Option
- Various Designs Available

Suitable for:
- Perimeter Fencing
- Retail Outlets
- Commercial Business
- New Build Housing



Chain Link

We offer a range of heavy chain link and PVC chain link fencing to suit a variety of domestic and agricultural purposes. Chain link fencing is popular for its versatility and affordability; providing a cost-effective secure fencing solution.

Chain link fence provides an effective security fencing or recreational enclosure for domestic or industrial purposes. It is easy and quick to install, providing a long-lasting and durable fencing solution.

Chain Link Galvanised





- Galvanised mild steel woven and galvanised to BSEN10244-2.
- Manufactured to BSEN1722-1 2006.

Gauge	Mesh	Length	Height	Code
2.50mm (Standard)	50mm	25m	900mm	CL1100
			1200mm	CL1105
			1800mm	CL1120
			2400mm	CL1163
3.0mm (Heavy)		25m	900mm	CL1130
			1200mm	CL1135
		12.5m	1800mm	CL1150
			2400mm	CL1165

Green PVC Chain Link





- Green PVC coated finish RAL6055
- Manufactured with Galvanised Grade 2 Core Wire
- Rolls come complete with 52m green linewire (900 & 1200mm)
- 78m green linewire (1400 & 1800mm)

Gauge	Length	Mesh	Height	Code
2.24/ 3.15mm	12.5m	50mm	2400mm	CL1250
	25m		900mm	CL1225
			1200mm	CL1230
			1400mm	CL1235
			1800mm	CL1245

High Tensile Chain Link





Commonly known as Super 70 or Dragon HT is over twice the strength of traditional chain link, it has a smaller mesh pattern for greater security and rigidity.

Most commonly used on railways.

Coated with zinc, aluminium, magnesium with a green anti-corrosion barrier giving enhanced protection which lasts five times longer than heavily galvanised wire to BS EN 10244-2 class A

Gauge	Length	Mesh	Height	Code
3.0mm	12.5m	40mm	1.4m	CL1215
	12.5m		1.8m	CL1220

Temporary Fence Panel Options



Anti-Climb Wire Mesh Temporary Fence Panel

Designed to offer a quick, efficient, and cost-effective temporary perimeter solution.

Dimensions (mm):
3450(W) x 2000(H) x 40(D)
Anti Climb Mesh: 262mm x 43mm
Panel mesh dia: 3.2mm Horizontal and vertical
Frame diameter: 38.1mm throughout
Weight (kg): 13.8
Finish: Pre-Galvanised



Pedestrian Gate Round Top

MP Pedestrian gates carry a number of key advantages over market alternatives.

Dimensions (mm):
1151(W) x 2000(H) x 40(D)
Weight (kg): 14.4
Finish: Pre-Galvanised

- **Stronger frame reinforced with horizontal bar, profile cu tubes and enhanced welds.**
- **Professional finish and made-to-fit mesh greatly**

Temporary Fence Panel Accessories

Coupler Lite






Dimensions (mm):
136(W) x 26(H) x 78(D)
Weight (kg): 0.21
Finish: Pre-Galvanised

Coupler – recommend two per panel 0.21kg

Thermo-Plastic Foot (Std)





Dimensions (mm):
771(W) x 134(H) x 196(D)
Weight (kg): 16
Finish: Self Coloured

Fence Stabiliser



Dimensions (mm):
988(W) x 1487(H) x 150(D)

Weight (kg): 2.5
Finish: Pre-Galvanised

Stabilising Support Bars are especially useful for temporary fencing systems that are erected on slopes, uneven ground, or located in exposed areas susceptible to high winds. Also known as a 'Backstay', the Stabilising Support Bar is positioned at an angle and is braced and bolted into the ground 988mm away from the panel using Ground Pins.

We can offer a wider array of stabilising products and accessories to suit your application and location.



DURABLE•
BEAUTIFUL•
DEPENDABLE•

DURA² TREATED TIMBER

HIGH QUALITY FENCING TIMBER

DURA²® is synonymous with quality performance across Europe thanks to a patented enhance high pressured treatment base of Tanalith-E®

- **Pedigree durable product.**
- **Controlled drying process.**
- **Safe to both livestock and humans, no leaching.**
- **Produced from slow grown European pinewood only.**
- **Homogenous dark brown chic colour.**
- **20 year manufacturer's warranty.**

See pages 44-45 for more details



Timber Fencing

Whether you're repairing an existing fence or building a new one, we stock a wide range of posts and stakes, post and rail kits, stud rail horse fencing, including posts, struts and strainers. All our timber is supplied by fully FSC certificated producers from carefully managed forests, all softwood timber is treated to BS8417.

What timber products are available at McVeigh Parker?

- Pressure treated pine stakes, sawn posts, rails, strainers and boards.
- Pressure creosoted pine stakes, rails, sawn posts, strainers and rails.
- Sweet chestnut stakes, strainers and cleft posts and rails.
- DURA² pine pressure treated stakes, rails, strainers
- ScanPole Pole+, Experience premium fencing with an extended lifespan!



Pressure treated to BS8417
With a water based wood preservative that contains copper and proven organic biocides. Typical desired life on UC4 treated timber is 15 years.

Kiln dried
To an adequate moisture content in line with BS8417.



The British standards
BS8417 state timber longevity as "Desired service life". The desired service life does not provide a guarantee, but merely an indication of the expected performance of the product.

The BSEN 335
Defines User classes which lists desired service life of treated timber and is intended as a guide only, the purchaser must decide whether the product is suitable for their particular purpose. McVeigh Parker stock only UC4 pine in-ground contact timber.

Use Class 4
External timbers used in ground or fresh-water contact.

Slow grown timber
Scots Pine (Pinus Sylvestris), larch or similarredwood only.

This slower grown timber creates a denser wood with higher mechanical properties.

Stick layered packs
To give quicker drying and better treatment penetration.



Identification
Marked for proof of manufacturer and full traceability.



Colour
Pressure treated timber has an initial natural green colouration. Once exposed to air, the green colour slowly weathers to a golden brown and in the longer term becomes a natural silver grey.

DURA² starts off almost black slowly ageing to dark brown.



For full details on all our timber, please check out our full timber guide online or ask one of our knowledgeable team who will be happy to help.

Source : All our timber is sourced from carefully managed forests and produced by FSC/PEFC certificated producers.

DURA² Fencing

DURA² is the patented production process which is sustainable, environmentally friendly and the cost effective alternative to creosoted timber.

This new process extends the life span of the timber to 20 years and more. DURA² is the answer for those looking for a longer lasting timber fence with an attractive appearance. Guaranteed for 20 years.

The unique DURA² timber procedure starts with timber selection, with wood carefully selected from sustainable woodlands. Once felled it goes through an initial controlled drying process, then impregnated to saturation point with the improved treatment agent.

After the first treatment the timber goes through a deep drying process, then retreated once again.

This double treatment process provides the strongest protection and the most durable treated softwood timber for fencing.

This unique technique creates a fence timber of the highest quality. In addition, the wood gets a chic look due to the dark colouring without any unpleasant odours or carcinogenic properties.





DURA² EndSeal protects the exposed cut surfaces in your wood from water, mould and insect decay as well as UV, ageing and moisture in overground applications.



Dura² Endseal paint available in 750ml cans *F5800*

Benefits of using DURA² Timber

- Pedigree durable product.
- Controlled drying process.
- Safe to both livestock and humans, no leaching.
- Produced from slow grown European pinewood only.
- Timber treated twice with deep drying between the two treatments.
- Pressure treated with a high concentrate.
- DURA² is an enhanced and patented treatment process using Tanalith E preservative.
- DURA² has the appearance of creosoted timber without the smell or carcinogenic properties.
- Homogenous dark brown chic colour.
- 20 year manufacturer's warranty.



Check out the DURA² spec sheet. Click link above

Click link to view full DURA² range

Initially stocked in certain sizes, however larger projects and full artic loads are available, contact us with your requirements. Stockist, trade and contractor rates available.

DURA² TIMBER RANGE

Fencing stake/Strut

*** 1.65m x 90mm pointed**	**F5820**
*** 1.8m x 90mm pointed**	**F5825**
*** 2.5m x 90mm pointed**	**F5830**
2.1m x 90mm pointed	
2.7m x90mm pointed	
3.0m x 90mm pointed	
1.8m x100mm pointed	
2.0m x100mm pointed	

Strainer

*** 2.5m x 140mm pointed**	**F5840**
2.5m x 160mm pointed	
2.5m x 180mm pointed	
2.75m x 180mm pointed	
3.0m x 140mm pointed	
3.0m x 160mm pointed	

*** Stocked product lines**

DURA² Gates and posts also available on request

Rails

3.60m x 87mm x 38mm Rails sawn	**F5880**
4.0m x 100mm x 50mm Rails sawn	
4.0m x 150mm x 47mm Boards sawn	

Sawn Posts - 4 way pointed

1.8m x 125mm x 75mm sawn post	**F5870**
2.1m x 125mm x 75mm sawn post	**F5875**

Other products available by request.



3.5m x 100mm half round rail spruce

DURA² Gates and posts also available on request

TIMBER

- **OVER £10,000,000 WORTH OF TIMBER SOLD ANNUALLY**
- **QUANTITY DISCOUNTS, TRADE RATES, DIRECT LOADS, ONE PIECE TO FULL ARTIC**
- **MECHANICAL OFFLOADING**



- Identification branded for traceability
- Pressure treated to BS 8417
- Kiln dried below 28% moisture content
- Sticked layers

- Winter cut
- Available in quarters / halves & rounds

McVeigh Parker have been supplying traditional fencing timber since 1979. With over one million stakes sold annually, we are confident we can provide you with quality products, at the right price, treated to the correct user class, for your next fencing project. We have a range of timber and post stakes for use as part of your traditional timber fencing project. Fencing struts and stakes with a mix of creosoted strainers are available in sizes to suit your needs.

Stakes, Strainers & Rails

Stakes ROUND

Description		Code
1.65m x 75-100mm dia round	*	F8534
1.80m x 75-100mm dia round	*	F8634
2.10m x 75-100mm dia round	*	F8734
2.40m x 75-100mm dia round		F8834
2.70m x 75-100mm dia round		F8934
3.00m x 75-100mm dia round		F8334

Stakes

Description	Code
1.65m x 50-75mm dia round	F8523
1.80m x 50-75mm dia round	F8623
2.40m x 50-75mm dia round	F8823

Stakes, Half round must have 4 way points

Description	Code
1.65m x 100-125mm half round	F8545H
1.80m x 100-125mm half round	F8645H
1.80m x 125-150mm half round	F8646H
2.10m x 100-125mm face half round	F8745H

Strainers, fourway pointed

Description		Code
1.80m x 100-125mm dia round	*	F8645
2.10m x 100-125mm dia round	*	F8745
2.10m x 125-150mm dia round	*	F8756
2.10m x 150-175mm dia round		F8767
2.4m x 100-125mm dia round		F8845
2.4m x 125-150mm dia round	*	F8856
2.4m x 150-175mm dia round	*	F8867
2.4m x 175-200mm dia round	*	F8878
2.7m x 100-125mm dia round		F8945
3.0m x 100-125mm dia round		F8345
3.0m x 125-150mm dia round	*	F8356
3.0m x 150-175mm dia round		F8356

Struts

Description		Code
2.40m x 75-100mm dia round. Blunt	*	F8834S

Rails

Description	Code
3.66m x 100-125mm dia Half round	F3120

Machined half round rails

Description		Code
3.66m x 100mm dia round	*	F5120

Machine Sawn Timber

Machine Rounded Stakes

Description	Code
1650mm x 60mm stake - UC4	F8M515
1650mm x 75mm stake - UC4	F8M520
1650mm x 85mm stake - UC4	F8M522
1650mm x 100mm stake - UC4	F8M525
1800mm x 60mm stake - UC4	F8M610
1800mm x 75mm stake - UC4	F8M615
1800mm x 85mm stake - UC4	F8M618
1800mm x 100mm stake - UC4	F8M620
1800mm x 110mm H/Round - UC4	F8M625
1800mm x 125mm stake - UC4	F8M630
2100mm x 75mm stake - UC4	F8M700
2100mm x 85mm stake - UC4	F8M702
2100mm x 125mm stake - UC4	F8M705
2100mm x 150mm stake - UC4	F8M706
2100mm x 100mm stake - UC4	F8M720
2400mm x 60mm stake - UC4	F8M805
2400mm x 75mm stake - UC4	F8M810
2400mm x 85mm stake - UC4	F8M812
2400mm x 100mm stake - UC4	F8M815

Machine Rounded Strainers

Description	Code
2400mm x 125mm stake - UC4	F8M820
2400mm x 150mm stake - UC4	F8M825
2400mm x 175mm stake - UC4	F8M830
2400mm x 200mm stake - UC4	F8M935

Machine Rounded Round Poles


Description	Code
3660 x 100mm Machine Round Jump Pole UC3	F5110
3000mm x 125mm Machined pole - UC3	F5105
3000mm x 150mm Machined Pole - UC4	F8M950
3600mm 150mm Machined Pole - UC4	F8M980









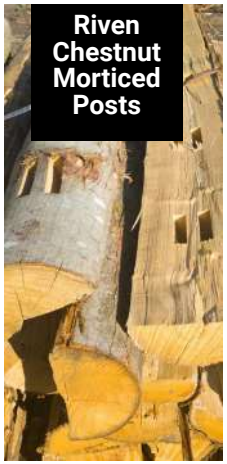

Sawn Timber

Posts

Description		Code
UC4 1800 x 75 x 75mm Sawn Post Redwood		F8100
UC4 2400 x 75 x 75mm Sawn Post Redwood		F8150
UC4 3000 x 75 x 75mm Sawn Post Redwood		F8175
UC4 1800 x 100 x 100mm Sawn Post Redwood		F8110
UC4 2400 x 100 x 100mm Sawn Post Redwood		F8160
UC4 2700 x 100 x 100mm Sawn Post Redwood		F8173
UC4 3000 x 100 x 100mm Sawn Post Redwood		F8180
UC4 1800 x 75 x 125mm Ptd Post Redwood	*	F8120
UC4 2100 x 75 x 125mm Ptd Post Redwood	*	F8140
UC4 2400 x 75 x 125mm Ptd Post Redwood	*	F8170
UC4 1800 x 75 x 150mm Ptd Post Redwood		F8130
UC4 2100 x 75 x 150mm Ptd Post Redwood	*	F8145
UC4 2400 x 75 x 150mm Ptd Post Redwood		F8171

Rails

Description		Code
Sawn Rail 3600 x 38 x 88mm Treated	*	F6990
Sawn Rail 3600 x 38 x 100mm Treated		F6992
Sawn Rail 3600 x 47 x 100mm Treated	*	F6994
Sawn Rail 3600 x 32 x 76mm Treated		F6999
Sawn Rail 4000 x 47 x 100mm Treated		F6998
Sawn Rail 4200 x 47 x 100mm Treated		F6995
Sawn Rail 4800 x 47 x 100mm Treated	*	F6996

Timber Boards

Description	Code
Gravel Board 1830 x 150 x 22mm Treated	F6230
Gravel Board 1800 x 150 x 38mm Treated	F6231
Gravel Board 2400 x 150 x 22mm Treated	F6232
Gravel Board 3000 x 150 x 22mm Treated	F6233
Gravel Board 3600 x 150 x 22mm Treated	F6236
Gravel Board 3600 x 150 x 38mm Treated	F6240
Gravel Board 3600 x 150 x 47mm Treated	F6997
Gravel Board 3600 x 225 x 38mm Treated	F6238
Path Edging Board 4200 x 100 x 22mm Trtd	F6247
Path Edging Board 3600 x 100 x 22mm Trtd	F6248

Sawn Morticed Posts

Description	Code
UC4 2100 x 100 x 125mm Sawn 2WW & 2 x Twin Mortice - Blunt End	F8156
UC4 2100 x 100 x 125mm Sawn 2WW & 3 x Twin Mortice - Blunt End	F8157

Riven Chestnut Morticed Posts

Description	Code
Cleft two twin morticed posts 2.0m	F4140
Cleft three twin morticed posts 2.0m	F4145

*** Stocked in Pressure Creosoted**

Instruction Guide For Fence Post Installation

Use the guide below to help you with your fence post installation.

1. Calculate the hole size needed for the fence post. This depends on post height and style of fence.
2. Fence posts can be set in concrete or soil with a 50mm ballast bed (see Fig 1 & 2), which will allow good drainage around the post base.
3. It is recommended 1/3 of fence post height is placed into hole for added stability.
4. Fence posts should not placed on top of concrete (see Fig 4). It will prevent post drainage and will lead to early failure under some weather conditions.
5. Concrete should be poured 50mm from ground line.
6.
7. The remaining part of the hole should be filled with ballast or gravel to allow post drainage. This will also restrict weed growth at post base which can cause damage.

An alternative fence post installation guide can be seen in Fig 3.

Use illustrations below with the guide above to further assist with installation

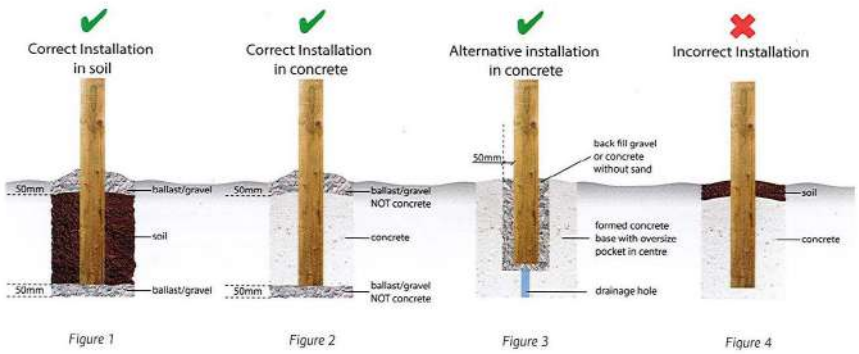


Figure 1 Figure 2 Figure 3 Figure 4

Post & Rail Fencing

Timber post and rail is an iconic sight in the British landscape, both attractive and functional. Often used for paddock fencing, livestock management and roadside fencing as well as an aesthetic look for domestic properties. We stock a wide range of traditional timber post and rail options for both domestic and agricultural purposes.

The number of rails and the spacing between posts can vary depending on the intended purpose, visual preferences, and the type of animals being contained.

Half Round

Cundy half round rails, slight irregular appearance.


Rails - 3.66m x 100/125mm face

Stakes – Half round 1.8m, 2.1m, 125/150mm face

Full round 1.8m, 2.1m, 2.4m, 100/125 dia

Available in pressure treated green, UC4 pine for all in ground contact timber.



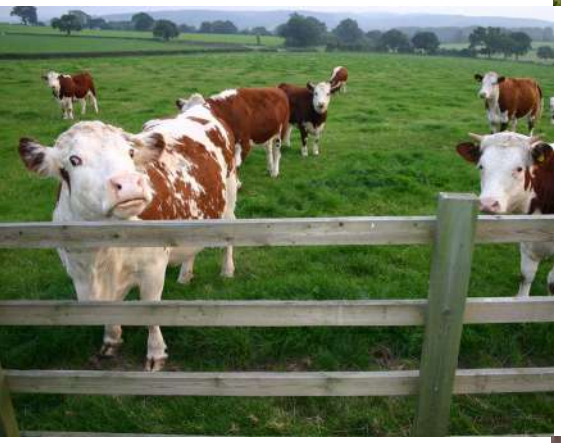

Sawn (Motorway) Post & Rail

Sawn finish timber most commonly seen along motorways.

Rails - 3.60m x 88mm or 100mm x 38mm or 47mm profile

Posts – 1.8m, 2.1m, 2.4m x 125mm or 150mm x 75mm, four way pointed

Available in pressure treated green, Pressure creosoted and DURA² (in select sizes) UC4 pine for all in ground contact timber.

Post and Wire Combinations

We can supply various combinations using posts with top rail and X fence wire infill.

Contact us for more details, advice and a quote.



Machined Half Round

Machined half round fencing creates a more uniformed neat appearance.

Rails - 3.66m x 100mm face

Stakes – Half round 1.8m, 2.1m, 110mm face

Full round 1.8m, 2.1m, 2.4m, 100mm, 125mm dia

Sawn 1.8m, 2.1m, 2.4m x 125mm x 75mm posts can also be a suitable combination.

Available in pressure treated green, Pressure creosoted and DURA² (in select sizes) UC4 pine for all in ground contact timber







Riven Chestnut Post & Rail

This is a traditional and durable type of fence construction that uses cleft (split) chestnut of irregular shapes which give it a unique handcrafted rustic appearance. Produced from sustainable coppiced UK woodlands.

For those looking for a more symmetrical appearance combine sawn morticed posts with cleft rails.

Rails - 2.9m x irregular profile of approx. 325-350mm girth , scarf ended. Chestnut

Posts – 2.0m x 180-210mm cleft face, twin morticed to suit two or three rail.

Chestnut 2.1m x 125mm x 100mm, twin morticed to suit two or three rail. Sawn treated

Available in all chestnut (no treatment required) or pressure treated sawn posts

Did You Know?

You can extend the life and protect your fence from livestock damage by simply adding cost effective insulators to your fence. We supply a wide range of offset electric insulators, tape, rope and wire.

Click link to view full post and rail fencing product range

Domestic Fencing

Our garden fencing stock includes panel fencing, fence kits and wattle hurdles.
Our attractive domestic fencing range is perfect for gardens, roadside areas or as screening.



Panel Garden Fencing

Feather Edge Panels



- Pressure treated softwood for long-life (not dipped)
- Fully framed
- Heavy more durable construction
- Easy to install, suitable for timber or slotted concrete posts. Just add quick mix cement

Size	Code
900mm x 1830mm (3' x 6')	F6112
1200mm x 1830mm (4' x 6')	F6114
1500mm x 1830mm (5' x 6')	F6115
1650mm x 1830mm (5'4" x 6')	F61156
1800mm x 1830mm (6' x 6')	F6116

Waney Edge Panels



- Pressure treated softwood for long-life (not dipped)
- Fully framed
- More cost effective panel option
- Easy to install, suitable for timber or slotted concrete posts. Just add quick mix cement

Size	Code
900mm x 1830mm (3' x 6')	F6103
1200mm x 1830mm (4' x 6')	F6104
1500mm x 1830mm (5' x 6')	F6105
1650mm x 1830mm (5'4" x 6')	F61056
1800mm x 1830mm (6' x 6')	F6106

Hazel Wattle Hurdles

A product crafted with care and dedication from sustainable coppiced woodland.

The ideal protection for newly planted hedgerows or an instant naturally looking screen.



Approximate 3 to 6 year life expectancy for wattle hurdles, subject to location.

Sizes	Code
1200mm x 1800mm	F6124
1500mm x 1800mm	F6125
1800mm x 1800mm	F6126

Closeboard Gates

Our closeboard garden gate is a strong and durable option to protect your land. Made from responsibly sourced timber from well managed forests, this garden gate can be left or right side hung and adds a complementary finish to your closeboard fencing.



Sizes	Code
900mm x 1800mm	WG870
900mm x 1750mm Heavy Duty	WG878
1200mm x 1750mm Heavy Duty	WG879

Garden Fence Posts & Fittings

Panel Posts

- All sawn post sizes available on page 38-40



Size	Code
1800mm x 100mm x 100mm	F8110
2400mm x 100mm x 100mm	F8160
2700mm x 125mm x 100mm	F8173

Fence Post Panel Clips



Size	Code
50mm	A2725

Fence Post Bolt Down Anchor



Size	Code
75 x 75mm	A2715
100 x 100mm	A2720

Post Anchor Supports



Size	Code
750 x 50 x 50mm to drive	A2713
700 x 100 x 100mm to drive	A2710
600 x 75 x 75mm to drive	A2700

Closeboard Components

Arris Rail - Scarfed Ended



- Used as support rails for closeboard/feather edge fencing or timber palisade/pale fencing
- Manufactured from pressure treated softwood timber

Size (mm)	Code
2400mm x ex75mm x 75mm ended	F6262
3000mm x ex75mm x 75mm ended	F6265



Arris Rail - Plain Ended



- Triangular shaped horizontal rails to pin the feather edge boards to flat ends and can be attached to the posts using arris rail brackets
- Strengthens the system and enhances the style

Size (mm)	Code
3000mm x 75mm x 75mm plain ended	F6264



Did You Know?
We also sell Arris rail fixing brackets.



Counter Rail



- Counter rails are added to the top of the fence to provide support

Size (mm)	Code
2400mm x 50mm x 22mm	F6272
3000mm x 50mm x 22mm	F6273
3000mm x 50mm x 38mm	F6271



Bird Mouth Fencing



1.2m x 100 x 100mm Bird Mouth Post - F6290

3.0m x 100 x 100mm Rail - F8180



Angled Bird Mouth Strap - ET2248
Alternative post & rail sizes available





Bishops Hat Bird Mouth Strap ET2249

Palisade Fencing Timber & Gates

1800mm Wide Palisade Fence Panels

Complete with two rails and one loose pale.
Just add blank posts (75mm x 75mm or 100mm x 100mm)

Height	Round Top	Pointed Top
900mm	F6146	F6147
1200mm	F6148	F6149



Round Top Pales

Pales Only

Choose your post length to suit your pales, blank or morticed with weathered tops.
Choose nail on or morticed rails

Height	Round Top	Pointed Top
900mm	F6150	F6151
1050mm	F6153	F6154
1200mm	F6152	F6155
1500mm	F6156	F6157
1800mm	F6158	F6159



Pointed Top Pales

- **Timber palisade in panel form & pales only**
- **Easy to install in a range of sizes**

We recommend the following post and rails for nail on simple version

Sawn Post - 1800mm x 75x75mm - **F8100**

Sawn Post - 1800mm x 100x100mm - **F8110**

Sawn Rail - 3600mm x 38x88mm - **F6990 Supplied loose**

For morticed posts we recommend a scarf ended ex75mm x 75mm arris rail in 1.8,2.4m or 3.0m bay.









Wooden Palisade Gates

- Pressure treated softwood timber
- Responsibly sourced timber from well managed forests
- Available in pointed or round top
- Left or right hanging

Round Top Palisade Wooden Gate




Size (mm) (H x W)	Code
900mm x 900mm	WG804
1200mm x 900m	WG805
900mm x 1200mm	WG809
1200mm x 1200mm	WG808

Pointed Top Palisade Wooden Gate



Size (mm) (H x W)	Code
900mm x 900mm	WG802
1200mm x 900mm	WG803
900mm x 1200mm	WG806
1200mm x 1200mm	WG807

Feather Edge Garden Fence Panels

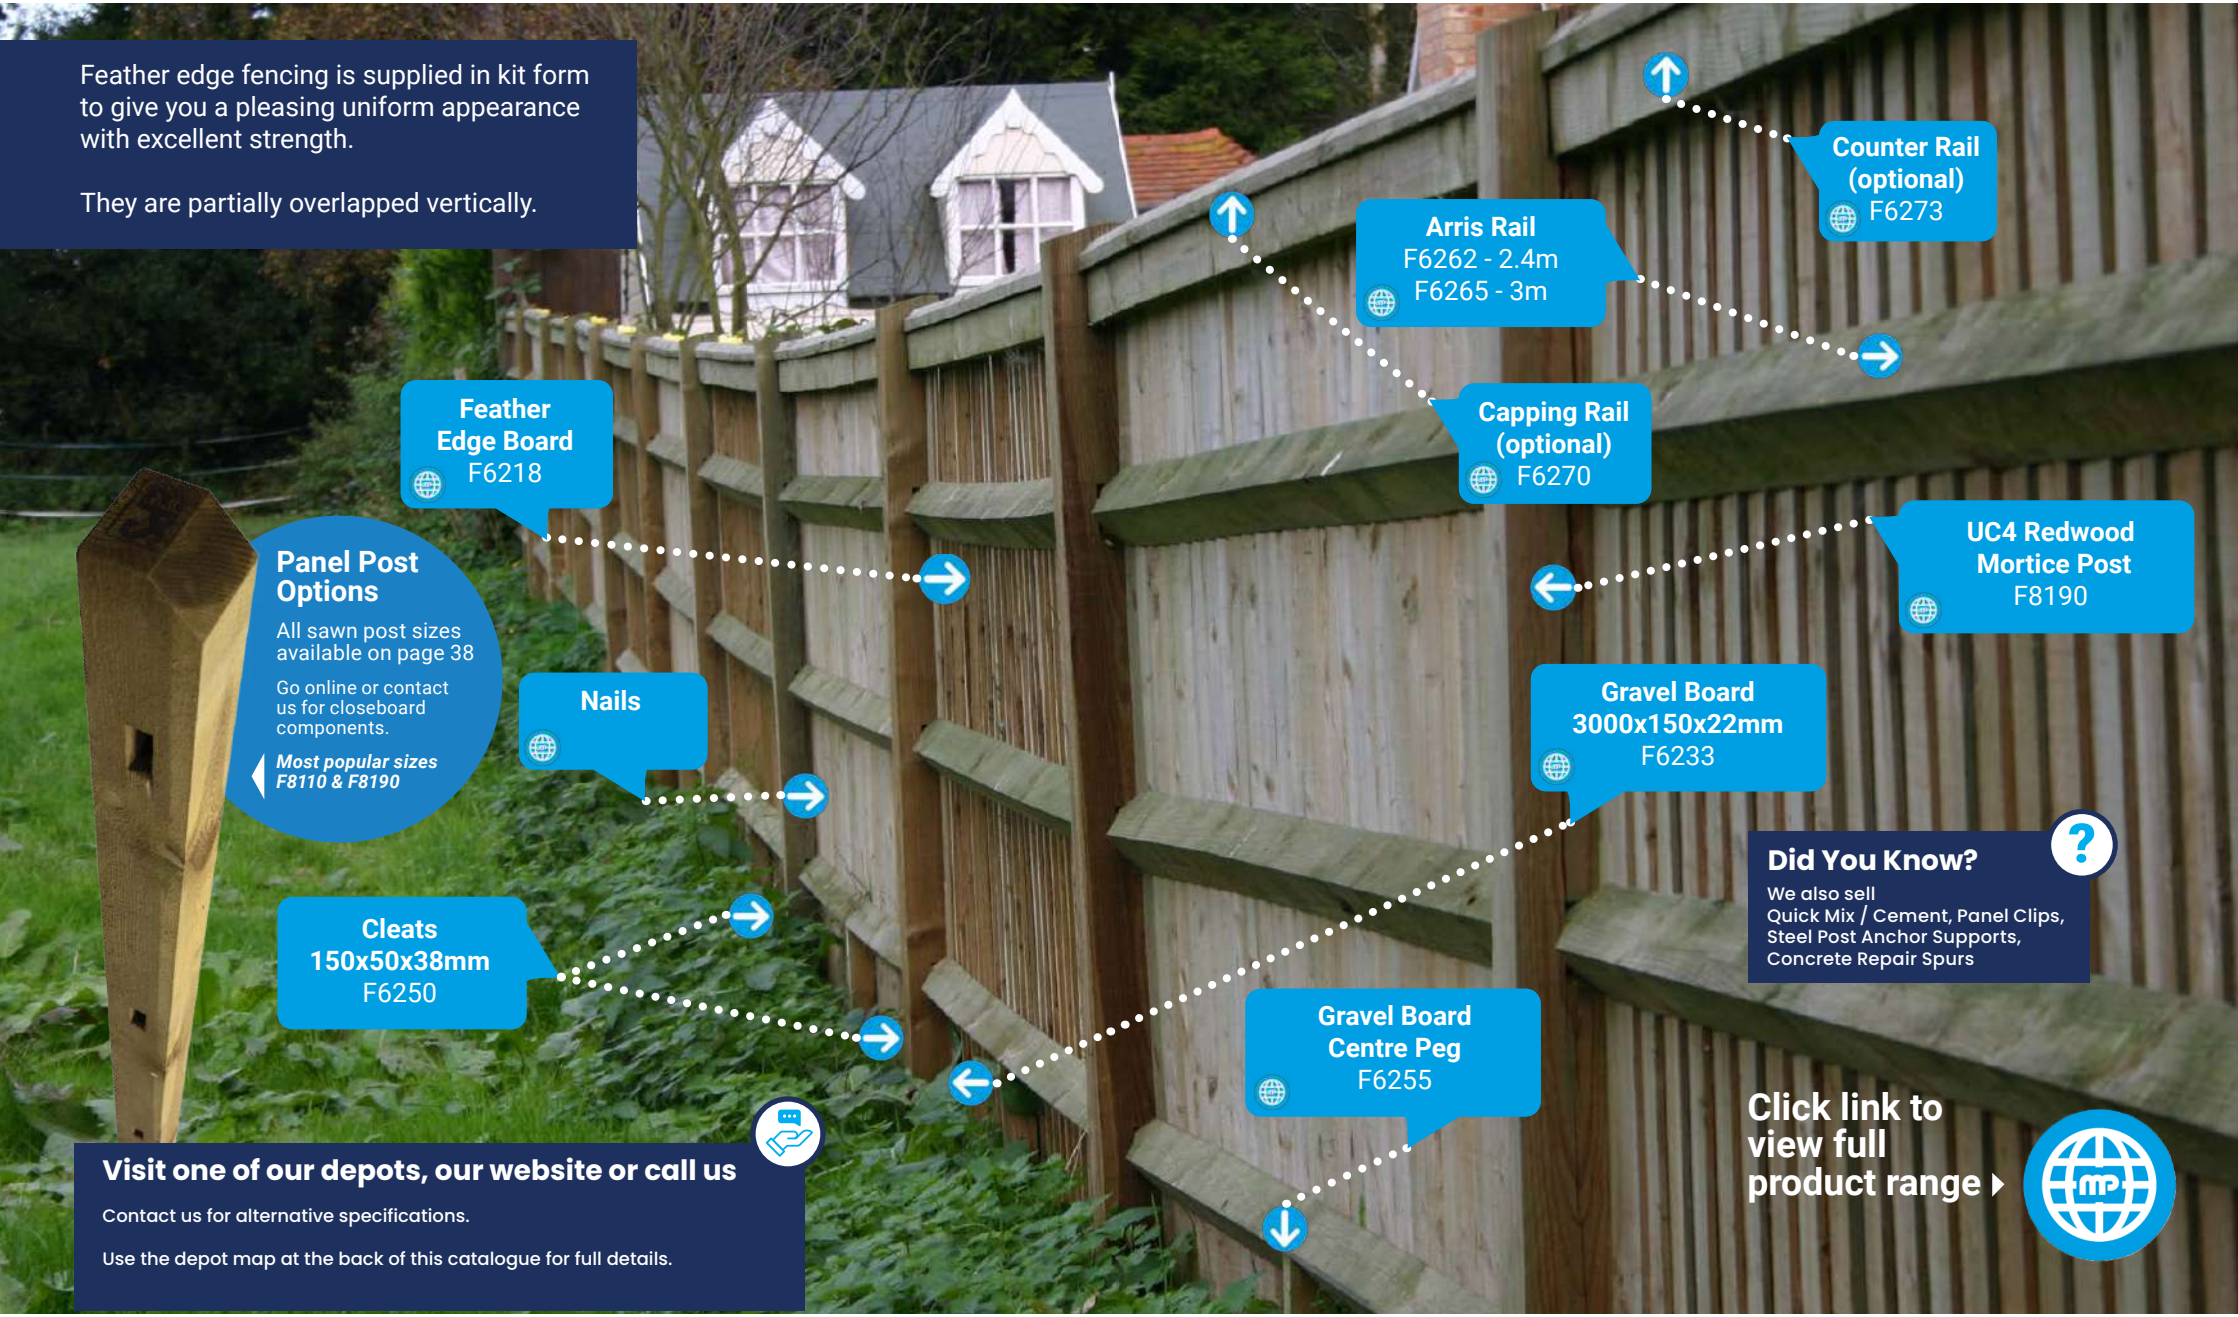

Concrete Posts & Gravel Boards

Concrete Slotted Posts



Description	Post Length	Fence Height	Code
Slotted END Concrete Post	2400 x 100 x 85mm	1.8m	CP1315
Slotted CORNER	2700 x 125 x 125mm	1.8m	CP1320
Slotted CORNER	1800 x 125 x 125mm	1.2m	CP1120
Slotted Concrete Post	3000 x 100 x 87mm	1.8m	CP1412
Slotted Concrete Post	2700 x 100 x 85mm	1.8m	CP1410
Slotted Concrete Post	2400 x 100 x 85mm	1.8m	CP1310
Slotted Concrete Post	2100 x 100 x 85mm	1.5m	CP1210
Slotted Concrete Post	1800 x 100 x 85mm	1.2m	CP1110
Slotted Concrete Post	1500 x 100 x 85mm	0.9m	CP1010



- Much stronger and longer lasting than wooden posts
- Ideal for our panel fencing range
- Available in different heights

Concrete Gravel Boards




- Used at ground level to protect the panels above from moisture in the ground.
- Longer lasting alternative to wooden gravel boards.

	Size	Code
	Concrete Gravel Board 1830 x 50 x 300mm	CL5045
	Concrete Gravel Board 1830 x 50 x 150mm	CL5049
*	Concrete Gravel Board 2885 x 50 x 150mm	CL5050
*	Concrete Gravel Board 3000 x 50 x 150mm	CL5051

*** Notched gravel board to be used in conjunction with morticed concrete post**

Concrete Repair Spur





- Quickly and simply repair damaged wooden fence posts with a concrete spur repair.

Size	Code
1065mm x 75mm x 75mm	CL5010
1215mm x 100mm x 100mm	CL5020

Cleats for Concrete Gravel Boards

Size	Code
Angle Cleat for Concrete Gravel Board 75 x 50 x 40mm x 6mm galvanised	F6256
Two Pin Gravel Board Cleat - Galvanised for concrete posts and morticed posts	F6257



DuraPost®

A lighter, stronger and easier to fit galvanised steel fence post in a range of four colours.

Available Post Colours

- Anthracite Grey
- Olive Grey
- Sepia Brown
- Galvanised Steel



For further details

DuraPost® Fencing Systems

Choose the DuraPost steel fencing system to avoid the pitfalls of concrete and timber.

DuraPost®



DuraPost® Gate Frame Kit

Make an entrance with our stylish DuraPost® Aluminium Adjustable Garden Gate Frame. We believe that a gate can do more than just provide access to and from your property.

It can also enhance the look of your outdoors, complement your home and become a key feature of your garden. Every project is different, which is why we've designed a gate to adjust to any outside space.

Colours Available

- Hinges: 2 x 165mm x 60mm
- Gate handle: 72mm narrow style back plate handle
- Lock: 72mm centre, 60mm back set lock.
- Corner bracket
- Steel Packer
- Plastic Packer
- Gate Hardware can be purchased alongside the gate frame.



DuraPost® PRIMA® Composite Board, 2.4m

The DuraPost PRIMA® 2.4m Composite Board protects the base of a fence from the ground or you can easily stack the boards on top of each other to achieve a composite fence panel. Use with the DuraPost® Fence Post in the same colour.

Colours Available

- 100% Recyclable: End-of-life recyclability ensures responsible disposal.
- Lightweight and Transport-Efficient: Significantly reduces carbon emissions during transportation.
- Durability: Its superior UV stability helps maintain its vibrant color, even in harsh outdoor conditions.
- Concrete Alternative: Minimise your carbon footprint – DuraPost® is a smarter, eco-friendly choice compared to traditional concrete solutions.



DuraPost® U Channel, 3.0m

The DuraPost® U Channels are made of galvanised steel with an option of a colour powder-coated finish. An alternative to using wood requires no maintenance and without the risk of warping, rotting and cracking.
The U Channels can be fixed to any side of the gate/corner post or used as a wall plate to start a continuous run of fencing.

Colours Available

- 100% Recyclable: End-of-life recyclability ensures responsible disposal.
- Lightweight and Transport-Efficient: Significantly reduces carbon emissions during transportation.
- Concrete Alternative: Minimise your carbon footprint – DuraPost® is a smarter, eco-friendly choice compared to traditional concrete solutions.



DuraPost® Z-Board 150mm, 2.4m

The DuraPost® 2.4m Z-Board is a cutting-edge gravel board, designed to be used with the DuraPost® classic fence post. Created with Glass Fibre Reinforced Polymer (GFRP) this gravel board is lighter than concrete or timber alternatives without compromising on strength.

Colours Available

- Guaranteed for up to 25 years
- Material: GFRP, Glass Fibre Reinforced Polymer giving extreme strength.
- Stain Resistant
- High UV and thermal resistance
- Maintenance-free



DuraPost® Post Cap With Bracket, 75 x 75mm

The Fence Post Cap with Bracket will give your posts a quality finish with colour matching post caps. Supplied with the relevant fixings to secure the cap to the fence post.

Colours Available

- DuraPost® accessories are 100% recyclable at the end of their long life.
- Lightweight and easy to transport, emissions and transport efforts are cut significantly.
- Less concrete in your landscape.




Gate Hardware can be purchased alongside the gate frame.

DuraPost® Aluminium Gate Hardware Kit

- 1 x Lock - 72mm centre, 60mm back set lock.
- 2 x 165mm x 60mm made from Grade 304 3mm stainless steel lift off hinge. With no visible fixings when closed and anti-theft orientation, they are safe and secure.
- 1 x 72mm narrow style back plate handle made from high-quality stainless steel. With a cylinder that can be keyed to your house key.
- 4 x Corner bracket - The corner brackets are an integral part of the DuraPost® Aluminum Gate, providing a rigid structure and a solid steel fixing point for the corners.
- 2 x Steel Packer - Steel core ensures that corners remain square and provides a very strong point for hinges to be fixed/hang.
- 4 x Plastic Packer - The steel packer and the plastic packer work together with the steel corner bracket to provide accurate fixing points.

Electric Fencing

Electric fence setups come in all shapes and sizes. This diagram illustrates the different parts needed for a semi - portable setup.

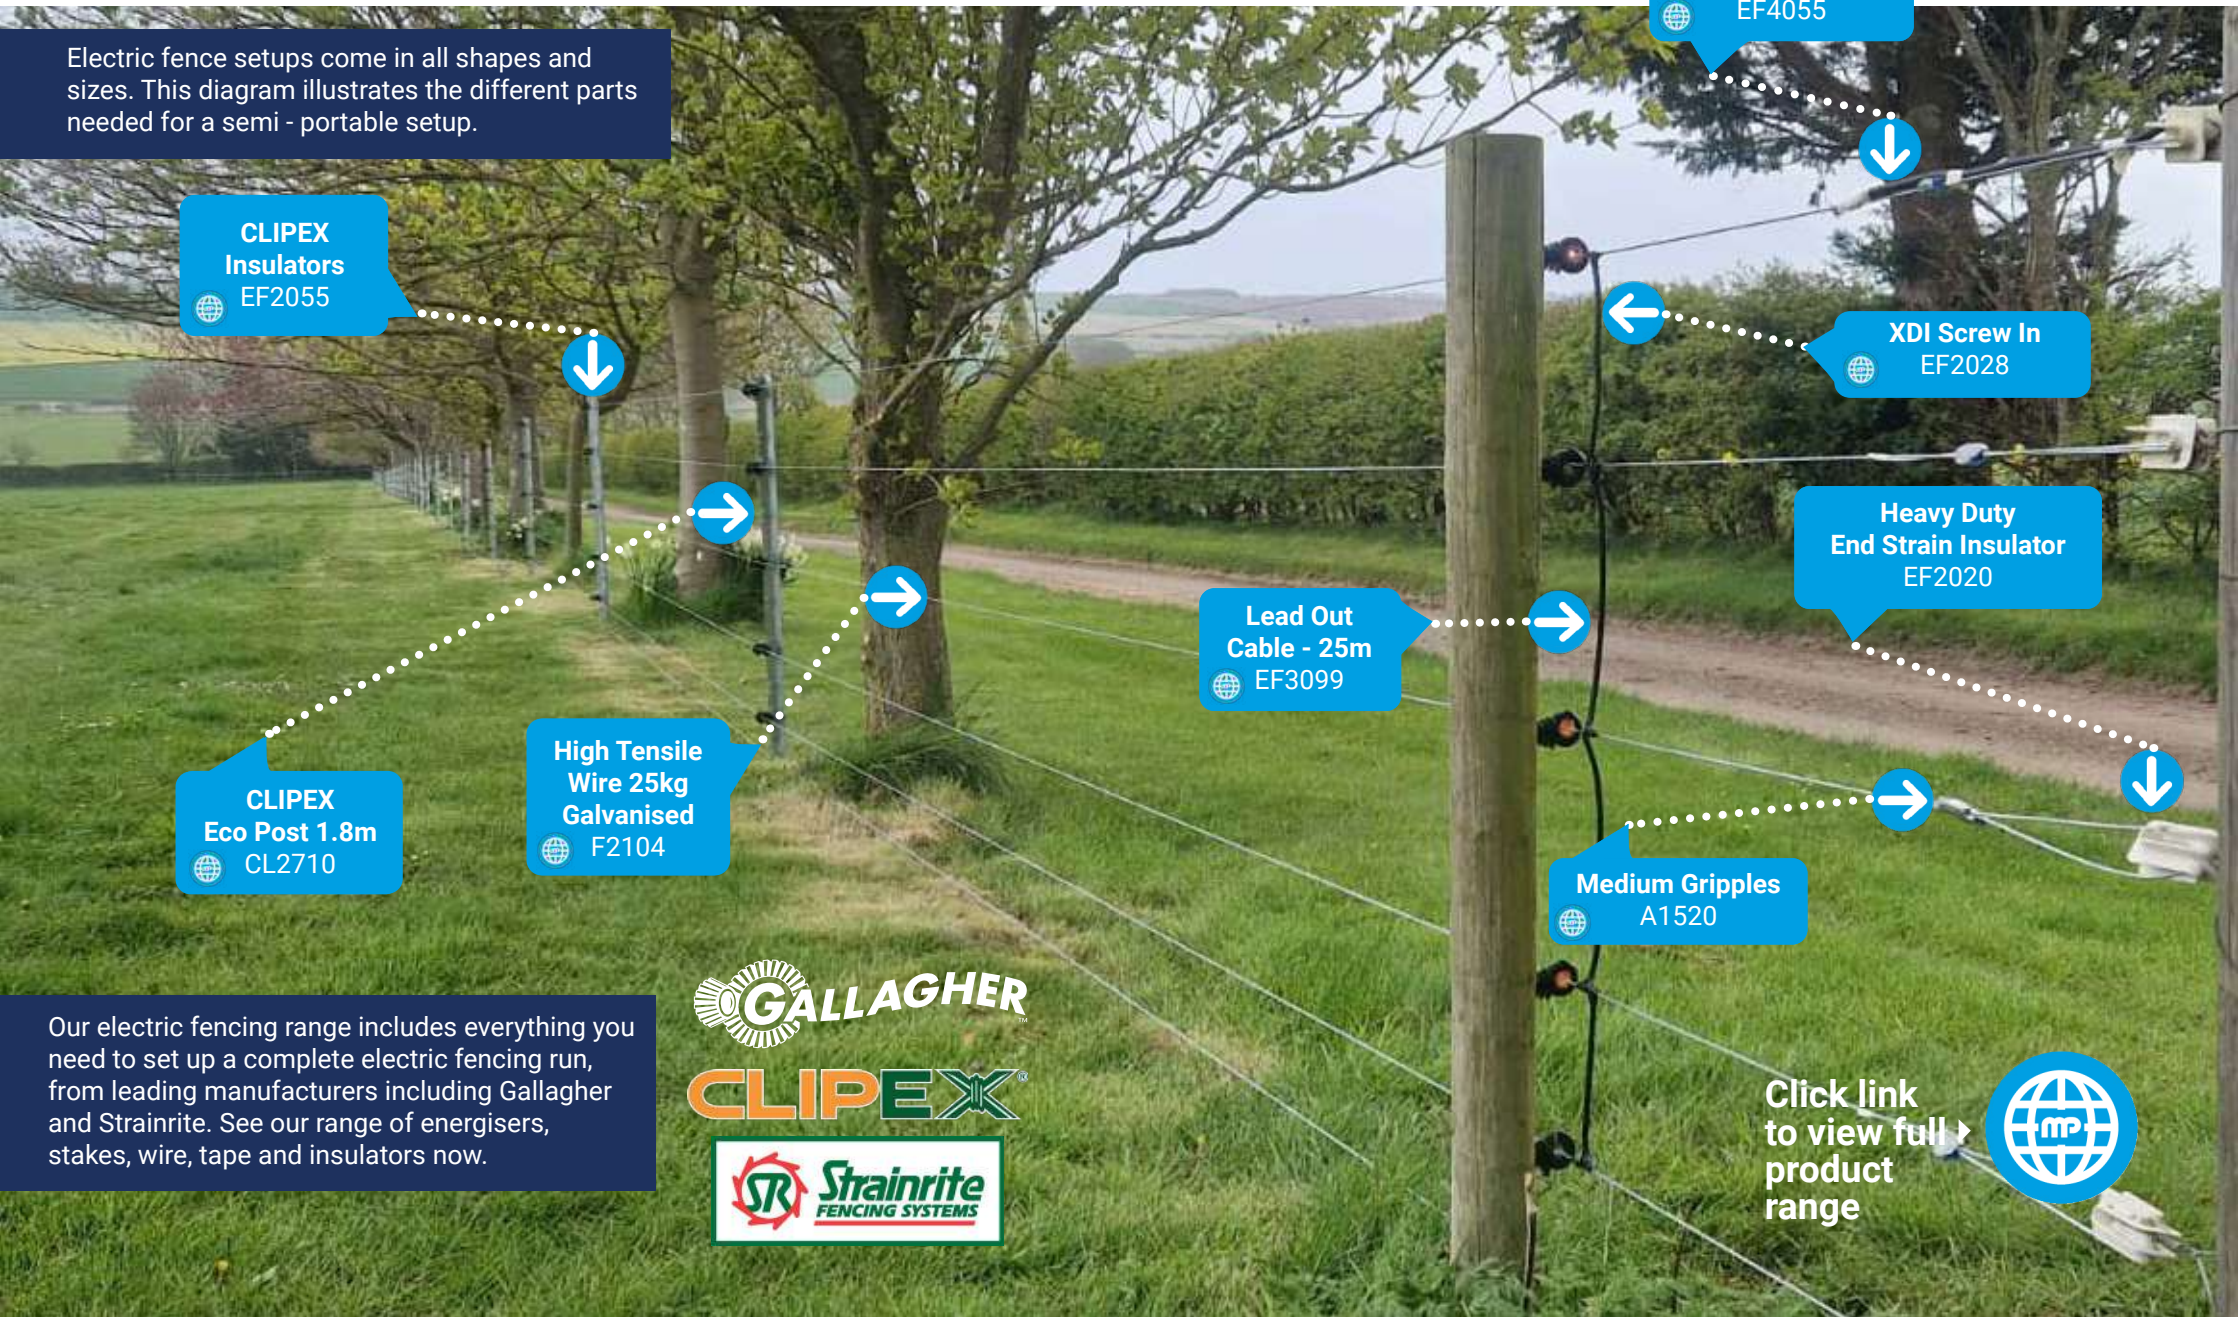

Our electric fencing range includes everything you need to set up a complete electric fencing run, from leading manufacturers including Gallagher and Strainrite. See our range of energisers, stakes, wire, tape and insulators now.

GALLAGHER
CLIPEX
Strainrite FENCING SYSTEMS

Click link to view full product range



- Approved supplier
- Largest quality electric fence brand
- First class products, fully user tested
- 7 year warranty on all energisers

subject to T&C's for 7 year guarantee

Electric Fence Fittings

GALLAGHER

Use the following electric fence fittings menu to find the parts you need.

1 Vandal Proof Box
2 M50 Mains Energiser
3 MB150 Battery Energiser
4 M550 Mains Energiser
5 S40 Solar Energiser
6 S20 Solar Energiser
7 Neontester
8 Fault Finder
9 Cut Off Switch
10 Electricity Warning Sign
11 Sheep Netting
12 Rabbit Netting
13 Poultry Netting
14 Spring Gate Set WHITE
15 Soft Touch Gate handle TERRA
16 Soft Touch Gate Handle (Tape) TERRA
17 Elastic Rope Gate Set WHITE
18 String Insulator Reinforced
19 Inline Wire Tensioner
20 Joint Clamp Bobbin
21 Gate Anchor 2 Way Screw In Insulator
22 Drill Chuck Pro
23 Tape Joiner 20mm
24 Offset Screw In Insulator

GALLAGHER



Have You Seen?

Weighing and EID Systems

McVeigh Parker are a main Gallagher stockist. Gallagher have more than 80 years of experience in the agricultural sector, they are at the forefront of new developments, especially in the field of weighing and EID solutions. We stock a complete range of equipment for weighing, data collection and stock management.

Click link ▲ find out more details.

25 W Insulator
26 CLIPEX Live Tip Offset Insulator
27 Screw In Ring Insulator
28 Gate Handle 3 Way Screw In Insulator
29 Heavy Duty End Strain Insulator
30 Wire Offset Insulator
31 Geared Reel Sets
32 Turboline BLUE
33 Vidoflex 6 Powerline WHITE
34 Powerline Tape 40mm WHITE
35 Underground Cable
36 Horse Post Stirrup
37 Pigtail Post
38 Plastic White Post

Electric Fence Fittings

Strainrite FENCING SYSTEMS

43 Activator Strap
44 Hi Test Insul Strainer
45 Premium Electric Bungy Cord: 100m
46 Joule Shield Wood Post Claw Insulator
47 Joule Shield Wood Post Pinlock Insulator

For more information contact your nearest branch

Strainrite® FENCING SYSTEMS

McVeigh Parker are proud to be European wholesalers and retailers of this quality range of products.

Click link to check out the range on our website.



Equestrian

Gallop into your equine projects with ease

From stable mats to storage bins and all material integral to building a riding arena, we pride ourselves on our industry knowledge, commitment and expertise.

EST. 1984 Galebreaker® AGRI

Centriforce



Riding Arenas

Our riding arena kit is designed to provide all you need to construct your own horse riding arena including rail fencing, retaining boards, softwood gates, spun and woven membrane, perforated land drainage to ensure adequate drainage for functionality in all weather and all the fittings required. All you will need to complete is your own choice of hardcore or toppings.

Equestrian Fencing

Equestrian fencing comes in many forms. We stock the ever popular traditional post and rail in various profiles. Half round, sawn, pressure treated, creosoted softwood, DURA² treated softwood or riven chestnut. Combine with X fence horse netting for added security. Available in a wide range of sizes to suit various budgets and requirements.





Stable Supplies

Our stable supplies include horse feeders and drinkers, stable mats and stable lining, wheelbarrows and grass protection mats. McVeigh Parker has been providing premium quality equestrian supplies since 1979 that have all been specifically selected by our equestrian experts.



Equine Electric

Electric fencing is used to protect paddocks and your post and rail. We supply PVC stud rail, Equifence hot line and our market leading X Fence horse netting. Combine any of these with UC4, DURA² or creosoted timber for a longer maintenance free life.

Bridle Gates

Browse our selection of horse gates which provide secure, easy access to equestrian paddocks or fields, along with our self-closing bridle gates perfect for bridle ways. We also supply horse friendly gate fittings perfect for both horse and rider, see pages 90-91.





Stokboard


stokbord® by Centriforce

Stokbord is a general purpose durable board, ideal for use with horses and other livestock thanks to its chew-proof non-toxic nature. Whether you are looking to create a lunging pen, line your stable or clad your horse-walker, Stokbord is multi-purpose & maintenance free.

Riding Arenas

If you are looking to install a commercial, private outdoor arena or lunge arena, we can offer you a comprehensive range of products from fencing, boards, gates, land drainage, membrane to full kits plus windbreak and wheelbarrows (*Just add your choice of topping and stone, not supplied by us*).

Full kits supplied at very competitive prices. We can offer various options to suit all budgets. For repair or DIY, individual components can be purchased separately.

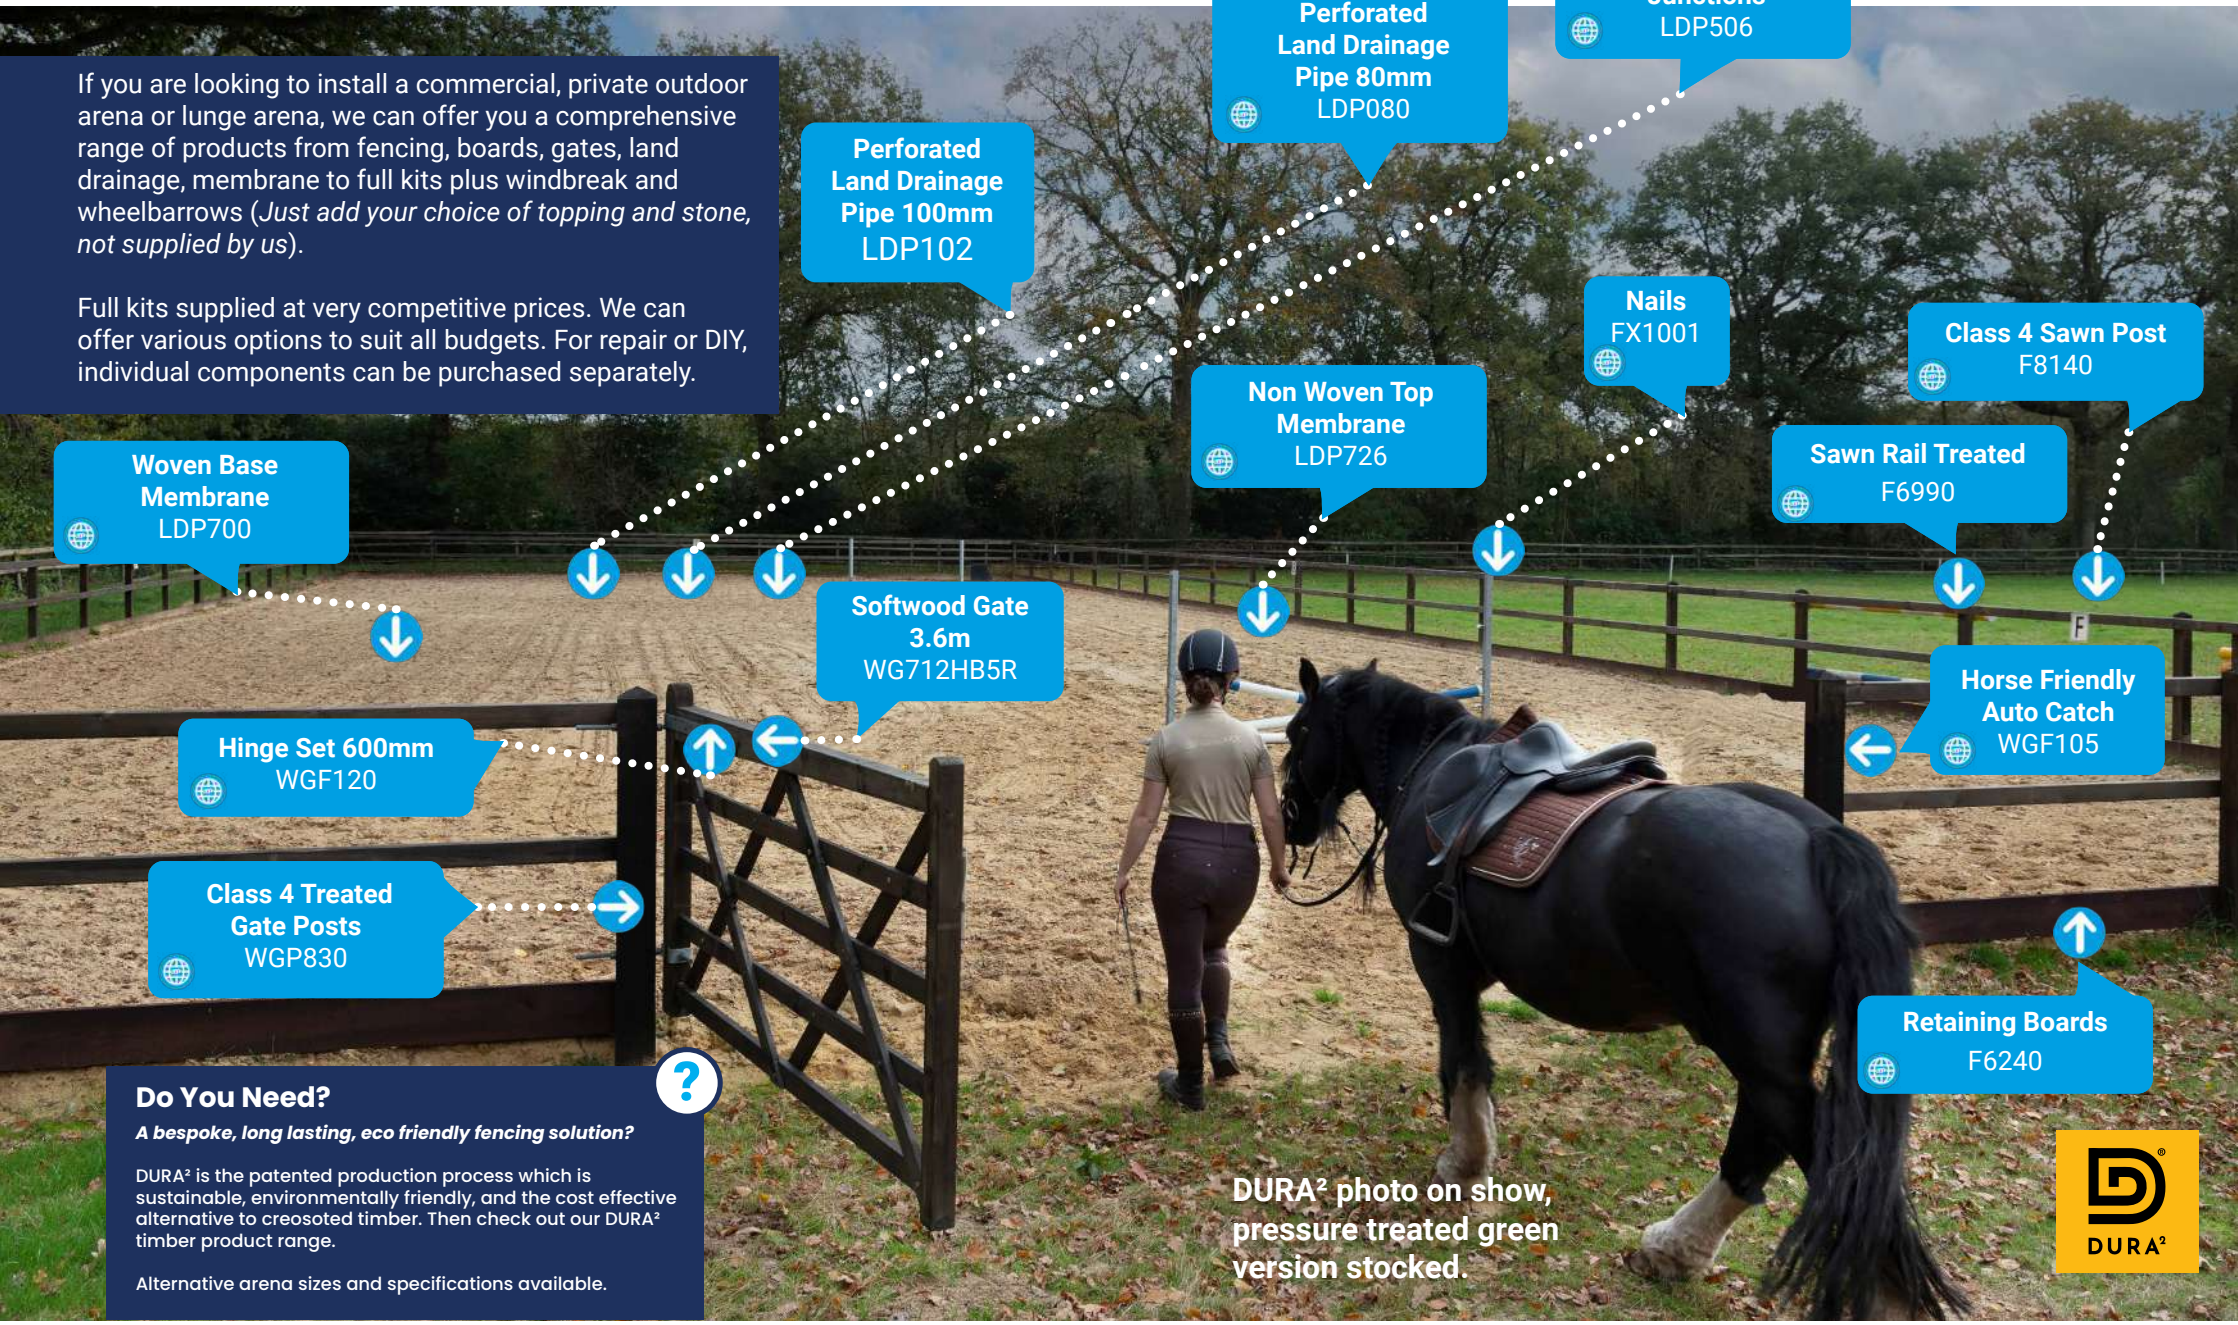

Do You Need?

A bespoke, long lasting, eco friendly fencing solution?

DURA² is the patented production process which is sustainable, environmentally friendly, and the cost effective alternative to creosoted timber. Then check out our DURA² timber product range.


Alternative arena sizes and specifications available.

DURA² photo on show, pressure treated green version stocked.

Equi Fence, Horse Rail & Stud Rail

TurboStar Equi Fence 250m

EF3031

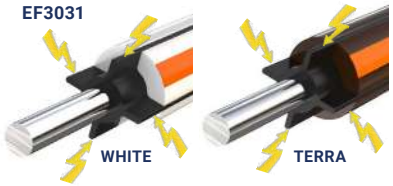


- The safest and most durable wire for horses with a 10 year guarantee
- Optimal conductive plastic cable with a 2.7 mm galvanised wire core
- No oxidation because of plastic/carbon covering
- Highly visible because of 7.5 mm diameter
- Available in terra and white
- 250m roll

Horse Rail

Horse rail is manufactured from high-quality medium density polyethylene that won't fade, splinter or shatter. Highly Conductive Carbon Compound strip can be electrified, encompasses 2 or 3 high tensile 2.5mm wires.

Available in brown, black and white



Hot-Top 2 line -
Top line can be electrified

Hot-Top 3 line -
Top line can be electrified

Hot-Top plus 3 line -
Top & bottom can be electrified

Stud Rail

Stud rail has long been used in the equestrian world as an alternative to timber post and rail fencing.

Once erected and strained up this type of fence requires minimal up-keep and looks good for years.

The rail is fixed to brackets on the posts that allow the fence to flex and slide under pressure reducing the risk of injury or damage to both horse and fence. It can easily be moved making it ideal for temporary paddocks or fencing. It is ideal as a top rail when used in conjunction with Equi-fence. Wide post spacings can also be maintained, providing a cost effective fence.





Colour	Width	Code	
B= Brown W= White 100m Roll	75mm	F2501 B	F2500 W
	100mm	F2503 B	F2502 W

Strainrite Mega Claw



EF2042

- Pack of 200
- Extended Jaws suitable for coated wire or poly rope.

Riding Arena Kits

Riding Arena Kit 40m x 20m

KRA





Installation Guide:
Check out spec sheet online

This new upgraded kit includes an improved heavier top layer spun membrane

- 66 x Retaining Boards 3.6m x 150mm x 38mm
- 99 x 3.6m x 38 x 87mm Sawn Rail Treated
- 66 x Class 4 2.1m x 75 x 125 Ptd Sawn Post
- 10 x 1kg bag R/Head Nail 100mm galv
- 2 x Perforated Land Drainage Pipe 80mm x 100m
- 1 x Perforated Land Drainage Pipe 100mm x 50m
- 10 x Land Drainage Y Junctions 100mm
- 3 x 100m x 4.5m Woven geotextile membrane black
- 3 x 4.5m x 100m fibre 140 membrane, standard
- 1 x 3.6m Softwood treated heavy bottom rail gate
- 1 x Horse friendly auto catch & striker
- 1 x Hinge Set 600mm Adj B/Hinge P/Pack Galv
- 2 x Class 4 2.4m x 175mm x 175mm Treated Post
- All pressure treated softwood for long life

Click link to view full equestrian product range

Optional upgrade extras available such as DURA² Other sizes available please contact us to discuss your requirements

Feed Storage

Feed Bins



Our high-quality feed bins are designed to provide a secure and convenient storage option for your feed supplies, ensuring they remain fresh and protected from pests and the elements. We offer two different sizes of feed bins to suit the needs of your livestock and the available storage space. This item comes flat packed for easy self build.

Capacity	Partition	Code
630L	1 (2 Sections)	TC6340
840L	2 (3 Sections)	TC6370

JFC Feed Storage Bin

JFCCMB05

Strong & durable feed storage bin with a low profile for ease of access when filling & emptying. The Easy Empty Cubic Metre Bin also tilts for easy access & has a smooth interior base without crevices for ease of emptying with a standard bucket.



Gorilla Tubs

- 2 sizes available
- Hard-wearing
- Non - porous
- Easy to clean
- Lightweight
- Kinder to the environment





Capacity	Description	Code
20L / 4.25Gal	Medium Skip (Black)	A4502
38L / 8.3Gal	Large (Blue)	A4503

Hay Feeders



JFC Haybell

JFCHB01

- Designed to fit over a standard round bale.
- Manufactured from robust polyethylene it has no metal components making it extremely safe for use with animals.
- Designed with 4 feeding ports it enables 4 horses to feed simultaneously.



Hay Soaker

JFCHS1

- Capacity: 300L
- Dimensions: 1200L x 600W x 800H
- Swivel Wheels: 1 for optimal maneuverability
- Drain Feature: DOF1 fitted for easy water drainage

Equine Feed Troughs



JFC Blue Door Mounted Feeder

JFCEQ10-1

- Equipped with 2 mounting holes on the back for secure attachment to a stable door
- Includes a 25mm drain-off plug for easier cleaning
- Designed with a feed retention lip on the rim to minimize wastage



JFC Wall Manger - Blue

JFCEQ1-1

- Three mounting holes on the back for secure attachment to a wall or post
- Includes a drain-off plug (DOF2) for easy cleaning
- Unique design with a feed retention lip to minimize waste
- Specifically designed for horses and ponies



JFC Circular Floor Feeder - Blue

JFCEQ3-1

- Made from tough, impact-resistant polyethylene
- Designed with an outer base rim to stabilize and prevent tipping
- Internal compartment can be filled with sand or water for added weight and stability
- Allows horses to feed in a natural grazing position, slowing feed consumption and reducing irritants
- Built to withstand aggressive horse play while ensuring horse safety



JFC Foal Creep Feeder - Green

JFCEQ5

- Adjustable stainless steel bars prevent adult animals from accessing the foals' feed
- Equipped with 2 mounting holes for secure attachment to a wall or post
- Includes a 13mm drain-off plug for easy cleaning
- Specifically designed for the care and management of foals
- Built to withstand aggressive horse play while ensuring horse safety

Stable Lining

Stokbord

Centriforce



Thickness	Sheet Size	Code
3mm	2440mm x 1220mm	F6002
6mm		F6000
9mm		F6005
12mm		F6010
18mm		F6012

- UK's leading sheet board brand
- 100% recycled plastic
- Maintenance free - never needs painting or treating

Stable Mats

Rubber Ring Mat

TH5105




These mats are light and easy to transport and install. Their anti-fatigue properties with the circular and square grid formation make them suitable for a wide variety of applications from equine establishments, walkways in parks and clubs, workshops, restaurants and playground safety.

- 1.5m x 1.0m x 23mm
- 25mm holes allow efficient drainage
- Resistant to all weather and extreme temperatures

Rubber Stable Mat

TH5100

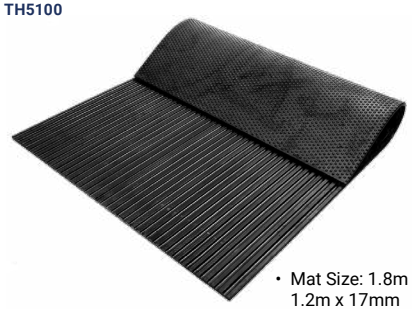

- Mat Size: 1.8m x 1.2m x 17mm


Stablemats provide a dust free, hygienic and easy to clean environment. They also save on bedding costs and reduce the time taken to muck out the stable.

The bubble top of the rubber stable mats offer a non slip surface, with the bottom grooved for easy drainage. Made from 100% non-absorbent rubber.

Warranty - Our stable mats come with a 24 month manufacturers quality assurance warranty* which covers any manufacturing failure or defects.
* Terms & Conditions apply

Windbreak Netting





General Purpose Windbreak Netting
Available in black or green.
This windbreak provides an effective protection for plants, shrubs and livestock.
Mesh Pattern: 15x4mm

Height	Length	Colour	Code
1m	30m	Green	NET110

Reinforced edges for a stronger longer lasting windbreak

Colebreaker Agri



Bay screens



Roller screens



Agridoor

Bay screens

- Suitable for permanent fixing of infrequent access
- Quick to install and remove
- Offers weather protection but allows ventilation
- Flame retardant
- Tear and fray resistant material
- Rot proof
- Designed to clip onto bays or wider spans up to 20m





Roller screens

- Designed for regular access
- Rapid opening mechanism
- Offers weather protection and variable ventilation
- Fully adjustable to fit opening
- Complies with EC door directive EN-13241
- Heavy duty spring allows fast access with a locking mechanism to stabilise against wind pressure

Agridoor

- Fully adjustable to fit
- High speed chain drive
- Steel wind bars
- Replacement panels
- Complies with EC door directive EN-13241
- Ideally suited to grain stores and bulk feed stores
- Suitable for installing on the inside or outside of buildings



Call us today for more information and to book your FREE site consultation

Trailers & Wheelbarrows

Our equestrian wheelbarrows are the perfect choice for use in the yard perfect for mucking out or transporting feed.

Our wheelbarrows are packed with a host of special features such as tipping functionality, puncture-proof wheels (option) and pneumatic wheels to deliver superior manoeuvrability and smooth handling to help you get the job done quicker.

JFC Tip Assist Trailer

JFCATV500TA



- Gas strut to assist with load tipping.
- Metal support frame capable of handling heavy loads up to 500kg.
- Robust polyethylene body mounted on a galvanized metal frame.
- Equipped with a lever ball hitch.
- Protective steel plate on the front lip to prevent damage from impacts.
- Strong hinge point for effective load tipping.
- Two roller bearing 4-ply pneumatic wheels.

Tipping Wheelbarrow 250 litre capacity

JFCTWB5





- Twin wheeled with bearings
- Hot dip galvanised chassis
- Heavy duty moulded plastic pan

Tipping Trailer - 250 & 500 litre capacity

JFCTL





- Ideal for large gardens & estates
- Great for golf courses & parks
- Tows easily behind an ATV
- x2 sizes

Twin Wheelbarrow - 250 litre capacity

JFCTWBG



- 1800 x 865 x 720mm
- Galvanised frame and polyethylene body ensures a long-life span.
- Replacement wheels and handle grips available.
- Twin puncture proof tyres

JFC ATV Fertiliser Spreader (Manual Control)

JFCATVS500M



- Suitable for operation on sloping and mountainous terrain due to its low centre of gravity and wide wheelbase
- Large hopper capable of transporting and spreading up to 500kg of most fertiliser types.
- The spreader has a 12m spreading width running at 15km/hr



Gates

Our wooden gates, hand crafted in the UK

We stock thousands of gates to suit all purposes, domestic, commercial, industrial and agricultural. Deer gates, farm gates, metal and wooden gates through to ROW gates. We also stock heavy-duty fittings to work across our whole range.

Our gates are all high quality and provide a good level of security. We even offer made-to-measure bespoke garden gates and cattle-gates, so you can ensure the perfect fit every time.

HOPKINS CATTLE GRIDS

BLAMPHAYNE SAWMILLS LTD



Gate Posts

Choosing the right gate post is crucial to ensure the longevity of your gate. Our range includes a selection of posts to ensure stability of your gate.



Right Of Way Gates

Our range of ROW gates includes a variety of options allowing entry for pedestrians, dogs, wheelchair and mobility vehicle users whilst ensuring your livestock stay secure.

Metal Farm Gates

From field to farm, from stable to yard we have a metal gate to suit various applications. We have a made to measure service for livestock systems and bespoke projects.



Wooden Gates

Our wooden entrance gates are suitable for domestic and commercial use. Popular products include our Universal and Yeoman Curved gate which are both available in hard-wood and softwood options. We stock a wide range of gates in a wide range of sizes online and in depot.





Gate Fittings

We stock a comprehensive range of heavy duty gate fittings to suit metal and wooden gates, whether you are installing a smaller entrance gate or a large metal field gate. We have a closing or hanging fitting to suit.



Bespoke Gateway Products

Our bespoke gate range includes a selection of cattle grids; ideal for providing vehicle access to land whilst preventing the (escape) free movement of cattle and other roaming livestock. For any other bespoke projects contact us.

Metal Field Gates

We have a wide selection of metal field gates available in a variety of styles and sizes to suit. Available singularly, in pairs and with a choice of fastenings.

Ashbourne 7 Rail Metal Field Gate









- Available in 14 widths: 915mm (3ft) to 4880mm (16ft)
- All sizes stand at 1143mm high
- Both D Loop or Spring bolt locking styles available

Fitted with sleeved gate eyes.
Hole punched bracing c/w gate eyes

- Metal Gates Ashbourne 7 Rail
- High quality field gates with box section ends.
- Exceptional strength means it is suitable for most livestock including horses
- Hot dip galvanised to BS EN ISO 1461 for exceptional corrosion resistance
- Classic design seen right across the country

Width (mm)	Locking Style	Code
915mm	Springbolt	GAB03S
1220mm	Springbolt	GAB04S
1525mm	Springbolt	GAB05S
1830mm	Springbolt	GAB06S
2135mm	Springbolt	GAB07S
2440mm	Springbolt	GAB08S
2745mm	Springbolt	GAB09S
3050mm	D Loop	GAB10D

Width (mm)	Locking Style	Code
3355mm	Springbolt	GAB11S
3660mm	Springbolt	GAB12S
3965mm	Springbolt	GAB13S
4270mm	Springbolt	GAB14S
4575mm	D Loop	GAB15D
4575mm	Springbolt	GAB15S
4880mm	Springbolt	GAB16S

Metal Gate Locking Styles



Spring Bolt



D Loop


Did You Know?

For added security on your gate hinge you can add an anti-theft collar.



Did You Know?

We also sell metal gate fittings on p102.



Ashbourne 7 Rail Metal Field Gate Pairs

A Quality Pair Of Seven-Rail Hot Dip Galvanised Field Gates

- The top rail is supplied pre-drilled before manufacture for a padlockable throw over.
- Supplied with heavy duty padlockable drop over.
- Fully welded prefixed drop bolt on one half

- The top rail is supplied pre-drilled before manufacture for a padlockable throw over.
- Supplied with heavy duty padlockable drop over.
- Fully welded prefixed drop bolt on one half



Width	Gate Style	Locking Style	Code
1830mm	Ashbourne Gate Pair	Heavy duty throw over frame & D Bolt Galvanised	GABPR06
2135mm			GABPR07
2440mm			GABPR08
2745mm			GABPR09
3050mm			GABPR10
3355mm			GABPR11
3660mm			GABPR12
3965mm			GABPR13
4270mm			GABPR14
4575mm			GABPR15
4880mm			GABPR16

7 Rail & 5 Rail Metal Half Meshed Field Gates



5 rail half meshed metal field gate

Width	Locking Style	Code
915mm	Spring Bolt	GHM03S
1220mm	Spring Bolt	GHM04S
1525mm	Spring Bolt	GHM05S
1830mm	Spring Bolt	GHM06S
2130mm	Spring Bolt	GHM07S
2440mm	Spring Bolt	GHM08S
2745mm	Spring Bolt	GHM09S

Width	Locking Style	Code
3050mm	Spring Bolt	GHM10S
	D Loop *	GAB10D
3355mm	Spring Bolt	GHM11S
3660mm	Spring Bolt	GHM12S
	D Loop *	GAB12D
3965mm	Spring Bolt	GHM13S
4270mm	Spring Bolt	GHM14S
4575mm	Spring Bolt	GHM15S
	D Loop *	GAB15D
4880mm	Spring Bolt	GHM16S


Metal 5 Rail Cattle Yard Gates

The 5 rail Cattle Yard gate is a strong gate suitable for use in open dairy cattle yards. For added security it is fitted with a keyhole/pendulum sliding bolt as standard. This gate is 1143mm high and is available in a selection of widths.

GW12S



- Keyhole/pendulum sliding bolt as standard (for added security)
- Sleeved 50 x 50mm box section hanging stile
- 50mm x 50mm SHS latch end
- Top and bottom rails are 48.3mm o/d CHS
- Intermediates rails 44.5mm o/d. CHS
- 1143mm high. Designed to hang at 1.2m



Fitted with a Pendulum slide bolt lock

Gate Width Options		
915mm	2745mm	4270mm
1220mm	3050mm	4575mm
1525mm	3355mm	4880mm
1830mm	3660mm	
2440mm	3965mm	

Metal Sheeted Yard Gates SYG



Fitted with a Pendulum slide bolt lock

- Two rail options
- 3 rail - Moorland sheeted gate
- 4 rail - Buxton sheeted gate (heavy duty)
- Suitable for livestock and machinery containment
- Made from 40mm and 50mm box section
- Fitted with one sided pre-galv. steel sheet
- Gates ideal for exposed positions

Metal Gate Posts

We have a range of metal gate posts suitable for hanging various gate fittings including hanging posts, slotted latch posts, auto catch posts and dual latch posts. All of our metal gate posts are made of quality steel and are designed to be strong and durable, suitable for agricultural and commercial use.

Standard Slotted Posts



- Hot dip galvanised
- Fully welded tops

Size	Code
88.9mm x 2000mm	GPS1G
114.3mm x 2000mm	GPS2G
100mm x 100mm x 2000m	GPS4G


Dual Slotted Post

Size	Code
114.3mm x 2000mm @ 90˚	GPSD290
114.3mm x 2000mm @ 180˚	GPSD2180



Ground Sockets



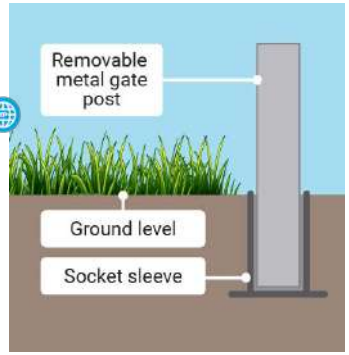

- Hot dip galvanised
- 610mm long
- 3.0mm thick

Size	Code
88.9mm dia.	GPSKT1
114.3mm dia.	GPSKT2
100mm x 100mm	GPSKT4

Auto Catch Posts





- Suitable for an Ashbourne D Loop

Size	Code
88.9mm x 2000mm	GPA1G
114.3mm x 2000mm	GPA2G

Standard Hanging Posts




- Hot dip galvanised
- Fully welded hinges
- Fully welded tops
- 2 hinge styles available
- Spacings to suit Ashbourne field gates

Size	Code
88.9mm x 2000mm	GPH1G
" Inverted top hinge	GPH1RPG
114.3mm x 2000mm	GPH2G
" Inverted top hinge	GPH2RPG
114.3mm x 2286mm	GPH276
100mm x 100mm x 2000mm	GPH4G



Lagoon Security Gates

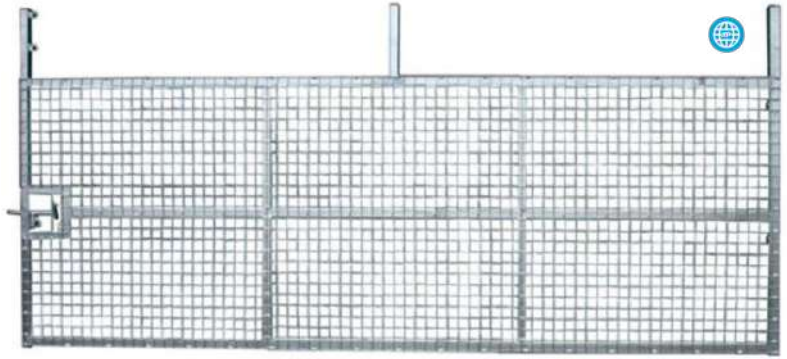

The Lagoon Gate is a 3 railed gate clad with 50 x 50 x 4mm welded mesh with extensions for barbed wire. It is 1270mm (4'1") high and supplied with a padlockable sliding bolt. It is hot dipped galvanised to ensure a maintenance free life.

- 3 railed gate clad with welded mesh with extensions for barbed wire
- Available in a variety of sizes
- A made to order item

Deer Gates & Posts

Ideal for deer fencing and deer enclosures, the deer gates we have to offer are the very best choice for reliability and strength. Our deer gates provide you with a secure entry and exit point to your deer fencing without weakening the enclosure.

All of our metal deer gates are fully meshed and have universal hanging with a central sliding bolt and with the option of metal or wooden posts depending on preference.

Wooden Deer Gates



- Made to measure
- Features morticed joints for added strength & optional heavy bottom rail for extra rigidity
- Available in lengths up to 3600mm

Fully Meshed Deer Gates




- Suitable for containing or excluding deer
- 1860mm high, 75mm mesh cladding and lockable sliding bolt
- Fully galvanised to BS EN ISO 1461
- It is available in lengths from 0.6m (1'9") – 4.88m (16'0")
- Can be hung as pairs

Deer Post Options


Hanging Deer Posts

- Hot dip galvanised after manufacture to BS EN ISO 1461
- Anti-theft collar can be added for additional security. **WGF005**





An inverted top hinge to prevent easy gate removal



A pre-drilled 16mm hole at foot of post to add re-bar strength
(re-bar can be supplied as extra)



Double slotted latch posts, with a long oval shape slot, allowing for any drop in gate


Slotted Deer Latch Posts

- 2590mm (7'6") x 114mm (4.5") dia round x 3.0mm gauge slotted post
- Available in dual 180 slot (made to order) to allow central latching for larger pairs
- Hot dip galvanised after manufacture to BS EN ISO 1461

Post	Dimensions	Details	Code
Slotted deer post	2.59m x 114mm	Slotted latch post	GPSDG2G
Hanging deer post	3.05m x 114mm	c/w 16mm base hole for re-bar reinforcement	GPHDG2G
Wooden deer gate post	3m x 175mm x 175mm		WGP383

Did You Know?
We also sell metal field gates on p80.



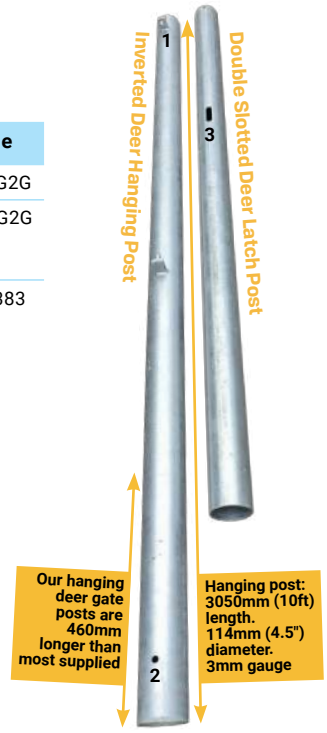

Wooden Gates

McVeigh Parker stock hundreds of wooden gates across our eight nationwide depots available in a range of styles and sizes.

Yeoman Gates



Softwood Option
- Tanalith E pressure treated for long service life
- Available in left or right hanging in a wide range of widths
- Galvanised fittings


Hardwood Option
- Iroko the premier hardwood – teak qualities mean low maintenance
- Full range of fittings and posts available to suit all the options available

Heavy bottom rail versions also available

Click link to view full product range

Width	Height	Pattern	Code
900m	1.2m		**Softwood:** Left: **WG503L** Right: **WG503R** **Hardwood:** Left: **WG403L** Right: **WG403R**
1.20m	1.2m		**Softwood:** Left: **WG504L** Right: **WG504R** **Hardwood:** Left: **WG404L** Right: **WG404R**
1.50m	1.2m		**Softwood:** Left: **WG505L** Right: **WG505R** **Hardwood:** Left: **WG405L** Right: **WG405R**
1.80m	1.2m		**Softwood:** Left: **WG506L** Right: **WG506R** **Hardwood:** Left: **WG406L** Right: **WG406R**
2.10m	1.2m		**Softwood:** Left: **WG507L** Right: **WG507R** **Hardwood:** Left: **WG407L** Right: **WG407R**
2.40m	1.2m		**Softwood:** Left: **WG508L** Right: **WG508R** **Hardwood**: Left: **WG408L** Right: **WG408R**
2.70m	1.2m		Softwood: Left: **WG509L** Right: **WG509R** Hardwood: Left: **WG409L** Right: **WG409R**

Wooden Gate Build Essentials

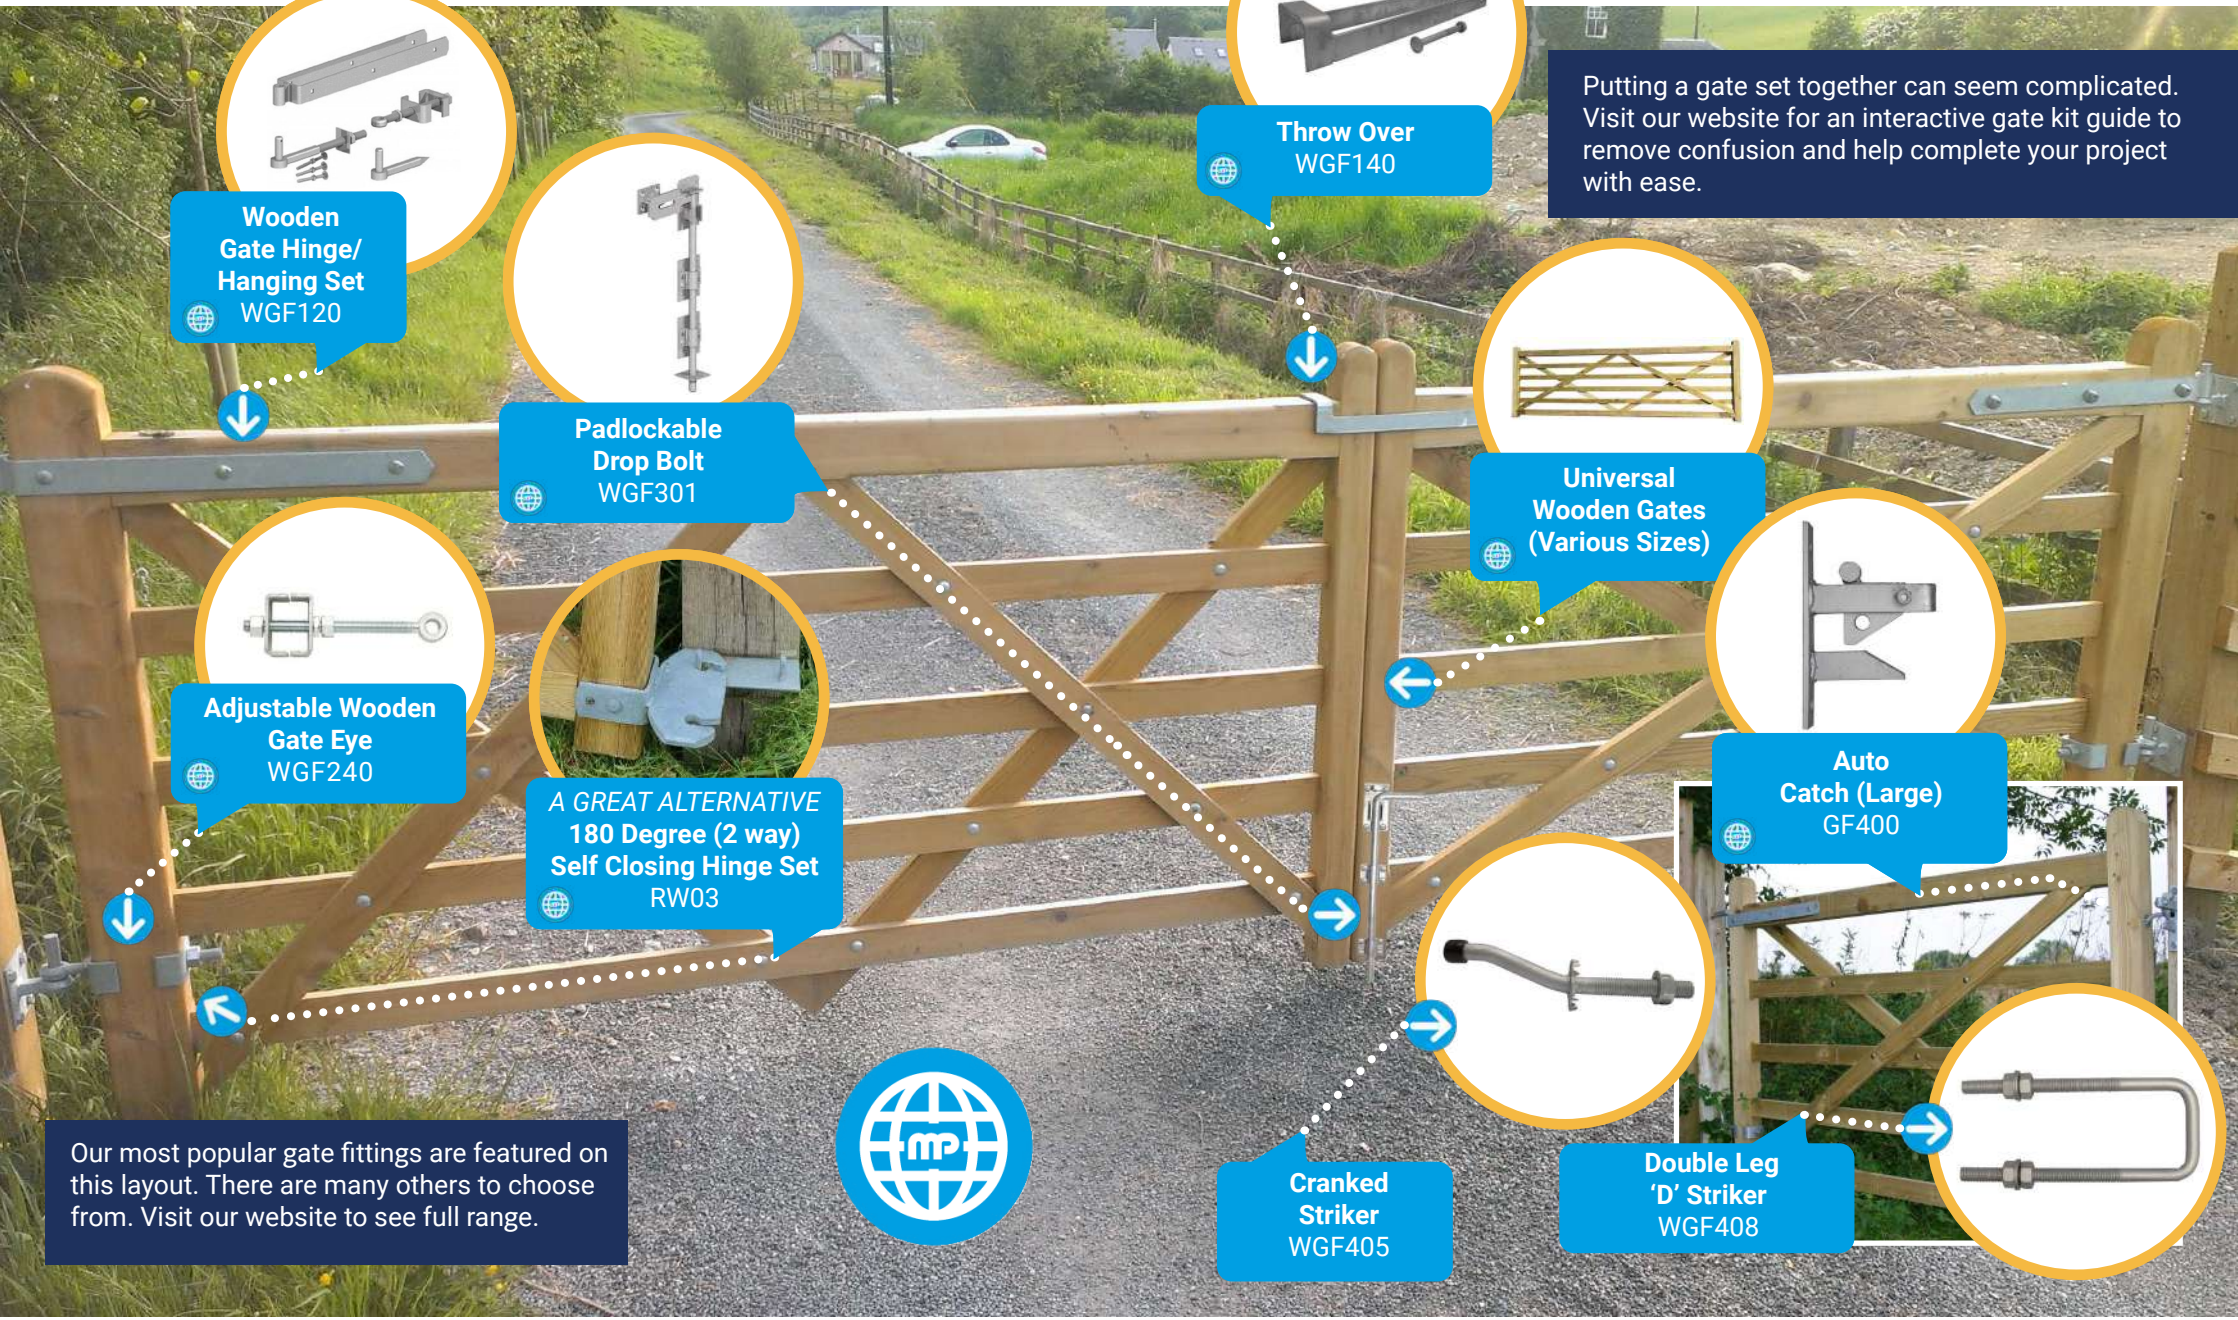

Putting a gate set together can seem complicated. Visit our website for an interactive gate kit guide to remove confusion and help complete your project with ease.

Wooden Gate Hinge/ Hanging Set
WGF120

Throw Over
WGF140

Padlockable Drop Bolt
WGF301

Universal Wooden Gates (Various Sizes)

Adjustable Wooden Gate Eye
WGF240

A GREAT ALTERNATIVE
180 Degree (2 way) Self Closing Hinge Set
RW03

Auto Catch (Large)
GF400

Cranked Striker
WGF405

Double Leg 'D' Striker
WGF408

Our most popular gate fittings are featured on this layout. There are many others to choose from. Visit our website to see full range.

Universal Five Rail Gates



Heavy Bottom Rail - now as standard

BLAMPHAYNE SAWMILLS LTD

All gates featured have a height of 1200mm

Width	Pattern	Code
915mm (3ft)		Softwood: **WG703HB5R**
1220mm (4ft)		Softwood: **WG704HB5R**
1525mm (5ft)		Softwood: **WG705HB5R**
1830mm (6ft)		Softwood: **WG706HB5R**
2135mm (7ft)		Softwood: **WG707HB5R**
2440mm (8ft)		Softwood: **WG708HB5R**
2745mm (9ft)		Softwood: **WG709HB5R**
3050mm (10ft)		Softwood: **WG710HB5R**
3355mm (11ft)		Softwood: **WG711HB5R**
3660mm (12ft)		Softwood: **WG712HB5R**
3965mm (13ft)		Softwood: **WG713HB5R**
4270mm (14ft)		Softwood: **WG714HB5R**
4575mm (15ft)		Softwood: **WG715HB5R**

Softwood Option
- Made from kiln dried Scandinavian Redwood
- Tanalith E pressure treated for long service life
- Full width heavy top rail for added strength
- Galvanised fittings

Hardwood option (made to order)
- Iroko the premier hardwood – teak like qualities mean low maintenance
- Full range of fittings and posts available to suit all the options available
- Gates can be hung as single leaf or as a pair
- Universal Gate – Distinctive traditional double cross braced high quality 5 bar drive or field gate.

Click link to view full product range

Please note, all wooden gates are in imperial lengths

Universal Six Rail Gates

- Heavy bottom rail options stocked
- Heavy bottom rail to suit electric gate installations
- 6 rail option to suit those with dogs / sheep
- Hardwood timber option available in all designs

Available in 10 widths, starting at 0.90m up to 3.60m


Features
- Heavy solid top rail ex90mm x 70mm PAR for the entire width of the gate for added strength.
- The popular diamond braced design also gives added strength to the gate
- Morticed rails and cross bracing ex70mm x 20mm are all held together with zinc coated nuts and bolts
- Stiles are 95mm x 70mm both with rounded tops
- Heavy bottom rail 70mm x 70mm planed finish
- Height to top of hanging stile is 1.2m (47”). Standard sizes range from 0.9m (3”) to 4.57m (15”)
- Full range of fittings and posts to suit various options stocked



Heavy Bottom Rail - now as standard

Hardwood option available on request

5 & 6 Heavy Bottom Rail Gate Rail Spacings

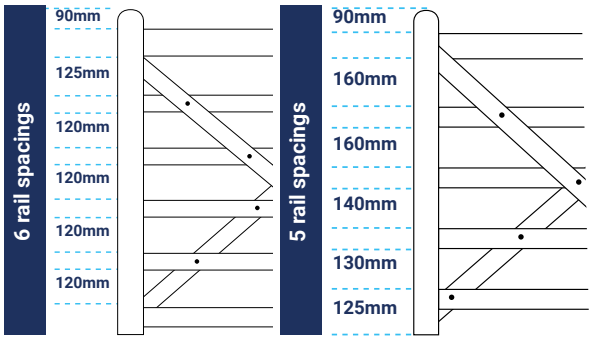



6 Rail, Heavy Bottom Rail Gate

Heavy Bottom Rail Gate Benefits



ADDED STRENGTH | **ADDED SECURITY** | **SUITABLE FOR ELECTRIC MOTORS (Automatic Gates)** | **UNIVERSAL HANGING GATE FITTINGS**



Heavy Bottom Gate c/w gate post set & fittings


Width	Pattern	Code
915mm		**WG703HBR**
1220mm		**WG704HBR**
1525mm		**WG705HBR**
1830mm		**WG706HBR**
2135mm		**WG707HBR**
2440mm		**WG708HBR**
2745mm		**WG709HBR**
3050mm		**WG710HBR**
3355mm		**WG711HBR**
3660mm		**WG712HBR**

All gates featured have a height of 1220mm

Heavy Bottom Rail Gate Essentials

The essentials needed for refurbing or upgrading your wooden gate setup, using the stronger and now standard heavy bottom rail gate.

To give you a bigger and better idea of our heavy bottom gate range, we've included closeup photography of the key joints throughout, that go to give this style of gate its weight, strength and long service life.

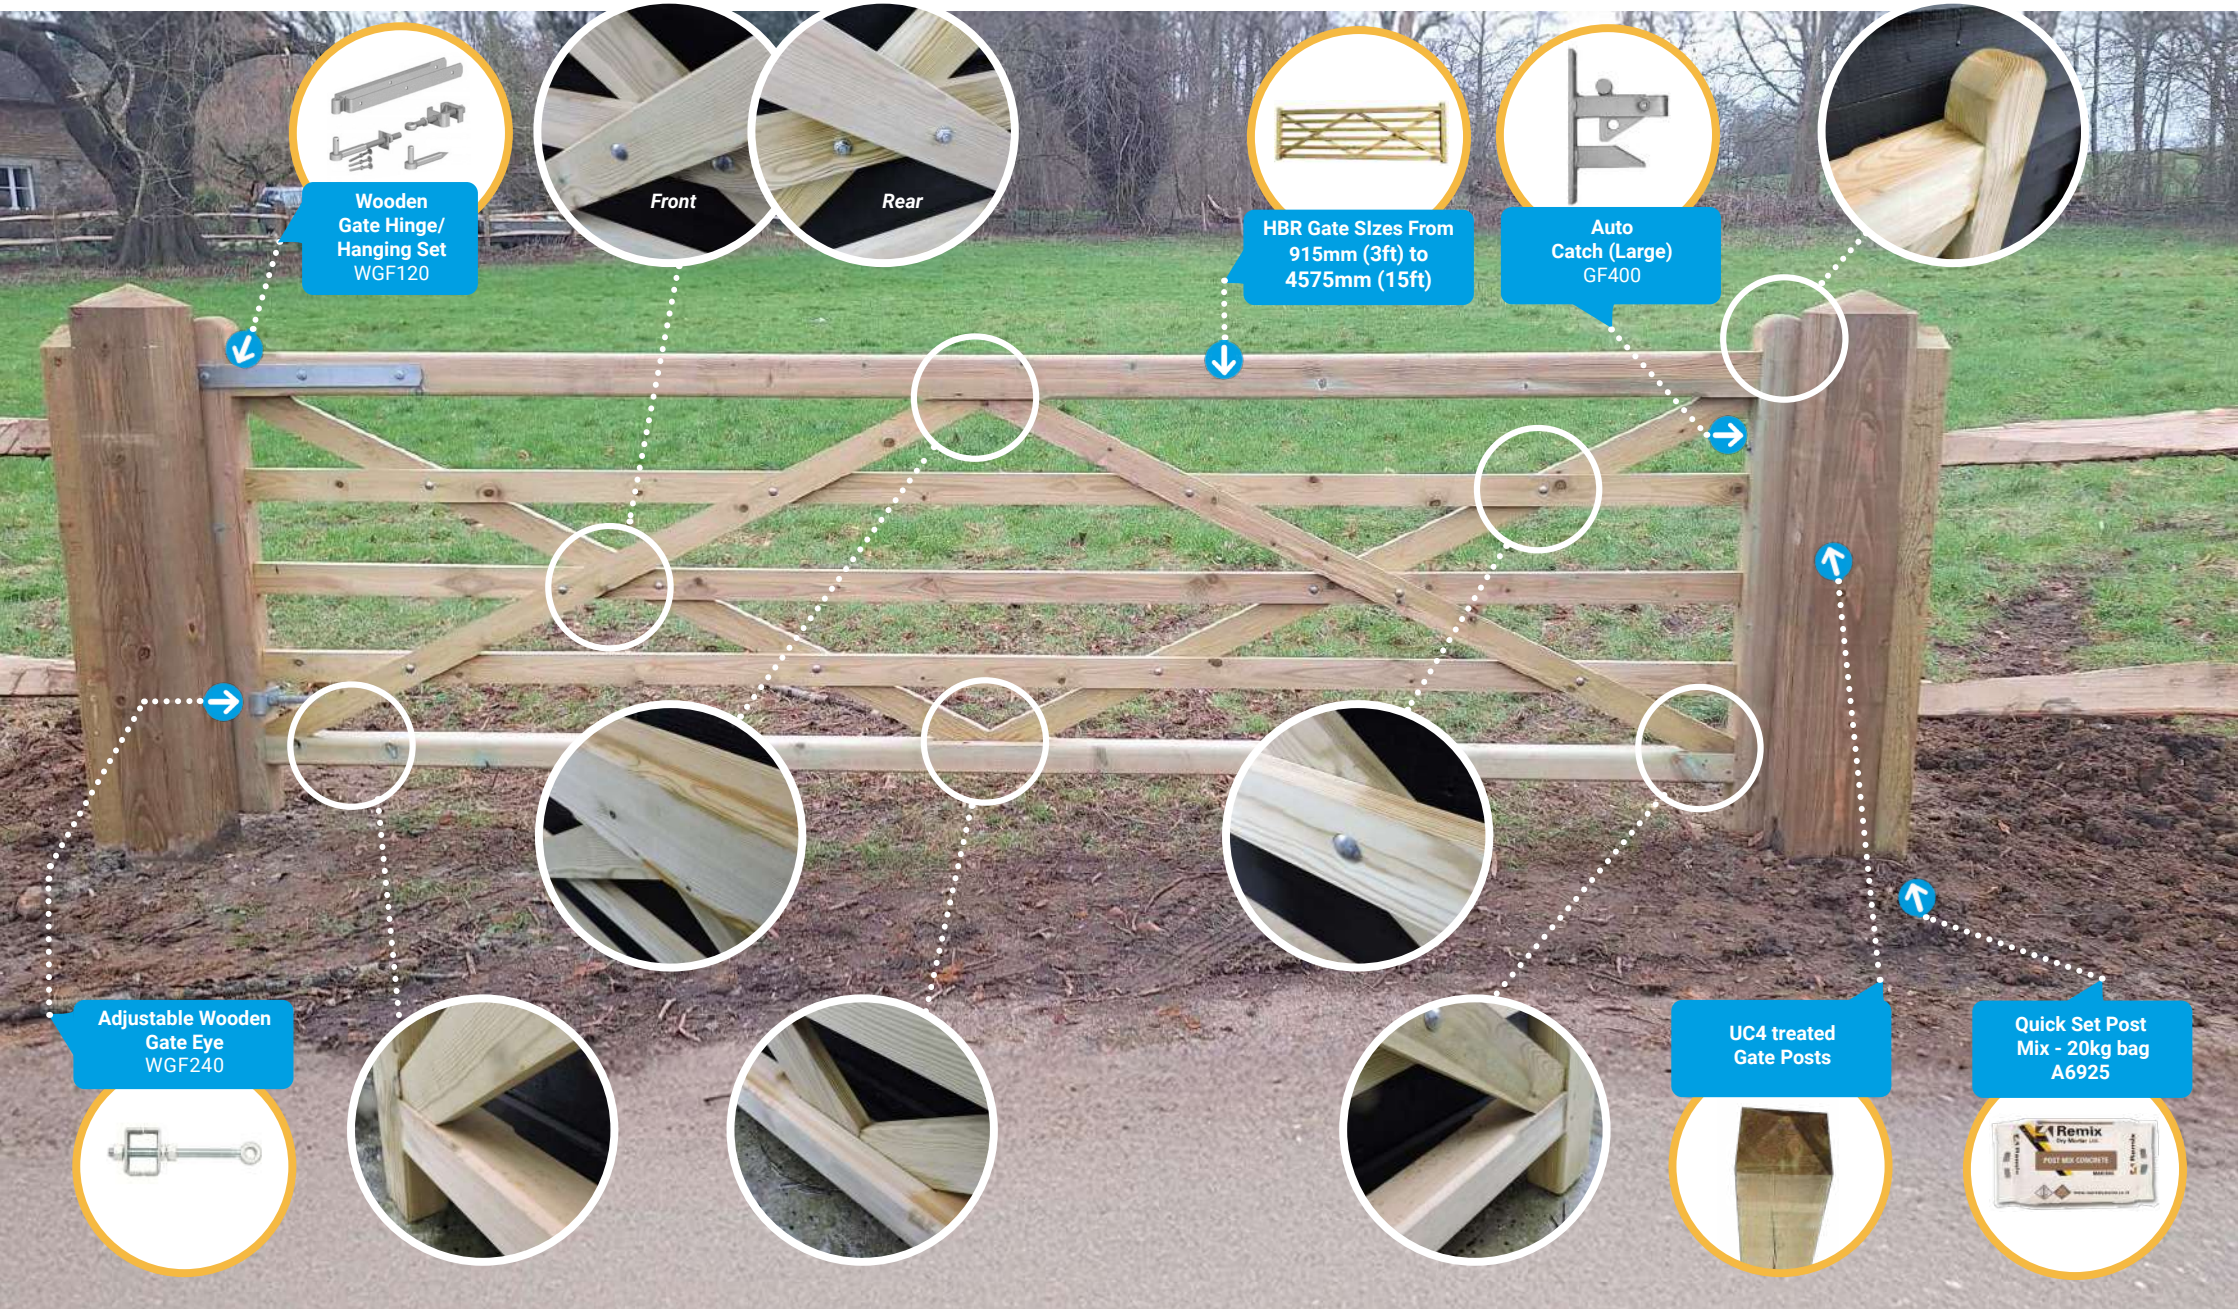

Wooden Gate Posts

Treated to UC4, our gate posts give a 15 year service life and feature a 4 way weathered pyramid top and flat bottom.

All our timber is ethically sourced from forests throughout Europe. All the forests are responsibly managed and replanted after harvesting in line with FSC guidelines.

Lengths from 1830mm to 4575mm and diameters of 125x125mm to 200x200mm. Timber kiln dried to 28% moisture content before treatment, guaranteed treatment to BS8417.





Wooden gate post lengths: 1830 to 4575mm

GATE POST WIDTHS

GATE POST LENGTHS	125x125mm	150x150mm	175x175mm	200x200mm
1.83m	*Posts made to special order*			
2.10m	WGP805	WGP810	WGP815	
2.4m	WGP824	WGP825	WGP830	WGP835
3m		WGP837	WGP838	

We remind customers that wood is a natural 'living' material and this means it is affected by atmospheric and ground conditions, due to the fact that it is not evenly porous, it may dry at an uneven rate. This can create pressure inside the wood potentially causing it to split, warp or twist when its exposed to the atmosphere and sunlight. Pressure treated wood will contract as the water used in the process evaporates from the timber.

Natural weathering should not weaken or decrease the life expectancy of the wood. Using dark stain or other coatings will increase U.V. absorption and speed up the drying process. Using sealant or oils will help hold moisture in and lets the timber dry at a slower rate. McVeigh Parker cannot be held responsible for splitting, discolouration or warping after delivery.

Right Of Way Gates

Woodstock Pedestrian Meshed Kissing Gate



Mobility Friendly Meshed Medium Woodstock Gate



Stonor Pedestrian Meshed Hoop Kissing Gate



Kissing Gate Description	Code
Woodstock pedestrian, meshed hoops	KRW15
Woodstock medium, meshed hoops	KRW25
Woodstock large (radlock), meshed hoops	KRW35
Woodstock pedestrian, plain hoops	KRW10

Kissing Gate Description	Code
Woodstock medium, plain hoops	KRW20
Woodstock large (radlock), plain hoops	KRW30
Stonor pedestrian, plain hoops	KRW40
Stonor pedestrian, meshed hoops	KRW45

Deer Kissing Gate



- Galvanised steel hoops, H-Frame, strengthening bar gate with self closing gate system.
- Circular hoops give easy access for pedestrians. H-Frame and strengthening bar provide rigidity and ease of installation.
- Height and appearance make it suitable for both forestry and parkland situations.

1.2m Woodstock Railed Hoops Self Closing



- Railed hoops
- Integral H frame posts
- Wheelchair access

Click link to view full product range

Braemar Deer Gate



- Easy to install, unit comes in one piece.
- The H-frame provides the whole system with rigidity and ensures the gate leaf is always correctly aligned with the frame
- When in the closed position, the gate is secured using an Easy Latch
- The gate will automatically self close. From fully open in approximately 3 seconds using the offset self-closing hinges

Features

- Access for pedestrians
- Access for horse riders
- Overall installed height - 1900mm
- Overall post to post - 1925mm
- Gate leaf - 1570mm wide x 1870mm high

Bridle Gates

Marlow Bridle Gate 1 way Self Close



- 1.0m - Height 1.0m-1.1m, width post to post 1.3m, gate leaf 1.0m
- 1.2m - Height 1.0m-1.1m, width post to post 1.5m, gate leaf 1.2m

Size	Code
1000mm	RW100
1200mm	RW105

Milton Keynes Bridle Gate 2 way Self Close



RW14
- Clad with 50x50mm mesh
- Galvanised to BSEN ISO 1461
- Integral H frame for easy erection
- Opens in either direction

Chiltern 1.5m Bridle Gate 2 Way Self Close



RW15
- Gate leaf - 1.5m
- Can be opened from horseback
- Height - 1.2m
- Width to post - 1.9m

Stratford Bridle Gate 1 Way Self Close



RW110
- Height - 1.0m
- Width to post 0.95m
- Gate leaf - 0.7m

Henley Bridle Gate



- 1600mm wide gate
- Available as two or one-way
- Stockproof handle option available
- Complies with BS5709:2018 specs

Style	Code
One way	RW57
Two way	RW56

Aston Bridle Gate



Style	Code
One way	RW21
Two way	RW22

- 1200mm wide gate
- Extra strong design suitable for all users
- Trombone handle (standard) provides easier access
- Stockproof handle also available as an option


To view full product range

3.66m Bristol 2 in 1 Combination Gates RW40



Bristol 2 in 1 gate allows pedestrians to be able to pass through the self-closing step gate, the field gate can remain closed or even locked if required.

STANDARD HAND GATE



OPPOSITE HAND GATE
Please note - this item is made to order



Motorbike Inhibitors



RW45

Two galvanised tubular panels partly sheeted.

This design has been tested and proved to inhibit motorbikes whilst allowing access to pedestrians and users of most sizes of mobility vehicles. It is recommended that local users and disabled ramblers are consulted about the siting and the gap that is most suited to them.

All mobility users require a level and hard surface through the barrier.

Also available: Polyester Powder Coated in Moss Green or Black.

Stiles



Wooden Stile Kit
WG900
- A traditional two step stile kit with posts rails and steps
- 1.2m wide
- Manufactured from treated softwood
- Dog gate is extra

Stile sizes & details available online

Have You Seen?

Our DURA² Fencing range.

DURA² is the patented production process which is sustainable, environmentally friendly, and the cost effective alternative to creosoted timber.

See page 44 and 45

Cattle Grids

Drop In Style Cattle Grid



Cattle grids, drop-in style, enables the grid to be installed very quickly with no requirements for concreting during installation.

Various sizes and weights available to control sheep, cattle and deer, all made to BS4008:2006.

All drop in grids are hedgehog friendly with an exit ramp fitted as standard.

IAE ATV FieldLink



TCSATVE

Improve on farm efficiency with IAE's FIELDLINK, designed to eradicate the need for the continuous opening and closing of gates whilst keeping livestock in their desired fields.

Did You Know?

We also sell plastic fast fill water troughs on p119.



Hopkins Cattle Grids

- Hopkins are the original creators of the Quick-Fit Cattle & Deer Grid System
- BRITISH MADE
- Depth of grid 14"/ 355mm
- Ideal for Farm, Estate or Forestry roads or Highways
- All Steelwork Galvanised to BS EN ISO 1461:2022 which supersedes BS EN ISO 1461:2009.
- Supplied with optional and removable stock proof side rails.
- Fast delivery times

Also available the ***Traditional Tubular style grid*** and ***The Additional Protection grid***, suitable for those with sheep or goats, available in 26 ton and 50 ton.

5T Grid - 3T Max Axle Loading (x Standard Cattle Jump 2.69m)
26T Grid - 6.5T Max Axle Loading (x Standard Cattle Jump 2.69m)
50T Grid - 11.5T Max Axle Loading (x Standard Cattle Jump 2.69m)
50T Grid - 11.5T Max Axle Loading (x Standard Deer Jump 4.65m)
196T Grid - Standard BS EN Loadings Highway use (x Standard Cattle Jump 2.69m)

FOR FULL DETAILS OF HOPKINS CATTLE GRIDS VIEW ONINE



Download, read and use the complete Hopkins installation guide

Barrier Gates

Give your property that extra bit of security and peace of mind with one of our heavy duty barrier gates, posts and bollards.

Tubular Barrier Gate

- 762mm height
- Suitable for closing off vehicular access
- Padlockable sliding bolt fastening
- 50mm x 50mm SHS sleeved hanging stile
- Bespoke sizes available at extra cost
- Hang and slam posts can be purchased at an extra cost

Gate Width Options			
3660mm (12')	4270mm (14')	4880mm (16')	6710mm (22')



Heavy Duty Triangular Vehicle Barrier





Manufactured from 100mm x 50mm RHS and hot dipped galvanised after manufacture.

The PADDOCK SECURITY BOX system is incorporated into the slam post thus allowing the barrier to be used either left or right handed.


All barrier gates to fit 25mm gate eyes.

Gate Width Options				
3660mm (12')	4270mm (14')	4575mm (15')	6100mm (20')	6710mm (22')

Rectangluar Barrier Box Section Gates



Gate Width Options		
3660mm (12')	4270mm (14')	4880mm (16')

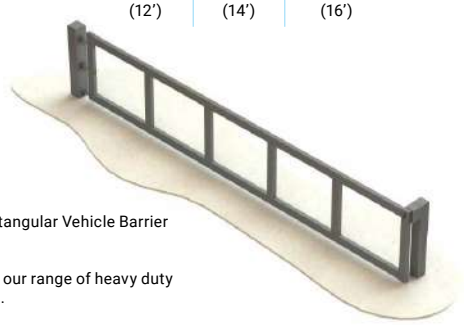

Constructed from galvanised 100mm x 50mm RHS, the Heavy Duty Rectangular Vehicle Barrier inhibits access for any vehicle on a right of way.

Where a more robust security solution is required to front a right of way, our range of heavy duty barriers are designed to offer a functional, practical and secure solution.

All of our vehicle restricting barriers incorporate a padlock security box into the slam post, protecting padlocks and preventing them from being accessed by bolt croppers.

Height Restrictor Barrier





Constructed from galvanised 100mm x 50mm RHS, the Height Restrictor features a height restrictor barrier and a vehicle barrier which can both be opened or locked shut. The Height Restrictor is best suited to situations where vehicles up to a height of 2000mm are allowed access to the right of way.

Gate Width Options		
3660mm (12')	4270mm (14')	4880mm (16')

Heavy Duty Horse Friendly Vehicle Barrier



Available In Three Width Sizes

The Heavy Duty Horse Friendly Barrier is crafted to restrict motor vehicle access while ensuring a seamless passage for horses and pedestrians on foot. Constructed with a robust blend of galvanised steel and timber, this barrier stands as a durable and secure choice for any bridle path.




Barrier Gate Posts



- Heavy Duty construction to deer drivers from trying to access the right of way
- Padlockable so the barrier can be permanently locked shut
- Slam post incorporates a padlock security box
- Can be used left or right handed
- Galvanised as standard, however, at an extra cost the barrier can be finished in Moss Green or Black Polyester Powder Coating

Post Spec.	Post Style	To suite
114.3mm dia.	Hang post	Up to 4880mm barrier gate
139.7mm dia.	Hang post	
120x120mm	Hang post	
114.3mm dia.	Slam post	
100x100mm	Slam post	

Bollards







A strong and effective system to prevent unwanted vehicular access whilst enabling simple operation by authorised users.


Bollard	Post Style	Post Full Height
A	Retractable	300-400mm
B		600mm
C		170mm
D	Drop down	900mm
E	Steel galv.	900mm

Metal Gate fittings

We select our stock for quality and suitability for purpose, so you can be sure that our fittings will withstand the test of time, as well as any livestock pressures! All of our fittings are fully galvanised to the expected British standards.

Use the following gate fittings menu to find the parts you need


Hanging Gate fittings

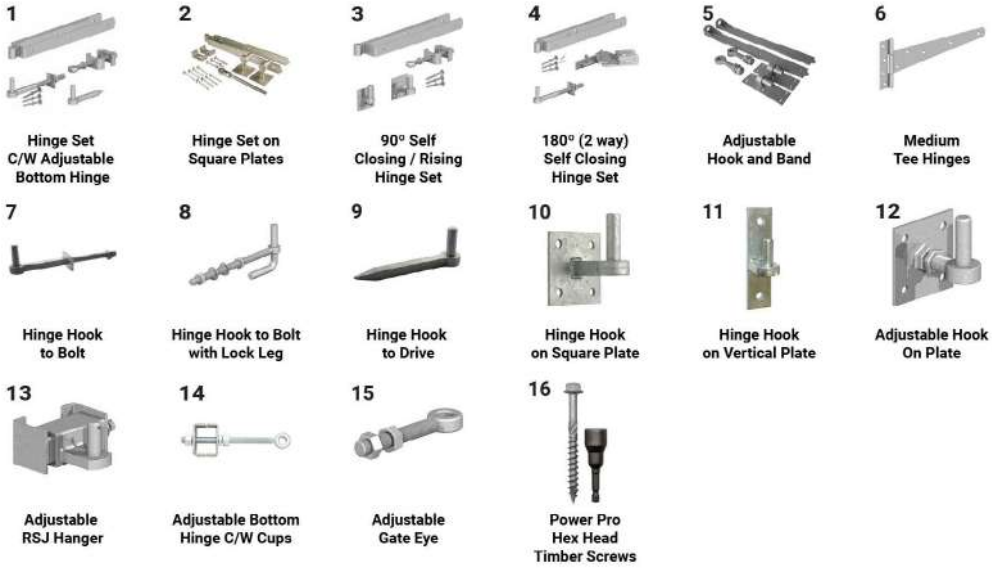

Closing Gate fittings (Metal Gates)



Closing Gate fittings (Wooden Gates)

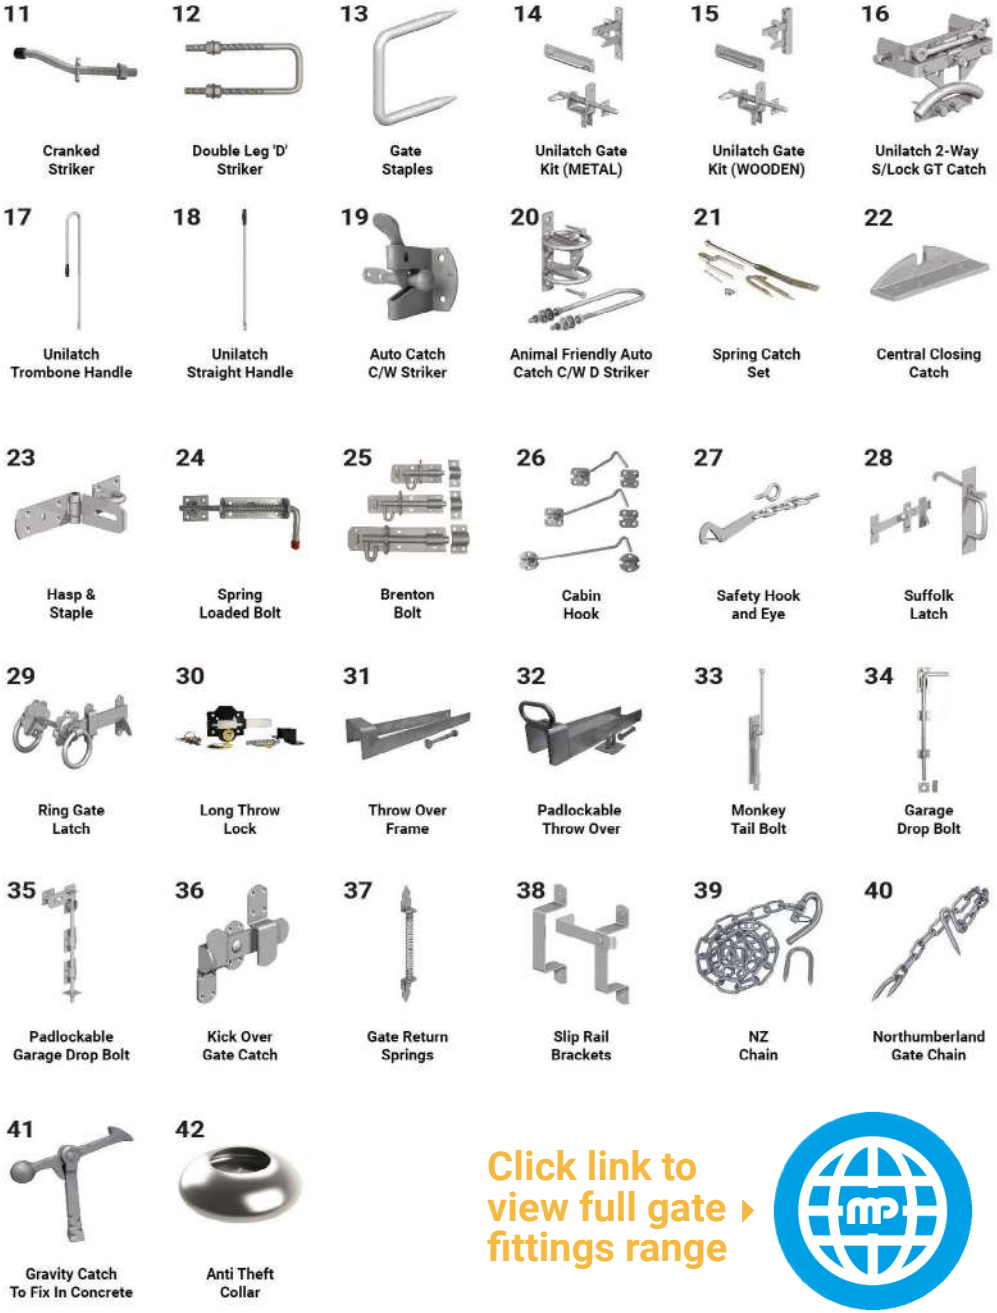

Click link to view full gate fittings range

Farming



From drinkers to silage wrap, we've got you covered.

We are a one stop shop for a huge range of farming supplies including livestock handling equipment, feeders, drinking troughs, Stokbord and harvest products to name just a few.

IAE

CLIPEX Fencing & Stockyards

JFC Leading Stockist



Drinking Troughs

We stock a huge range of water troughs in a selection of materials, sizes and profiles to suit your needs, available to buy as standalone troughs, or complete kits.



Livestock Handling

We stock a huge range of farming supplies from sheep trailers to cattle crushes, feeder to races. Whether you're weighing or EID reading, crutching or dagging we have a solution to suit your requirements.

Sheep Equipment

From weighing products and feeders to sheep hurdles and races we have everything you need to help make sheep handling easier. We stock leading brands like IAE, CLIPEX and WM Ironwork as well as an array of bespoke solutions to specifically meet your requirements.



Harvest

We are proud to bring you the very best brands of harvest products all at excellent prices. From Visqueen silage sheets to Cordex twines, net and stretch wrap, we have everything you'll need to help make your harvest run smoothly.





Cattle Equipment

From individual to modular systems that help you as you grow your herd, we have all you need, including feeders, cattle handling systems, crushes, calf equipment and a made to measure service available.



Stokbord

Centriforce

For a more environmentally friendly alternative to ply, our range of Stokbord recycled plastic sheets offer you a long lasting and hygienic sheet. It is extremely flexible, robust and maintenance free, making it great for poultry and livestock housing and races.

Cattle Crushes & Handling Equipment

Our cattle crush and handling range includes modular cattle handling systems that allow you to grow your cattle system with your herd and is suited to a variety of cattle breeds

British Made Cattle Crushes *Over Seven Designs To Choose From*







Super Scoop MK 4.5

TC41910

- Restricts the side to side movement of the animal's head
- Provides increased safety for the animal and the operator
- Takes the strain out of tasks such as dosing and ear tagging
- Suitable for a range of IAE crushes



Calving Hurdle Deluxe



TC3250

- Easy access for suckling calf
- Yoke to hold animal in place
- Removable rails

Tamar Squeeze Handling Trailer



TC42000

- 7340mm (inc draw bar) (L) x 2050mm (inc tyres) (W)
- All galvanised to BSEN ISO 1461

Calf De-Horner Crate - Large



TC8200

- 1185mm x (L) 480mm (W) x 1195mm (H)
- Full access to rear of animal
- Easy to move with wheels and handle fitted

IAE Rotex Mobile Handling System



TC3195

- Superbly convenient portable cattle handling system
- Extremely portable, quickly assembled, and safe
- Semi-circular layout for animal welfare and operative safety

IAE NEW 800 series crush range

Check out full cattle crush range

Cattle Feeders

Diagonal Feed Fence Panel



TC1420

- A well proven feeding system which prevents floor wastage and bullying
- Available with or without timber base
- 4420mm long x 915mm high
- Gate option available on request
- Adjustable fence option available

Portable Diagonal Feed Fence Panel (2 in 1 Unit)



TC1140 (3050mm) TC1160 (4575mm)

- Panel length options: 3050mm & 4575mm
- Finished height 1375mm
- Option 690mm wide x 345mm deep steel feed trough
- Option 790mm wide x 405mm deep steel feed trough

Cattle Feed Ring



TC2110
- Manufactured in two sections bolted together
- Durable, tough and resilient

Size	Code
Yearling: 1600mm dia. 1145mm (H)	TC2140
Standard: 2135mm dia. 1295mm (H)	TC2110
Heavy Duty: 2135mm dia. 1450mm (H)	TC2120

Heavy Duty Tombstone Feeder



TC2150
- 2285mm diameter x 1150mm (H) x 670mm deep welded base
- 12 feed spaces
- Also suitable for horses

Calf Creep Feeder



TC8100
- 2500mm long x 1800mm wide x 1500mm high
- A no nonsense shelter with fixed vertical rails and an adjustable horizontal creep bar
- Features a 725 litre capacity hopper, fork-lifting facility and a three point linkage

Bullock Trough Heavy Duty - Galvanised



TC6100
- Fully welded for all feed types
- Floor feeding trough with excellent stability
- Heavily galvanised to BSEN ISO1461

Cattle Feed Trough



TC6110
- 2740mm (L)
- 420mm (W)
- 190mm (D)

Low Level Beef Trough on Legs & Badger Defence Kit



TC6140 (Beef Trough On Legs)
TC6145 (Badger Defence Kit)
- 2440mm (L)
- 786mm (W)
- 230mm (D)
- 915mm legs
- Badger proof

Feed troughs can also be purchased without the badger defence kit

Stainless Steel Quick Empty Trough




- Available in two lengths: 2022mm (159L) or 3102mm (238L)
- Ideal for high traffic cattle areas(dairy housing)
- This design reduces algae and bacteria for improved hygiene and water quality large 89mm diameter drain for efficient emptying

Portable Cattle Handling System

- Strong yet easy to move
- Suitable for yard or field use

Because of the modular design of our Galvanised Portable Cattle Handling System, it is easy to tailor make a system to perfectly suit your own requirements. All items are quick and easy to assemble.

Suitable for both yard and field use (may require some permanent fixtures in a yard).

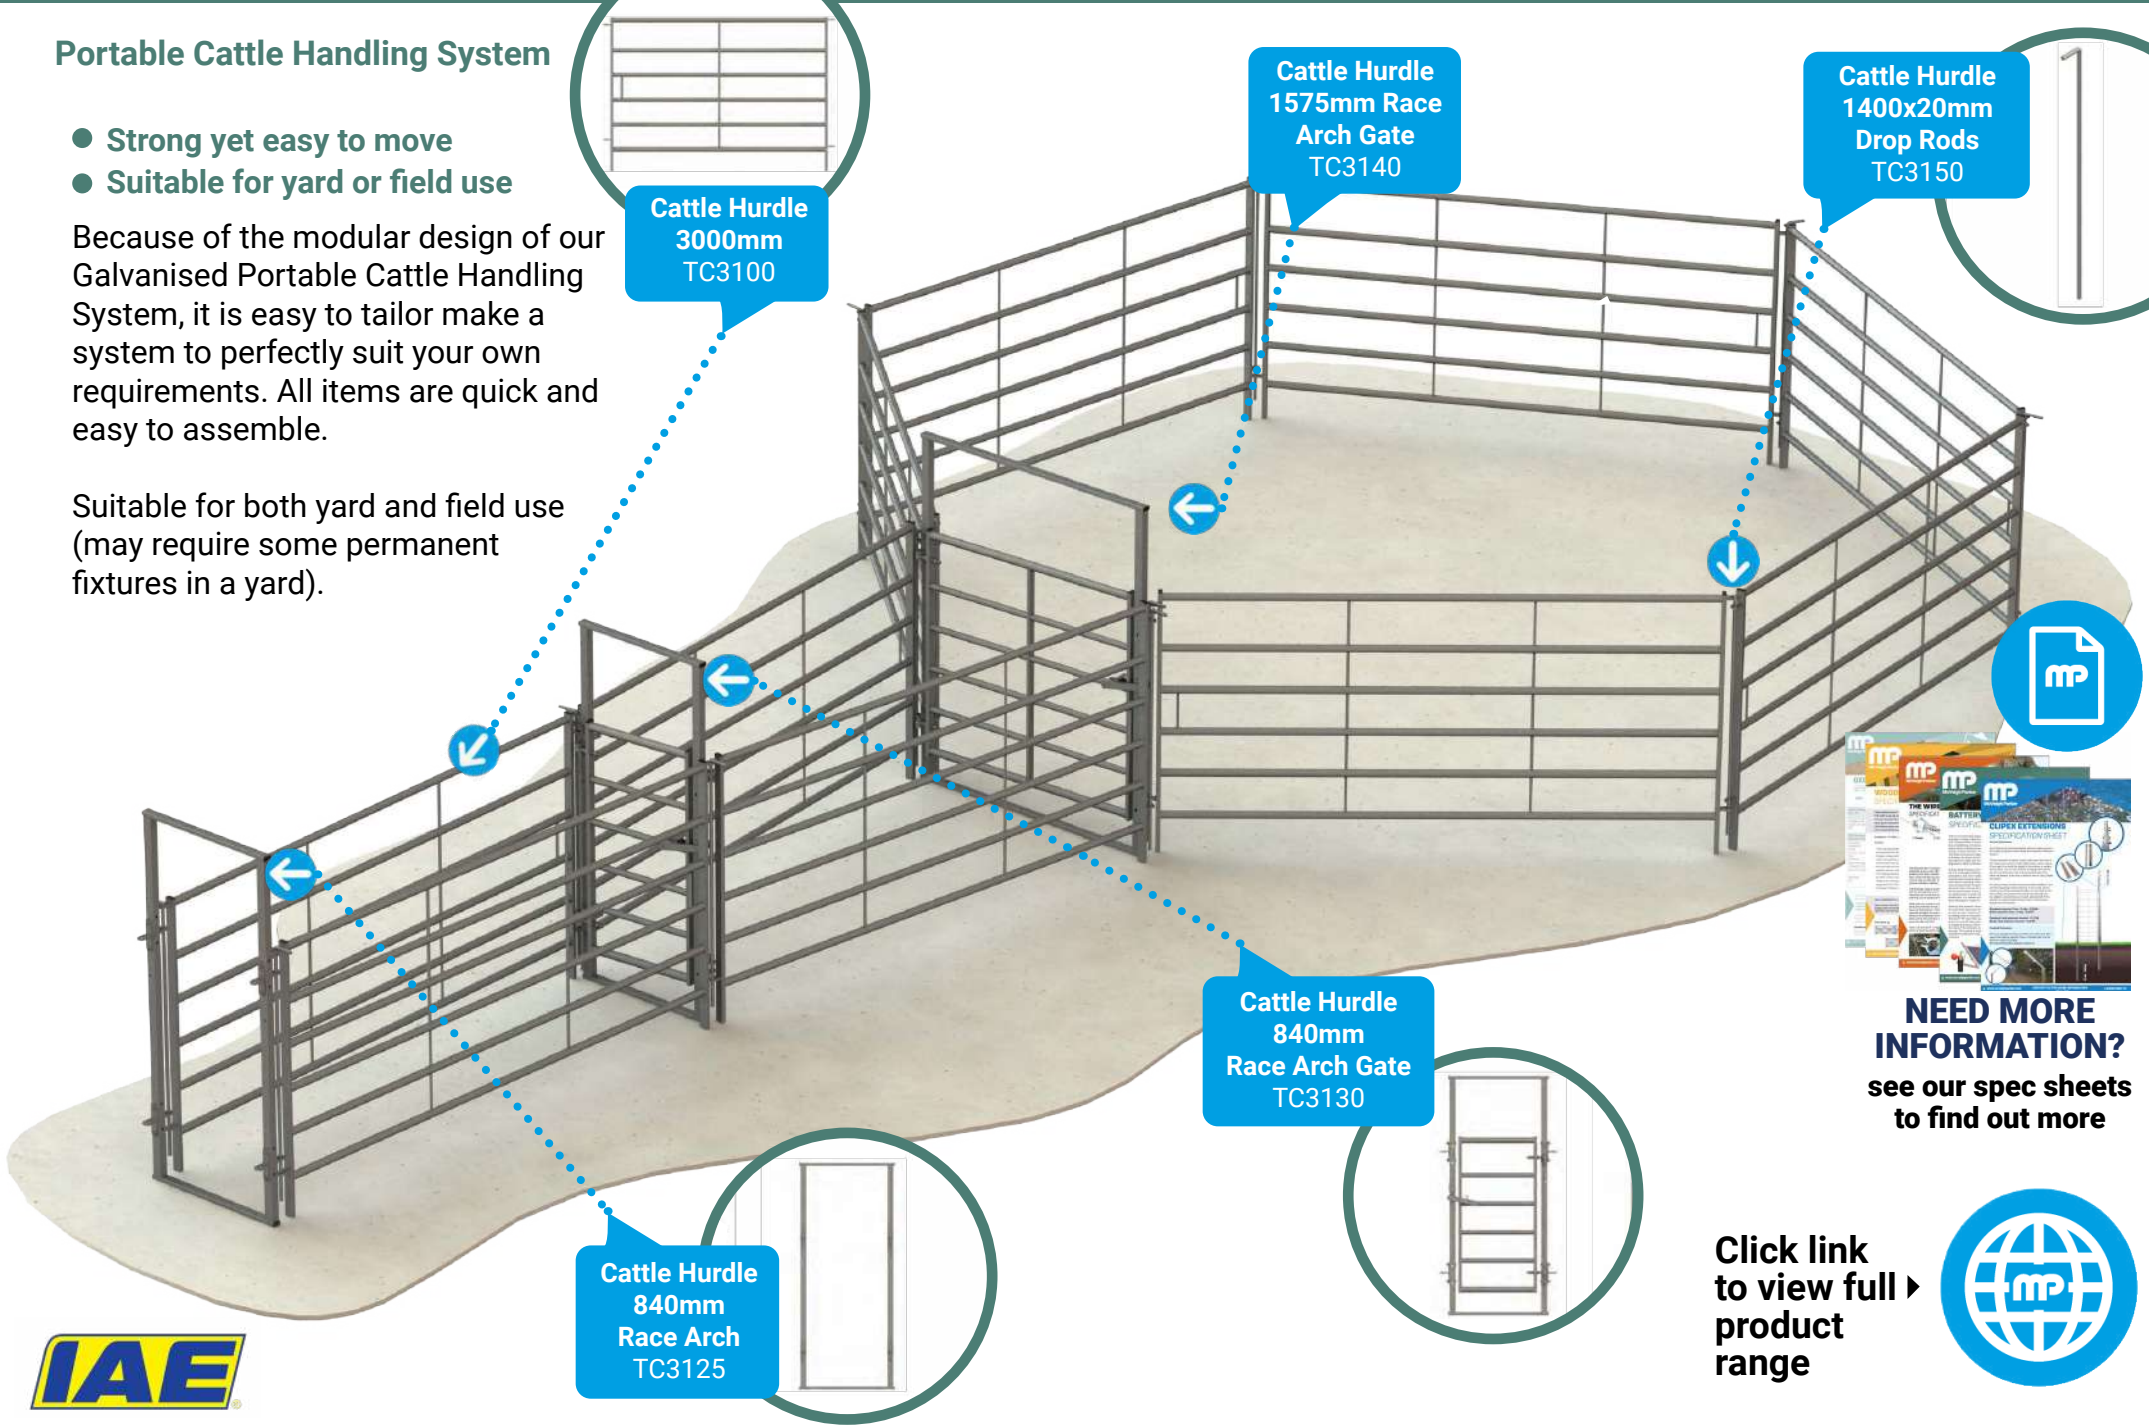

NEED MORE INFORMATION?

see our spec sheets to find out more

Click link to view full product range

Sheep Equipment

Our sheep handling range is designed and manufactured to make day-to-day handling of livestock more straightforward. Our comprehensive range includes sheep handling products like hurdles, sheep races, handling crates, weighers and footbaths.

Sheep Feeders

Sheep Hayrack on Wheels





- Double sided 76mm x 76mm hayrack
- New and improved design
- Suitable for small livestock and Alpacas
- Supplied with 4 x 254mm wheels x 25mm bore with rubber tyre
- 799mm wide lid with a Protex fastening and lid catch
  600mm wide x 813mm high

Size	Code
1200mm	TS3215
2400mm	TS3210
3000mm	TS3200

Lamb Creep Feeder



- 460mm (W), 650mm (H), 728mm wide lid
- Unique easy exit up ladder designed toreduce head trapping

Descript.	Length	Feeds	Capacity	Code
1.2m feeder	1250mm	12 feed spaces (designed to feed approx. 20)	117L	TS3110
2.4m feeder	2440mm	24 feed spaces (designed to feed approx. 35)	234L	TS3335



Description	Code
Lamb creep feeder trailed Kit to suit 1.2m	TS3111
Lamb creep feeder trailed Kit to suit 2.4m	TS3336

- Now available with retro fit trailed kit to tow behind an ATV offroad

Double Sided Hay Feeder Basket



Feeder baskets to be used with interlocking sheep hurdles



TS1100

- 475mm x 475mm x 490mm
- 75mm x 75mm mesh
- Holds at least 2 slices of hay from a small bale

Hook over Sheep Hayrack



TS4300

- 75mm x 75mm weldmesh
- Sheeted end panels
- Hook brackets welded on

Size	Code
600mm	TS4295
915mm	TS4300
1250mm	TS4305
1830mm	TS4320

Sheep Feed Ring



TS2110

- Suitable for sheep, lambs and alpacas
- 24 feed spaces
- For inside or outside use

Hook on Sheep Trough



- 284mm wide x 123mm deep
- Ideal trough for calf or sheep pens when housed
- A portable feeding solution

Size	Code
915mm	TS4200
1370mm	TS4230
1830mm	TS4240

Sheep Feed Trough



- A quality sheep trough of rigid construction
- Suitable for sheep, alpacas, goats, ponies, pigs and deer

Size	Code
900mm	WT403
1830mm	TS4130
2745mm	TS4140

Hook on available for 900mm & 1830mm size

Sheep Hurdles


Interlocking Sheep Hurdles



- 970mm (3ft) tall
- Interlocking for stability
- Looped ends allow for easy connecting

Size	Code
1200mm	TS1110
1500mm	TS1119
1800mm	TS1120
2400mm	TS1130


Interlocking Half Mesh Hurdles

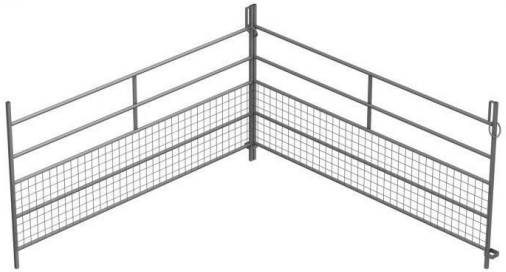

- 1050mm high half meshed sheep hurdles
- Available in 1.2m or 1.8m lengths
- Easily combined to create runs and pens

Size	Code
1200mm	TS1230
1800mm	TS1350

Lamb Creep Hurdle

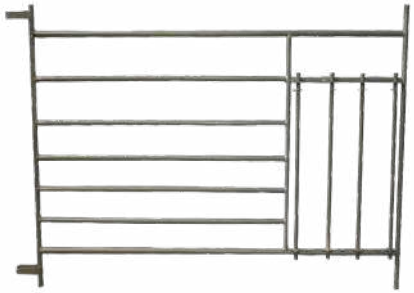

TS1310

- 1830mm x 970mm high
- 7 horizontal rails
- Loop type coupling, compatible with interlocking hurdles

Sheep Handling

IAE OviHandler





- Quick-grip. A clamp style handler with pneumatic power, suitable for aiding
- in routine procedures such as worming, drenching, vaccinating and dagging
- Ergonomic design raises the sheep to a comfortable working height, with unparalleled access
- Drafting gates on exit for sorting into groups
- Different width settings make the Ovihandler suitable for flocks of varying sizes
- Integrated rechargeable battery for operation away from the homestead

Ewe-Turnover Crate



TS7100

- Ease of operation for left or right handling with 2 height options
- Fully galvanised to BSEN ISO 1461
- 1600mm long x 820mm wide x 1100mm high

Did You Know?

We also sell steel sheep water troughs on p121.



Sheep Race System D


- Approximately 15m long x 5.1m wide
- All galvanised to BSEN ISO 1461

Sheep System D is the corner stone of a very versatile system, utilising a 4.88m x 8.6m long approx semi circular forcing pen.

Capable of holding 40 - 60 breeding ewes.

Sheep System D Plus builds on this to provide additional holding for one hundred head.

Other size systems available
All products can purchased separately

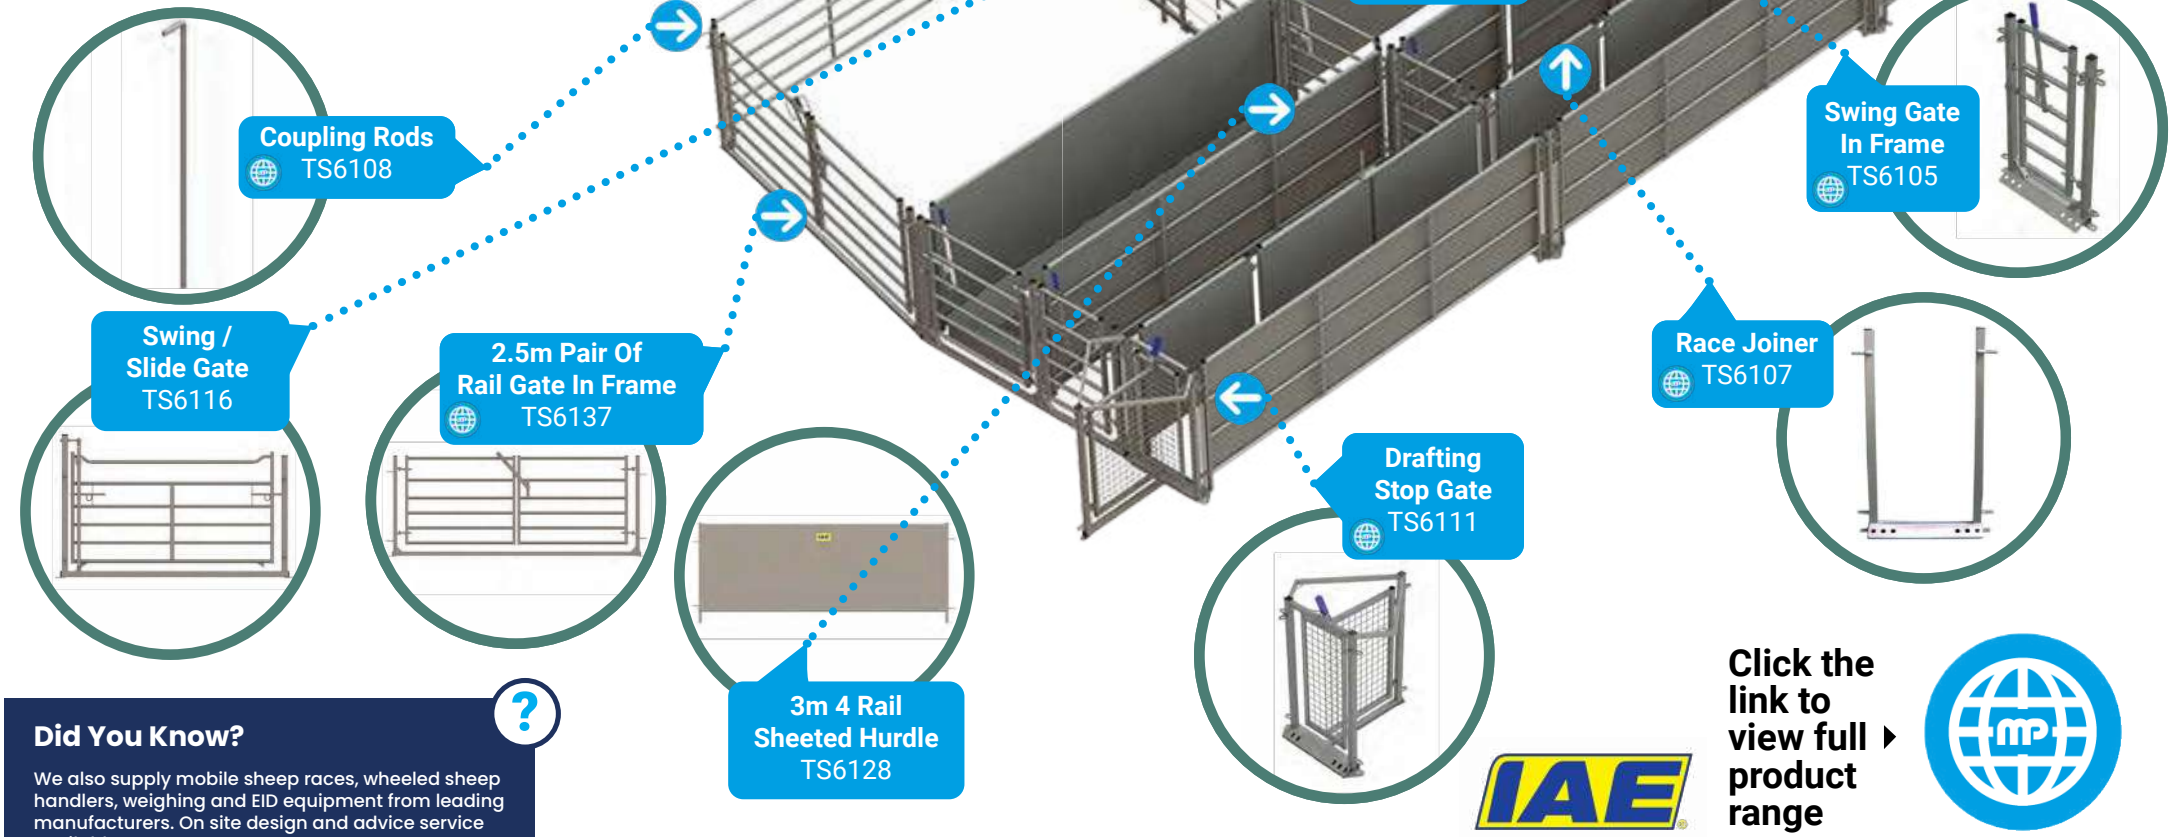

Did You Know?

We also supply mobile sheep races, wheeled sheep handlers, weighing and EID equipment from leading manufacturers. On site design and advice service available, contact us now.

IAE

Click the link to view full product range

Plastic Water Troughs

A plastic water trough is the perfect solution. Light, but strong and resistant, our plastic water troughs are easy to clean and transport. We have a variety of portable yet durable troughs available. Choose from fast-fill, single or double troughs in a variety of sizes. All plastics are frost-proof, UV protected and can withstand extreme climates, so are suitable for indoor or outdoor use. Perfect for horses, sheep, cattle and most other livestock, our water troughs are the ideal solution for your farm or field.

JFC Fast Fill Water Trough Key Features

- Fitted with a fast-flow valve (up to 41L/min @ 3 bar pressure).
- Valve protected with a polyethylene compartment with easy access.
- Thick walls for greater strength and durability.
- High freeze / thaw cracking resistance.

Plastic Water Troughs

JFC 15 Gallon Water Trough

JFCDT15



- 700 x 475 x 310mm
- Capacity 15 gallons / 68 litres
- Overflow 81 litres
- Fitted with a fast-flow valve (up to 34L/min @ 2bar pressure)

All water troughs fitted with a fast fill ball valve

JFC 30 Gallon Easy Access Trough

JFCDT30



- 1250 x 475 x 310mm
- Easily moved from site to site
- Fitted with 2 drain offs for easy emptying and cleaning
- Fitted with a fast-flow valve (up to 41L/min @ 3 bar pressure)

JFC 450 Gallon Round Water Trough

JFCDT450



- 2130 x 830mm
- Ideal for large groups of cattle
- Light and easy to move
- Drain plug fitted for easy emptying
- Fitted with a fast-flow valve (up to 41L/min @ 3 bar pressure)

JFC Thermal Drinker

WOJFCTHERMALDRINKER



- Capacity - 20L
- 490mm D x 500mm W x 460mm H
- Prevents water freezing during winter months

JFC Conventional Drink Bowl

JFCDBL



- Dimensions: 395 x 400 x 340mm
- 16 litres (3.5 gallons)
- Fitted with a 1/2" brass valve
- Built in drain plug

JFC Micro Bowl Drinker

JFCDBL4



- Dimensions 330 x 254 x 228mm
- 4 litres (0.9 gallons)
- Float valve & stainless steel protection cover 50mm drain off plug
- Blue bowl comes with brass ball valve for low pressure systems such as header tanks
- Green bowls come with Opella ball valves for high pressure mains systems

Click the link to view full product range

Do You Need Our Advice?

Stuck with a particular part of a project and need advice? Then feel free to get in contact and our helpful staff will endeavour to help you.

JFC Double Reservoir Fast Fill Water Trough



Capacity	Dimensions (mm)
68L / 15 Gal	700D x 475W x 310H
136L / 30 Gal	1250D x 475W x 310H
400L / 88 Gal	1550D x 730W x 530H

JFC Oval Fast Fill Water Trough



Capacity	Dimensions (mm)
450L / 100 Gal	1550D x 990W x 685H
600L / 130 Gal	1610D x 1180W x 840H
800L / 175 Gal	1970D x 1180W x 840H
1000L / 220 Gal	2180D x 1180W x 840H

Tapered sides to reduce badger access.

JFC Circular Fast Fill Water Trough



Capacity	Dimensions (mm)
871L / 190 Gal	1540 ø x 675H
1125L / 248 Gal	1725 ø x 600H
1590L / 350 Gal	1590 ø x 750H
1590L / 350 Gal	1590 ø x 750H


Tapered sides to reduce badger access.

Do you know the drinking water requirements for your livestock?

These figures are guides only as individual requirements will vary depending on individual circumstances, environment and diet.




Cattle

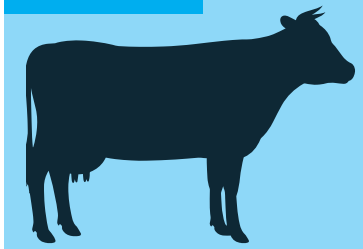

50L LITRES/DAY
COW WITH CALF

68–155L LITRES/DAY
DAIRY COW


Pigs



18–23L LITRES/DAY
LACTATING SOW

13–18L LITRES/DAY
GESTATING SOW/BOAR

Sheep



9–10.5L LITRES/DAY
EWE WITH LAMB

4–6.5L LITRES/DAY
PREGNANT EWE / RAM

SOURCE: DAERA.GOV.UK

Our drinking troughs are suitable for cattle, sheep, horses, alpacas and many other species. We have steel drinking troughs, plastic water troughs, universal drinkers and bowls, trough accessories and pumps.

Steel Water Troughs

Steel Livestock Water Trough

- 457mm wide x 405mm deep
- Includes 10mm drain plug & bung
- Manufactured from 1.5mm flat steel
- 30mm roll top for added strength and stability



Length	Capacity	Weight	Code
600mm (1' 11")	109ltr (24 gallons)	18.65kg	WT02
900mm (2' 11")	163ltr (36 gallons)	24.80kg	WT03
1200mm (3' 11")	218ltr (48 gallons)	30.95kg	WT04
1500mm (4' 11")	272ltr (60 gallons)	37.08kg	WT05
1800mm (5' 11")	272ltr (60 gallons)	43.76kg	WT06
2400mm (7' 11")	327ltr (72 gallons)	56.82kg	WT08

Large Steel Livestock Water Trough

- 610mm wide x 610mm deep
- Includes 10mm drain plug & bung
- Manufactured from 1.6mm flat steel
- 30mm roll top for added strength and stability



Length	Capacity	Weight	Code
1200mm (3' 11")	454ltr (100 gallons)	47.51kg	WT204
1800mm (5' 11")	681ltr (150 gallons)	65.94kg	WT206
2400mm (7' 11")	980ltr (200 gallons)	84.38kg	WT208
3000mm (9' 10")	1135ltr (250 gallons)	99.91kg	WT210

Steel Sheep Water Trough

- 457mm wide x 267mm deep
- Includes 10mm drain plug & bung
- Manufactured from 1.5mm flat steel
- 30mm roll top for added strength and stability



Length	Capacity	Weight	Code
1200mm (3' 11")	136ltr (30 gallons)	24.94kg	WT404
1800mm (5' 11")	204ltr (45 gallons)	35.59kg	WT406

Large Capacity Water Trough

- 1200mm wide x 610mm deep
- Includes 24mm drain plug & bung
- Manufactured from 2.0mm flat steel
- 30mm roll top for added strength and stability
- Fully welded integral service box (ball valve housing)



Length	Capacity	Weight	Code
3000mm (9' 10")	2270ltr (500 gallons)	194.54kg	WT302

Please note - All steel troughs are welded and then fully galvanised to BSEN ISO 1461 | WRAS Compliant

Disclaimer: Tolerances + or - 2%, please check at time of ordering if measurement is crucial

Concrete Water Troughs & Supports



Concrete Troughs

- Product only stocked in our Devon depot
- Available in 6 sizes
- Special delivery terms - ask for a quote

Description	Capacity	Dimensions	Weight	Code
Top Fill Troughs	20 gallons	*812.8mm (32") long x 609.6mm (24") wide x 381mm (15") high*	210kg	WTTF20
	40 gallons	*1498.6mm (59") long x 609.8mm (24") wide x 381mm (15") high*	333kg	WTTF40
	75 gallons	*1854.2mm (73") long x 736mm (29") wide x 444.5mm (17.5") high*	475kg	WTTF75
	150 gallons	*1930.4mm (76") long x 914.4mm (36") wide x 622mm (24.5") high*	890kg	WTTF150
	225 gallons	*2133.6mm (84") long x 1117.6mm (44") wide x 685.6mm (27") high*	1180kg	WTTF225
	300 gallons	*2286mm (90") long x 1270mm (50") wide x 730.25mm (28.75") high*	1400kg	WTTF300
	400 gallons	*2921mm (115") long x 1270mm (50") wide x 730.25mm (28.75") high*	1750kg	WT8400
	500 gallons	*3352.8mm (132") long x 1270mm (50") wide x 730.25mm (28.75") high*	1900kg	WT8550
In House Drinkers	70 gallons	*2011.68mm (79") long x 609.8mm (24") wide x 800.1mm (31.5") high*		WT8110
	140 gallons	*3992.88mm (157") long x 609.8mm (24") wide x 800.1mm (31.5") high*		WT8120
Trough Supports		*460mm (19") wide*		WTS10
		600mm (23.6") wide		WTS20



Concrete Trough Supports

- Suits our 457mm & 600mm wide steel water troughs
- Effectively supports the water trough
- Raises the trough to the ideal drinking height

Available in two widths (460mm & 600mm)

Calf & Lamb Rearing, Footbaths

Milk Kart with Mixer

JFC MK170MP-3

- 1.5" lever valve allows user to control the amount dispensed
- Twist on lid minimises spillages and contamination
- Galvanised steel frame and dispensing nozzle
- Kart, motorised mixer and pump all available as separate items or as a combination
- Upgraded braked castor swivel wheels allow smooth manoeuvrability



10 Teat Calf / Lamb Feeder

- Designed with 2 reinforced hangers for mounting on a gate, rail or fence.
- Fitted with 2 hooks to provide extra security.
- Designed with minimum crevices making them easy to clean.
- An efficient way of delivering milk to 10 calves at once.
- The teats encourage a natural sucking action allowing milk to be delivered at an optimum rate.
- 22mm bored hole for fitting.



Calf Hutches

- No planning permission required.
- Easy to clean and disinfect, providing a hygienic environment for the calf.
- Strong, durable and weather resistant.
- Adjustable roof vent for ventilation.
- Lightweight and easy to handle.
- A cost effective and versatile alternative to permanent shed/ buildings.



JFC Ribbed Sheep & Cattle Footbaths

- Heavy duty, easy to clean plastic
- Helps reduce the spread of infection
- Profiled base opens hooves for extra penetration of solution



Sheep / Calf Drinking Trough

JFCDBL2

- Fitted with 1/2" brass valve, capable of up to 5L/min at 3 bar pressure (1/2" connection).
- Refills in 6 minutes at 3 bar pressure.
- Narrow double reservoir for placement between two areas giving several animals simultaneous access to water.
- Supplied with 2 stainless steel mounting brackets.
- Manufactured from tough and frost resistant polyethylene.



Large Gate / Fence Feed Trough

JFCGFT 1



- Designed with 2 reinforced hangers for mounting on a gate, rail or fence.
- Fitted with 2 hooks to provide extra security and to prevent calves from knocking the feeder.
- Rounded edge design ensures animal safety.
- Finished with a smooth seamless coat to reduce feed build up and for ease of cleaning.
- Can be stacked to save space.
- Easy to transport

Pasture Pumps

Aquamat II Pasture Pump Kit

KPP



- Ideal for cattle and horses
- Protects river banks and water courses
- Low cost solution for those without mains water or in catchment sensitive areas


Features

- 1 x Aquamat Nose pump Mk II
- 1 x Filter basket
- 7m of reinforced flexible hose
- Can supply 15-20 head of cattle
- Protects river banks and water courses
- Rust and UV resistant
- Quick installation time, approx. 20 mins
- No power is required to operate
- Tough polypropylene trough and steel mechanism
- Provides 7 metres vertical lift or 70 metres horizontal lift
- Dispenses 0.5L with each pump lever action
- Trough capacity 1 litre

Rough installation drawings

A. Traditional water source extraction

B. Using underground water source

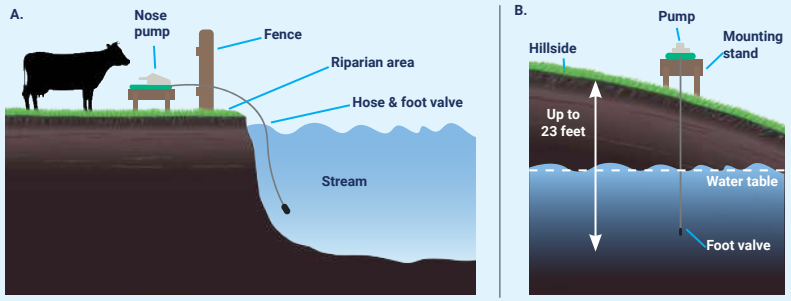


Battery and Solar Water Pump

SOLAR WATER PUMP

- Durable, weather-proof, polypropylene
- Holds up to 86 amp hour (12V) batteries
- Supplied with 30m hose and 30m cable

Kit includes

- Control box and battery compartment
- 60w solar panel and stand
- 30m hose
- Submersible pump
- With 30m cable

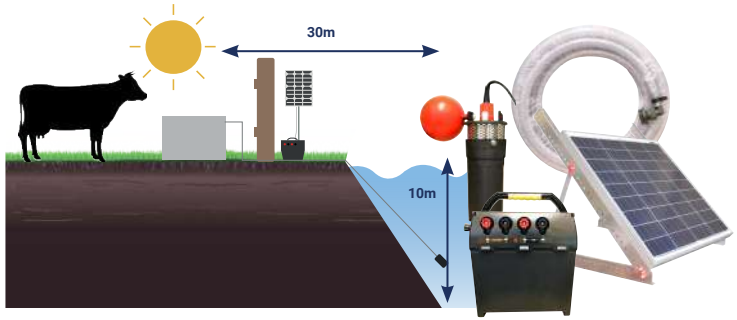




S1-200 Solar Powered Submersible Water Pump

S1-200 pump systems have market-leading efficiency, delivering more water for your off-grid application using only the power of the sun. You can pump more than 27,000 litres per day with one 200 Wp PV module. Motor and pump end are made of high quality materials for durability and reliability.

Why Use Solar Energy?

Solar energy is a free and abundant source of power that allows cost savings, and with your Lorentz solar powered water pump, you can generate your own electricity through solar PV modules, contribute to a sustainable future and irrigate your crops in a super eco friendly and cost saving way.

How does the Lorentz S1-200 solar pumping system work?

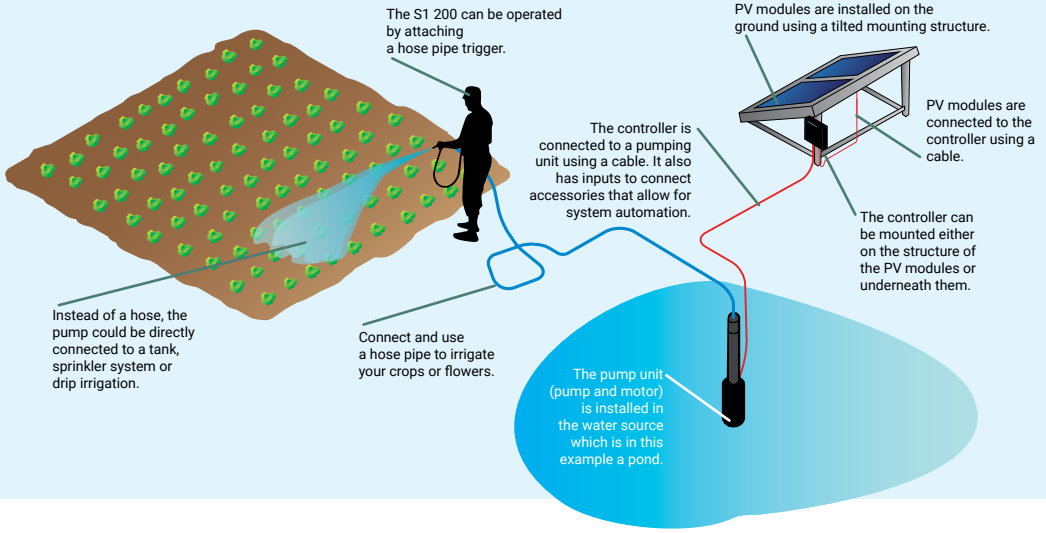

Harvest Products

We stock Twine / Netwrap / Stretch Wrap / Silage Sheets / Clingseal for all your spring harvest wrapping requirements.

Stretchwrap

- Renowned for unrivalled performance
- Reliable, strong and durable with consistent quality
- High track level and long life ensures trouble-free wrapping
- Suitable for round and square bales
- Excellent protection during long winter months of storage
- Highly recommended 6 layers used

total COVERIS™

Width (mm)	Length (m)	Thickness	Rolls (per pallet)
750	1500	25um	40
500	1800	25um	48
250	1800	25um	64



SILOTITE Pro

"The Contractors Choice"

- 30% more silage bales and no box
- Suitable for round baling
- Contractors tool to save you time and money

Width (mm)	Length (m)	Thickness	Rolls (per pallet)
750	1800	20um	40



VISQUEEN POLYCROP

Visqueen Polycrop is produced on modern co-extrusion blown film lines. By combining multiple separate layers of polythene into one high-strength film, this offers farmers and contractors a quality balewrap with a high oxygen barrier and excellent puncture resistance.

Width (mm)	Thickness (mm)	Length (m)	Pallet Dimensions (cm)	Reels per pallet (pcs)	Pallet Height (m)
250*	25	1800	108 x 108	64	±1.28
360*		1500	100 x125	80	±1.65
500*		1800	108 x 108	48	
750*		1500	100 x 125	49	



Netwrap



Width (mm)	Length (m)	Roll weight	Breaking strength	Pallet size
1230	3600	34.5kg	265kg - 270kg	28

piippo®



Piippo hybrid edge master is piippo's most popular netwrap due to its reliability, length and strength.

- Hybrid Edge Master is the strongest, longest and most light-weight bale netwrap
- The weaving and raw materials enable the longest roll possible
- High UV protection
- Keeps the bale together using 15–20% less netwrap than standard netwraps on the market
- Up to 500 bales (dia. 1.5 m; two layers) with a 4600-metre roll.
- The raw material composition makes it easy to cut the netwrap
- More meters, fewer rolls, less packaging waste, lower transport costs
- 0 % waste or by-products created in manufacture
- Contains a significant percentage of recycled material

Did You Know?

We also sell silage bale repair tape on p133.



Silage Sheets

All our sheets are manufactured using new techniques and improved raw polymer granules. This process is known for high strength, puncture resistance and excellent seal characteristics.

The innovative combination of Visqueen Agri-S and Visqueen Clingseal - a thin, flexible, low permeability sheet helps to create the right anaerobic conditions for fast, efficient fermentation.

In doing so it prevents pockets of trapped air forming to significantly reduce aerobic spoilage on the top and shoulders.

- Reduces air pockets
- Reduces losses in the clamp
- Facilitates a more efficient fermentation
- 100% recyclable




Sizes (m)	Weight (kg)
Visqueen Agri-S Standard	
4 x 50	19.1kg
8 x 25	19.2kg
8 x 50	38.5kg
11 x 25	26.3kg
12.8 x 36	44kg
11 x 42	44.1kg
14 x 30	40.3kg
16 x 30	45.9kg
16 x 40	61kg
18.3 x 25	43.5kg
Visqueen Agri-S Double Strength	
4 x 25	19kg
8 x 28	42.8kg
11 x 28	47.1kg
Visqueen Clingseal	
8 x 50	Thickness 40 microns
12 x 50	
16 x 50	





VISQUEEN 2IN1 AGRI-SYNERGY

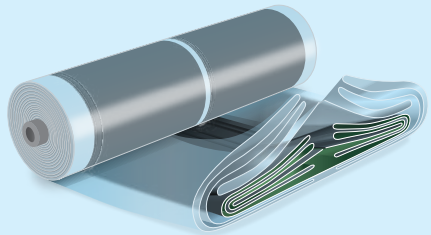

NEW FOR 2026!

2 IN 1 Silage Sheet

TWO GREAT PRODUCTS, ONE SIMPLE APPLICATION

PRODUCT OVERVIEW

Visqueen Agri-S Synergy combines Visqueen's high strength silage sheets and Clingseal vacuum sheets into one smart sheeting solution.The single application makes sheeting the clamp up twice as fast; simply unroll the sheet and open the folds.

- Two Sheets. One Application
- 50% Faster Application
- Reduced Surface Spoilage
- Dependable Protection




VISQUEEN® AGRI-SYNERGY 2IN1

NEW FOR 2026!

Two films on one roll makes the coverage of silage fast and efficient.

After being unrolled on to the silage, simply unfold the two films together in one single step.

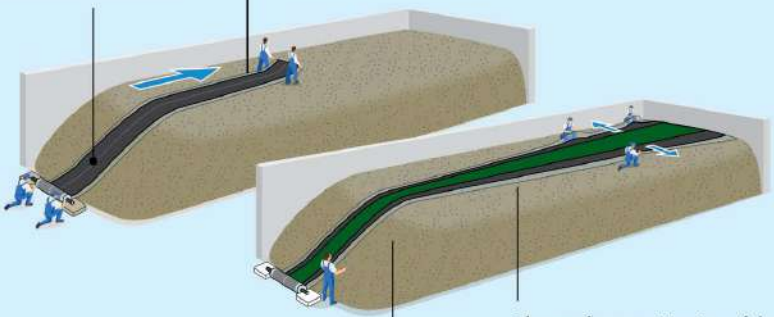

Instead of positioning two separate films, Visqueen® Agri-Synergy is already perfectly placed from the start.

The perfect positioning of the two films ensures a constant coverage and a better result for your silage.

Two Sheets One Application

50% faster application

Reduced surface spoilage

Dependable protection

Width (m)	Length (m)	Colour
12	42	Green/Black + Clear
16	30	Green/Black + Clear
18	30	Green/Black + Clear

NRP - Net Replacement Film

THE NETWRAP ALTERNATIVE FOR YOUR ROUND BALE SILAGE

COMPACT AND BETTER SHAPED BALE
With the high tensile force, Unterland Compact creates a tighter and more rounded shaped bale. This allows betterstacking and transport.

HIGHER PROTECTION AND DENSER BALE
The additional film layers of Unterland Compact will increase the mechanical protection on the round side of the bale which will greatly support the handling and storeage of the bales. Furthermore the oxygen barrier is much improved by theadditional film layers which will optimize the fermentation process and also assist in reducing the loss of fodder due to mould.

EASIER OPENING OF THE BALES
Remains of net in bales after opening can be avoided. Even the opening of frozen bales is more convenient.

SIMPLIFIED WASTE DISPOSAL
Because the Unterland Compact and all silage wrap films are made from the same material, there is no requirement for separation between film and netting on bale opening. Using Unterland Compact instead of netting will allow your bale protection films to be recycled together.

COVERIS™

- More compact and better shaped bales
- Higher protection and denser bales
- Easier opening of the bales
- Simplified waste disposal



ROLL WIDTHS	1280mm	1400mm
ROLL LENGTHS	1650m	
PACKAGING	15 reels per pallet	
COLOUR	Clear	White Tinted

VISQUEEN CROPTIGHT



APPLICATION	Width (mm)	Thickness (mm)	Length (m)	Reels per pallet (pcs)	Pallet Dimensions (cm)	Pallet Height (m)
Non-UV Stabilized						
SUGAR BEET / MAIZE	1280	13	2400	20	112 x 130	±1.10
SILAGE	1280	16	2000	20	112 x 130	±1.10
SILAGE	1380	16	2000	20	112 x 147	±1.10

Twine

Not sure which grade twine you need for this year's crop?

Use the helpful guide below and get this year's harvest in with ease.



International Baler Twine Segmentation

EXTREME
For High Density balers where ultimate performance is required. Use it for straw in conditions of extreme density or high temperatures, short straw and corn stalks.

VERY HIGH
Specially designed for use in balers in the 'EXTRA' high density sector, or when baling in more extreme conditions - high temperatures, low humidity or making bales of extreme density.



HIGH (Equivalent to Type 130)
The best performing option for all crops and balers where high density is required. Use it for silage and for high density hay and straw bales.

STANDARD
A standard big bale twine, suitable for use in all crops and normal baling conditions.

LOW
A twine suitable for use in any big baler, where only the lowest bale density is required, which also gives maximum spool length.

Recommended Wrap Guide

LOW	*STANDARD*	*HIGH*	*VERY HIGH*	*EXTREME*
	Equivalent to Type 150	Equivalent to Type 130		Impax UHD Impax HD
Tama LSB Max	Tama LSB Long	Tama LSB Power	Tama HD Extra	Tama HD Prime
		Tama LSB Power XL	Tama HD Extra XL	Tama HD Prime XL

Silage Accessories

Silage Netting



SS6000

While creating silage, it is essential to guarantee that the quality of the grass is preserved. The Silage Net is the most practical way to prevent birds and other wildlife from damaging polythene film, stretchwrap, or bags.

- 8m x 25m rolls
- 1 roll per pack

Silage Tape



SS7110

All weather durable silage tape. Ideal for silage clamp repair, silage bale repair, greenhouses, polytunnels and other polythene items.

- 75mm thick
- 33m long
- 48 rolls per pack

Silage Patches



SS7150

Specially designed for repairing silage bags and sheets. Highly adhesive to polythene and can be used for many other applications.

- 4" x 6" (96mm x 157mm x 33m) per roll
- Approx 210 patches per roll
- 24 rolls per pack

Silage Bags



- 2.235m x 3.054m x 100um
- 10 rolls per pack



Storage Tanks

Domestic & commercial

We stock a full range of storage tanks for both domestic and commercial use including; bunded oil storage, fuel dispensers, single skin tanks, water storage and sewage treatment plants/septic tanks.

DESO ENGINEERING



Bunded Oil Storage

Avoid large fines for spillage by conforming with a bunded tank. Deso tanks comply with the latest European standards and provide cost effective solutions to domestic, commercial and agricultural storage and dispensing requirements. Supplied with a 10 year manufacturer's guarantee.



Water Storage

Suitable for potable water storage and non potable rain water harvesting. Our selection of water tanks can hold up to 10,000 litres (2200 gallons).

Supplied with a two year manufacturer's guarantee.

Fuel Dispenser Pumps

Make your fuel delivery easier with a fuel pump station. Battery or mains available. The system contains a number of features, such as floatation gauge, particulate filter, auto shut off nozzle. Optional extras, longer hose and flow meter are available.



Single Skin Tanks

Constructed with the same high quality and care as Bunded Oil Storage Tanks, our Single Skin Storage is better suited for domestic usage. Available in various profiles and sizes.





Fuel Dispensers

Designed for easy access, our Fuel Dispensers are easy to install and come with the knowledge that they conform with latest regulations. Our range includes portable options and capacity varies from 430 to 5000 litres.



Treatment tanks

We can supply various off-mains drainage products and solutions to the domestic, civils/commercial, agricultural and leisure sectors. If you are looking for a sewage treatment plant, grease trap, storm attenuation, septic conversion tanks, we have the answer. Made in the UK. On site surveys and advice available.

Bunded Oil Storage

DESO ENGINEERING

Slim Line 1000 Litres (220 gallons)

OTD1005G



- Length: 1890mm (6 ‘3")
- Width: 645mm (2' 1")
- Height: 1340mm (4' 5")

Vertical 1340 Litres (295 gallons)

OTD1010G



- Width: 1410mm (4' 8")
- Height: 1531mm (4' 11")
- Footprint: 1390mm (4' 7")

Slim Line 1400 Litres (308 gallons)

OTD1007G



- Length: 2140mm (6' 11")
- Width: 660mm (2’ 1”)
- Height: 1695mm (5' 3")

1800 Litres (396 gallons)

OTD1013G



- Length: 1970mm (6’ 4")
- Width: 1350mm (4' 4")
- Height: 1510mm (4' 9")

V2455 Litres (540 gallons)

OTD1015G



- Width: 1700mm
- Height: 1730mm
- Footprint: 1670mm (5' 6")

2500 Litres (550 gallons)

OTD1025G



- Length: 2300mm (7' 5")
- Width: 1250mm (4' 1")
- Height: 1450mm (4' 7")

V3500 Litres (770 gallons)

OTD1018G



- Width: 2120mm (4’1")
- Height: 1600mm (5' 3")
- Footprint: 2075mm (6' 10")

Oil Tank Filter Assembly Kit



OTD2005

This filter assembly kit is a filter designed for heating oil tanks. The kit comes complete with everything that is required to quickly and simply install it.

- Oil filter complete with isolation valve
- 1” M BSPT x 1/2” M BSP conical fitting
- PTFE Tape
- Plastic pipe insert

Sonic Oil Level Monitor



OTD2000

The Kingspan Watchman Sonic Advanced is a revolutionary electronic measuring gauge that monitors how much oil there is left in your oil tank and sets off an alarm in your home in the event of a sudden drop in oil levels. This helps you to ensure that you never run out of oil.

- Optional upgrade to Watchman SENSiT, allowing you to get oil level notifications directly to your phone.
- One model fits all
- Quick and easy to install
- Audible alarm when oil levels run out
- Low power consumption

Single Skin Tanks

Our single skin tanks are ideal for domestic or small scale fuel storage

Slim Line 1220 Litres (268 gallons)

OTD1000



- Length: 2060mm (6' 9")
- Width: 660mm (2' 2")
- Height: 1120mm (3' 6")

1900 Litres (417 gallons)

OTD1290



- Length: 1850mm (6')
- Width: 1240mm (4' 1")
- Height: 1340mm (4' 5")

2500 Litres (550 gallons)

OTD1300



- Length: 1850mm (6')
- Width: 1240mm (4' 1")
- Height: 1340mm (4’ 3”)

Fuel Dispensers

Contract V1340 Litres (294 gallons)
OTD1043



- Diameter: 1390mm (4' 5")
- Height: 1740mm (5' 7")

Contract V2350 Litres (516 gallons)
OTD1046



- Diameter: 1710mm (5' 6")
- Height: 1900mm (6' 2")

V3500 Litres (770 gallons)
OTD1058



- Diameter: 2150mm (7')
- Height: 1885mm (6' 1")

H2500CDD Bunded Diesel Dispensing Tank (294 gallons)
OTD1057



- Length: 2300mm
- Width: 1250mm
- Height: 1450mm

H1550CDD Bunded Diesel Dispensing Tank (345 gallons)
OTD1044



- Length: 2000mm
- Width: 950mm
- Height: 1500mm

Each DESO dispenser pump comes with:

A 240v pump, a 4m delivery hose (3/4") with an automatic shut off nozzle, a 10 micron particulate filter, an overfill prevention valve clock type contents gauge.

V5000PDDFM Deso Fuel Dispenser - 5000L (1000 gallons)



- Diameter: 2480mm (8' 1")
- Height: 2000mm (6' 5")

V9400 Litres (2070 gallons)
OTD1064



- Length: 3150mm (10' 3")
- Width: 2490mm (8' 16")
- Height: 2960mm (9' 7")

Which size water tank do you need?

Calculating the size of a rainwater harvesting tank involves considering several factors, such as the average rainfall in your area, the surface area available for collecting rainwater, the intended use of the harvested water, and any specific requirements you may have. Here's a general approach to help you calculate the tank size:

1. Determine your water needs: Start by assessing how much water you need to store. Consider your household or specific usage requirements, such as gardening, irrigation, or toilet flushing. Calculate the average daily water consumption or the amount of water you want to collect during a specific period.

2. Determine the collection area: Next, determine the surface area available for collecting rainwater. This could be the roof area of your house, a garage, or any other structure that can efficiently capture rainfall. Measure the length and width of the collection area and multiply them to get the total collection area in square meters.

3. Determine the rainfall factor: Research the average rainfall in your area. You can obtain this information from local weather records or online databases such as the Met Office. The rainfall is usually measured in millimeters. Convert the rainfall value to the same unit as your collection area (e.g., millimeters to square meters).

4. Calculate the volume of water: Multiply the collection area by the rainfall factor to determine the volume of water that can be collected during a rain event. This will give you the amount of water in cubic meters.

5. Consider efficiency and storage capacity: Rainwater harvesting systems are not 100% efficient due to factors like evaporation, leaks, and system losses. To account for these inefficiencies, multiply the calculated volume of water by a factor between 0.5 and 0.9. This will give you an estimate of the effective volume of water you can expect to collect and store.

6. Calculate the amount of persons or animals usage

7. Select the tank size: Based on the effective volume of water calculated in the previous step, choose a tank size that can accommodate that amount. Rainwater tanks are available in various sizes and shapes. Consider factors like available space, budget, and any local regulations or restrictions on tank sizes.

It's important to note that this is a general approach to help you estimate the tank size. You may need to adjust the calculations based on specific factors in your situation. Additionally, it's recommended to consult with local experts or rainwater harvesting professionals who can provide more accurate guidance based on your location and specific needs.



Sewage Treatment Tanks

Sewage Treatment Plant

OT6025 4 PERSONS
OT6030 6 PERSONS



- Tested to BSEN12566:3
- CE-marked to ensure compliance with latest environmental and Building Regulations requirements
- Three chamber system correctly sized for separation and retention of solids improves final effluent quality

4 Person
- 1600mm (L) x 1332mm (W) x 1575 (H)

6 person
- 2602mm (L) x 1650mm (W) x 1935 (H)

Capacity	Code
4 person	OT6025
6 person	OT6030

Larger sizes available

Septic Tank

- Tested to BSEN12566 1
- CE-marked to ensure compliance with latest environmental and Building Regulations requirements

OT6010
2800L (600 gallons)
- Diameter - 1870mm
- Height - 2780mm

OT6020
3800L (835.88 gallons)
- Diameter - 2075mm
- Height - 3000mm

OT6023
4500L (989.88 gallons)
- Diameter - 2196mm
- Height - 3100mm



Capacity	Code
2800L	OT6010
3800L	OT6020
4500L	OT6023



Marsh Ensign is widely regarded as one of the most efficient, reliable and economical sewage treatment plants on the market

Site visits available on request


Click link to view full product range and installation details



Sewage treatment systems, what are your options?

Choosing the right sewage treatment and disposal method for your site is essential to ensure effective long-term performance, protection of public health and the environment, and compliance with relevant legislation. Sewage treatment and disposal can be provided by either public (foul) sewer or by a private sewage system. Use of a private system is only usually acceptable where connection to the public sewer is not possible, and as such should be discussed with your local Planning Authority at an early stage. Before sewage effluent can be discharged to 'controlled waters' it must receive at least primary and secondary treatment:

- ***For a discharge to ground the micro-organisms in the soil provide the secondary treatment***
- ***For a discharge to a water course the sewage treatment must be provided by a Package Sewage Treatment Plant (PSTP) or equivalent***

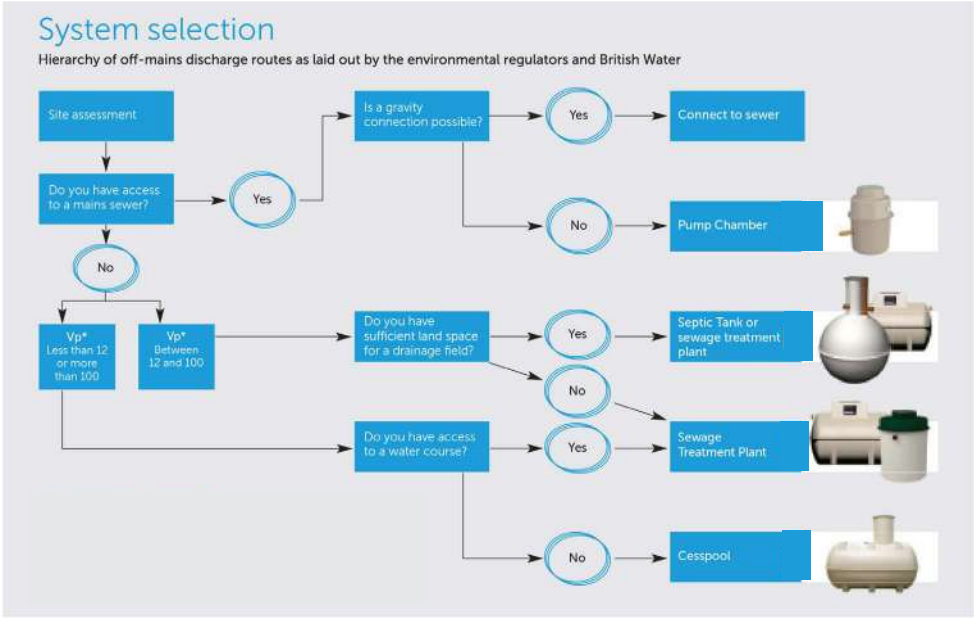



Water & Drainage

Water solutions for the farm and field

Drainage is of paramount importance to alleviate water-logged fields, lawns and gardens. Our products are suitable for domestic and commercial use so you can ensure that your land is protected from unexpected water leaks.

PLASSON®
Flow Solutions



Twinwall Pipes

A new generation of HDPE, this 6m long high performance twinwall pipe is designed for use with all non-pressure, surface and sub-surface storm water drainage applications.

MDPE Pipes

MDPE 20mm pipe has replaced the old black 1/2" class C & D pipe. 25mm has replaced the old black 3/4" class C & D pipe and 32mm has replaced the old black 1" class C & D pipe. All sizes are available in 25m, 50m, 100m, and 150m coils. Universally accepted as an established alternative to ductile iron and UPVC pipes.





Flexible Land Drainage Pipes

Plastic land drainage pipe is a modern replacement for clay pipes and has been universally and effectively used for over thirty years. This product is available in perforated and non-perforated options and in a range of sizes.



Water Pipe Fittings

WRAS approved water pipe fittings. We stock a wide range of water pipe fittings. From ball valves to stop tap chambers, Tees, elbows and couplers to non return valves and more, we can solve your burst pipe in a hurry.

Ball Valve and Stop Taps

When water temperature drops below 0°c and turns to ice it can increase pressure and break traditional valves. The arctic resistant valve has been designed to absorb the increased water pressure during colder temperatures.





Universal Fittings

ideal for emergency repairs, Plass4 connects metric polyethylene to other pipe materials. Plass4 is easy to use with no specialist tools needed to complete the joint.

Plasson Emergency Repair Kits

Let's face it, burst pipes happen... often needing a quick and affordable solution to get things fixed, preserving your precious water supply.

Plasson offer a range of clever products to solve your water leak problems.



Did You Know?

We also stock all the fittings required for water trough installations, stop-tap chambers, concrete trough supports, non return valves, stop taps, ball valves, pipe and fittings.

Be WRAS & Water Board Compliant

BLACK 2 BLUE™ BLACK 2 BLACK™

A Must Have For Every Tool Kit

BLACK 2 BLUE - Imperial pipe connecting to metric PE: 1 fitting, no insert on imperial pipe, liner only required for metric pipe.

BLACK 2 BLACK - Imperial pipe, Class C & D, low and high density: 1 fitting, no insert, no liners.

WRAS APPROVED PRODUCT



Click the link
water trough install guide

KEY FEATURES

- Assembly tools not required.
- No inserts needed.
- Seal is made when pipe inserted.
- Doesn't restrict flow or risk blockage.
- No need to disassemble.
- Easy to re-use.
- 50 year design life.

Click link above to view full product range




MDPE Water Pipe

Commonly known as alkathene pipe, 20mm has replaced the old black 1/2" class C & D pipe, 25mm has replaced the old black 3/4" class C & D pipe and 32mm has replaced the old black 1" class C & D pipe. All sizes are available in 25m, 50m, 100m, and 150m coils.

Universally accepted as an established alternative to ductile iron and UPVC pipes.


Stocked in blue - Black also available






- Pipe Size - 20mm
- Average bore I.D. dia - 15.2mm
- Average wall thickness - 2.4mm
- Average weight per Mtr - 0.13kg

20mm	
Coil Length	Code
25m	PPBU20025
50m	PPBU20050
100m	PPBU20100
150m	PPBU20150



- Pipe Size - 25mm
- Average bore I.D. dia - 20.1mm
- Average wall thickness - 2.5mm
- Average weight per Mtr - 0.16kg

25mm	
Coil Length	Code
25m	PPBU25025
50m	PPBU25050
100m	PPBU25100
150m	PPBU25150



- Pipe Size - 32mm
- Average bore I.D. dia - 25.8mm
- Average wall thickness - 3.1mm
- Average weight per Mtr - 0.27kg

32mm	
Coil Length	Code
25m	PPBU32025
50m	PPBU32050
100m	PPBU32100
150m	PPBU32150

PLASSON Flow Solutions

MDPE Water Pipe Clip

A heavy-duty Plasson clip designed to hold MDPE water pipes securely.



Item	Gauge	Code
Plasson MDPE Blue Pipe Clip	20mm	PHP5306
	25mm	PHP5307
	32mm	PHP5308

Plastic Land Drainage (Flexi-Pipe)



Plastic land drainage pipe is a modern replacement for clay pipes and has been universally and effectively used for over thirty years.

Perforated and non-perforated options are available, in a range of pipe diameters, 60-160mm.

Perforated land drainage
- Principally used to alleviate water logged fields, lawns and gardens.
- The plastic drain is laid in a permeable stone enclosure allowing the water to filter through to the plastic pipe which then directs the water to the designated outlet.

Non-perforated land drainage
- Commonly used under gateways or when filling in a ditch.

***Please note** — Various sizes available, dependent on the severity of the problem. Membrane sleeves can be added to the pipe particularly for fine soil types to prevent pipe blockage.*








Benefits
- Strong and flexible
- Fast installation
- Provides excellent water flow
- Kitemarked to BS 4962:1989, License No. KM557607
- Manufactured from high quality RHDPE
- Tightly wound coils that enables easy stacking and handling


AGRI


RIDING ARENAS


SPORTS


CIVILS

Twinwall Pipe Lengths



A new generation of HDPE, this 6m long high performance twinwall pipe is designed for use with all non-pressure, surface and sub-surface storm water drainage applications.

Twinwall pipe is made by a twin extrusion process, which forms two pipes and heat welds them together as they are formed. It features a smooth bore for superior hydraulic flow and corrugated outer wall for additional strength.

Perforated and non-perforated options, in a range of pipe diameters from 94mm/110mm - 589mm/676mm (ID/OD). Half perforated available on special request.

Why Twinwall?
- 50+ year life span
- High strength and durability
- Can easily be cut to required lengths on site
- Lightweight – easier transport, handling and installation
- Saves machinery and labour costs as installation is quicker
- Weighs less than 6% of equivalent size concrete pipes
- Minimal jointing compared with traditional materials
- Provides a faster flow meaning it is more likely to keep itself cleaner than single wall pipe


Inside Diameter (ID)	Outside Diameter (OD)	Length (m)	Finish	Code
94mm	110mm	6m	Perforated	LDPTW22
			Non-perforated	LDPTW20
150mm	180mm	6m	Perforated	LDPTW00
			Non-perforated	LDPTW01
225mm	266mm	6m	Perforated	LDPTW10
			Non-perforated	LDPTW15
300mm	354mm	6m	Perforated	LDPTW02
			Non-perforated	LDPTW1
450mm	511mm	6m	Perforated	LDPTW30
			Non-perforated	LDPTW35
600mm	676mm	6m	Non-perforated	LDPTW40



Twinwall half perforated available by special order



AGRI
- Perfect for many agricultural, construction and civil engineering projects



SPORTS
- Ideal for golf course & sports field drainage
- Can also be used in the construction of under pitch heating




CIVILS
- Can be used in landfill applications for leachate drainage and methane gas control






Twinwall & Flexible Drainage Ducting

Twinwall Pipe - Standard Diameter

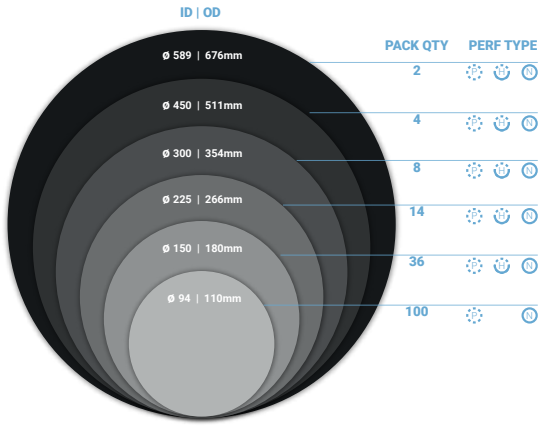

Stock item

Twinwall Pipe - Large Diameter SUPPLIED TO SPECIAL ORDER

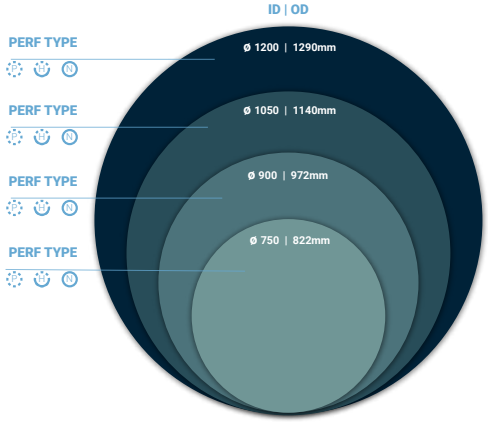


• WRC Certified

Special order item

PACKS SOLD IN INDIVIDUAL LENGTHS


FILTER DRAIN | PERFORATED	P
HALF FILTER DRAIN | HALF PERFORATED	H
CARRIER DRAIN | NON-PERFORATED	N

Flexible Drainage Pipe

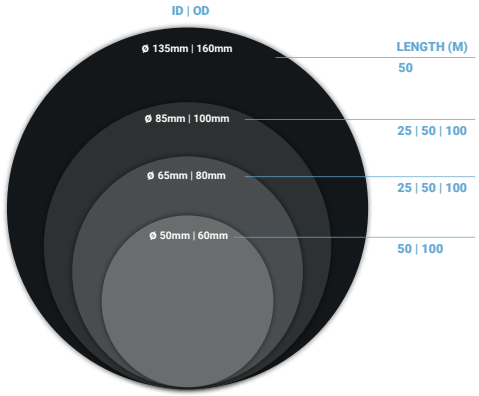

Inside Diameter (ID)	Outside Diameter (OD)	Length (m)	Finish	Code
135mm	160mm	50m	Perforated	LDP164
			Non-perforated	LDP160
85mm	100mm	25m	Perforated	LDP101
		50m	Non-perforated	LDP106
		100m	Perforated	LDP100
			Non-perforated	LDP105
65mm	80mm	25m	Perforated	LDP081
		50m	Perforated	LDP082
		100m	Perforated	LDP080
			Non-perforated	LDP085
50mm	60mm	50m	Perforated	LDP062
		150m	Perforated	LDP060
			Non-perforated	LDP061

Flexible Black Ducting c/w Draw String

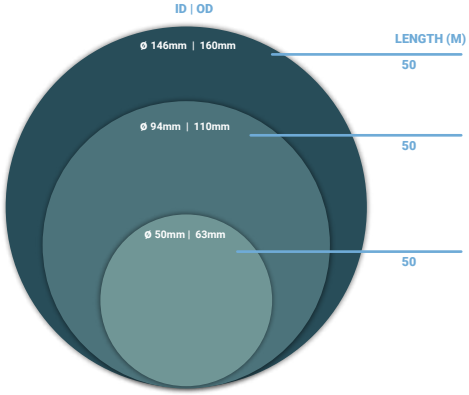

Inside Diameter (ID)	Outside Diameter (OD)	Length (m)	Finish	Code
46mm	60mm	0m	Non-perforated	LDP075
4mm	10mm	50m	Non-perforated	LDP070
0mm	63mm	50m	Non-perforated	LDP065



Visit our Website!

Still haven't found what you're looking for?

Then no worries, either click one of our links throughout this brochure or go to **mcveighparker.com** and check out our whole product range. Our experienced and helpful sales staff look forward to dealing with your request very soon.

NEED MORE INFO?
Use our spec sheets to find out more



Stop Taps

PLASSON Flow Solutions

Arctic Ice Bib Cock Lever Handle



Pipe Size	Code
½" BSP	PH1040
¾" BSP	PH1045

- Resistant to damage caused by ice inside fitting
- Elastic polypropylene copolymer body absorbs expansion from freezing water
- Connects via BSP thread

Bib Cock Lever Handle



Pipe Size	Code
½" BSP	PH1020
¾" BSP	PH1030

- Quality bib cock
- Fast and simple to install
- 1/4 turn leaver handle
- Connects via BSP thread

Water Pipe Joiner Fittings

- **ALL Suitable for MDPE and HDPE pipe**
- **ALL available in 3 different sizes - 20mm, 25mm, 32mm**

Joiner Pol x Pol



Pipe Size	Code
20mm	PHP7122
25mm	PHP7133
32mm	PHP7144

Tee-Equal Joiner Pol x Pol x Pol



Pipe Size	Code
20mm	PHP7322
25mm	PHP7333
32mm	PHP7344

Elbow Joiner Pol x Pol



Pipe Size	Code
20mm	PHP7522
25mm	PHP7533
32mm	PHP7544

Elbow Joiner Pol x F1



Pipe Size	Code
20mm x ½"	PHP7621
25mm x ½"	PHP7644
25mm x ¾"	PHP7632
32mm x 1"	PHP7643

Universal Slip Repair Coupler



Pipe Size	Code
19-22mm	PHP1055
24-28mm	PHP1056
31-35mm	PHP1057
40-43mm	PHP1058
48-51mm	PHP1059
60-64mm	PHP1060

End Plug



Pipe Size	Code
20mm	PHP7128
25mm	PHP7138
32mm	PHP7148

Reducing Joiner



Pipe Size	Code
25mm	PHP7132
32mm	PHP7143

Joiner Liner



Pipe Size	Code
20mm	PHP7002
25mm	PHP7003
32mm	PHP7004

Not yet found the pipe fitting you need?
Contact your nearest branch

Ducting Fittings and Accessories

Multi Branch



Sizes (mm)
60 - 100

Maxi Branch



Sizes (mm)
100 - 160

Connectors



Sizes (mm)
60 | 80 | 100 | 160

Reducers



Sizes (mm)
100 - 60

Twinwall Fittings and Accessories

Coupler



Sizes (mm)
100 | 150 | 225 | 300 | 450 | 600

Tee Junction



Angle	Sizes
90°	110-1200

Y Junction



Angle	Sizes
45°	110-1200

Bends



Angle	Sizes
15, 30, 45, 90°	110-1200

Reducers



Sizes
110-1200

Seals



Sizes (mm)
100 |150 | 225 | 300 | 450 | 600
IDEAL FOR CARRIER DRAINS

End caps



Sizes (mm)
110-1200

Lateral Connectors



Sizes (mm)
110-150

Twinwall - Adapters



Various Sizes available

Twinwall - Land Drainage Fitting



Various Sizes available

Don't forget to add Couplers & Seals!



Landscaping & Roofing

Make your outside space that little bit more special

Our landscaping options includes a selection of ground protection, sleepers, roofing and products to enhance your garden. We also have temporary netting solutions available to keep your project secure whilst it is under construction.

Onduline



Sleepers

Available in green oak and hardwood our quality sleepers are suitable for an array of projects from soil retention to raised beds.



Path Edging & Membrane Pins

Designed by landscape architects the award winning system is the perfect way to achieve straight, cornered and enviable curves and shapes in your landscaping project.

Ground Protection

Our range of ground protection includes woven and non woven geotextile membrane. It is available in a range of sizes and grass protection solutions, all of which are suited to areas that receive heavy traffic including pedestrian and agricultural footfall.



Garden Design

Add the finishing touch to your project with one of our garden planters or traditional picnic benches. Our planters are made from galvanised steel (beware inferior alternatives) and our picnic benches provide a rustic option for alfresco dining.





Netting

For a quick, economic and effective solution, netting is useful in deterring access to your land from unwanted visitors (both human and animal!) Shop our range of plastic netting now.



Roofing

Once you have completed your work, you want to ensure that it is fully protected from the elements. Our range of roofing solutions includes the popular Onduline Roofing, an extremely tough yet lightweight material with unrivalled versatility as a roofing or wall-cladding option.

Sleepers

Reclaimed Hardwood Railway Sleepers

F6090



- Grade A traditional reclaimed railway sleepers
- Approx. 2448mm x 250mm x 150mm

Green Oak Sleeper

F6085



- New green oak sleepers
- 2400mm x 200mm x 100mm

Pressure Treated Softwood Sleeper

F6095



- Pressure treated softwood
- Longer maintenance free life
- 2400mm x 200mm x 100mm

Sleeper & Gravel Board Support Spike

F6251

The sleeper pin offers a convenient and straight forward system for mounting timber railway sleepers in various garden projects.



- 440mm height
- Pre-galvanised for finish and durability

Did You Know?



We also sell landscape screws page 180

Plywood Sheets




- Perfect for a huge range of roofing & building uses
- 2440mm x 1220mm Plywood sheets
- Available in 12mm and 18mm thickness
- Hardwood face

Length	Code
Plywood 2440 x 1220 x 12mm	F6050
Plywood 2440 x 1220 x 18mm	F6055

Ground Protection

Grass Protection Mesh

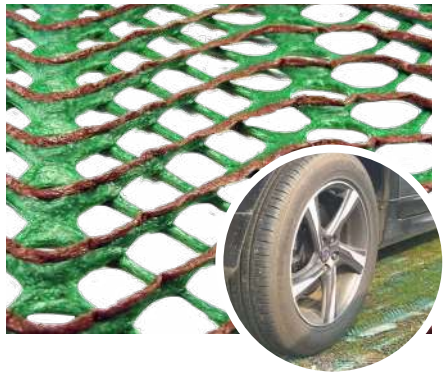

F6085

- GP-Flex is the new generation grass protection mesh
- Features a slip resistant surface and more flexible profile
- Available in 3 different grades
- Roll size - 2m x 20m
- Slip resistant surface

Weight	Size	Code
1000g	2m x 20m	NET293
1400g		NET294
1800g		NET292

Permeable Plastic Pavers



NET295

- Suitable for very heavy duty applications
- Used for overspill carparks, driveways and shed bases
- Each paver 330 x 330 x 40mm, 9 pavers per m2
- Interlocking plastic grid paving system
- 330 x 330 x 40mm
- Load bearing: 250 - 350 tonnes/m2 on a correctly specified and compacted sub-base





For full details check out the Pavers spec sheet, click the left link

Did You Know?



We also sell J & U pin path edging, see page 174

Geotextile Membrane

Non-Woven Geotextile Membrane



Length	Code
4.5m x 100m (standard)	LDP720
4.5m x 100m (Premium)	LDP726

- Ideal for the separation of granular layers and ground reinforcement
- CBR puncture resistance (N)
- Water permeability (m/sec)

Woven Geotextile Membrane



Length	Code
4.5m x 10m	LDP710
4.5m x 100m	LDP700

- Ideal for weed suppression and ground stabilisation
- Higher strength and lower permeability
- Two different roll sizes

Silt Fence Membrane

Protect your site and surrounding environment with Silt Fence, a high-performance temporary erosion control barrier.

- Controls sediment movement during groundworks and earthworks
- Porous woven fabric allows water filtration while retaining soil
- UV-stabilised for reliable outdoor performance
- Helps protect waterways, drainage channels and surrounding land
- Reusable and repositionable throughout the project lifecycle








Barrier Safety Netting

NET001



NET002



- Size: 1m x 50m
- High visibility mesh
- Erect using steel fencing pins available separately
- Available in orange and blue



Barrier Netting Support Pins available on request

Chestnut Paling

Our Paling Fencing, a classic and versatile fencing solution designed to cater to all your fencing needs. Manufactured from coppiced woodland, this fencing product showcases the perfect combination of durability, flexibility, and ease of installation.

The wood is skilfully split into pales, and galvanized wire is intricately woven between them, ensuring exceptional strength and longevity.



Size	Code
900mm Paling Fence 3 Line - 9.1m Roll	F4201
900mm Paling Fence 2 Line - 9.1m Roll	F4200
1200mm Paling Fence 3 Line - 9.1m Roll	F4205
1200mm Paling Fence 2 Line - 9.1m Roll	F4204

Size	Code
1400mm Paling Fence 3 Line - 9.1m Roll	F4206
1500mm Paling Fence 3 Line - 4.55m Roll	F4207
1800mm Paling Fence 3 Line - 4.55m Roll	F4207

Coppiced & Made In England

Path Edging Solutions

Rite Edge Path Edging

- An extremely versatile and easy to install thanks to its telescopic joining system, allowing you to create straight lines or beautiful curves with ease.
- Manufactured from aircraft grade aluminium, designed to last a minimum of 27 years, it requires no maintenance and will not rust or rot.
- Additional features include a safe rolled top edge.
- Available in a range of colours to suit all projects
- Treated timber 3600 x 100 x 22mm



Timber Path Edging

F6248

Path edging is the perfect way to add both practicality and aesthetic appeal to your outdoor spaces. Whether you're looking to define garden pathways, create clean borders around flowerbeds, or maintain the integrity of your walkways, path edging offers a versatile solution.



- A cheaper alternative to the Rite Edge system
- 3600 x 100 x 22mm

Bench & Tables

Corfe Traditional Picnic Table

F6505



- Table top 1.75m (L) x 740mm (W) x 40mm thick.
- Main frame 90mm x 40mm.
- Assembled size 1.75m (L) x 1.5m (W) x 810mm (H)

Warwick Circular Picnic Table

F6500



- Main frame 90mm x 40mm
- Height assembled 810mm

Trough Planters



Descript.	Dimensions	Capacity	Code
Trough Standard	600x457x405mm	109 litres	WT02
	900x457x405mm	163 litres	WT03
	1200x457x405mm	218 litres	WT04
	1500x457x405mm	272 litres	WT05
	1800x457x405mm	327 litres	WT06
	2400x457x405mm	436 litres	WT08
Trough Galvanized	1200x600x600mm	454 litres	WT204
	1800x600x600mm	681 litres	WT206
	2400x600x600mm	980 litres	WT208
	3000x600x600mm	1135 litres	WT210
Lower Trough	1200x457x267mm	136 litres	WT404
	1800x457x267mm	204 litres	WT406





** All planters come with drain plugs*



Concrete supports are extra, see P122

Did You Know?

Whatever project you are undertaking, industrial, agricultural or domestic, we have the tools and fixings you need to ensure you get the job done.


Check out our tools and fittings section from page 160 to 186.



Roofing

Onduline

Onduline Roofing

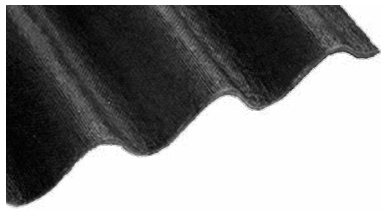



- Sheet size : 2000mm x 950mm x 3.0mm thick
- Cover width: 855mm
- Corrugation: 38mm high x 95mm width
- Weight: 6.4kg

Colour	Size	Nail Code
Black	2000mm (L) x 950mm (W) x 3.0mm thick	RS300
Green		RS305
Red		RS307
Brown		RS309

Onduline Nails

RS325 (Black)



- Nail length including cap: 73mm
- Nail penetration length: 65mm.

Bags of (400) per 20 sheets

Onduline Ridge

RS310




- Cover width: 775mm
- Weight: 1.2kg

Colour	Size	Code
Black	2000mm (L) x 485mm (W) x 2.9mm thick	RS310
Green		RS315
Red		RS317

Onduline Translucent PVC Sheet

RS318

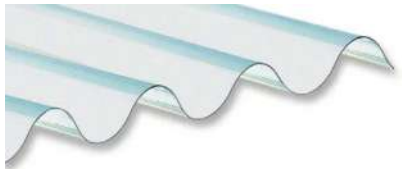

- Sheet size: 2000mm x 950mm x 3.0mm thick
- Cover width: 855mm
- Corrugation: 38mm x 95mm
- Weight per sheet: 6.4kg

Box Tin Roofing

Available on request

Corrugated Galv Sheeting



Description	Code
1800mmx14/3x24kg galv corrugated sheet	RS106
2100mmx14/3x24kg galv corrugated sheet	RS107
2400mmx14/3x24kg galv corrugated sheet	RS108
3000mmx14/3x24kg galv corrugated sheet	RS110
3300mmx14/3x24kg galv corrugated sheet	RS111
3600mmx14/3x24kg galv corrugated sheet	RS112
4200mmx14/3x24kg galv corrugated sheet	RS114

Click the link to view full product range



Tools & Fixings

For industrial, agricultural & domestic use

Whatever project you are undertaking, industrial, agricultural or domestic, we have the tools and fixings you need to ensure you get the job done from many great tool brands

GRIPPLE · Strainrite FENCING SYSTEMS · Milwaukee



Tensioning

Suited for horse or deer stock fencing and netting. Our range of tensioning tools has all you need. Products include a selection of innovative Gripple tensioning products, boundary clamps, wire chain strainers, wire pullers and more.



Fixings

We have a comprehensive range of netting clips and other fixings for fence erection and much more. Our stapling range helps you to make a quick job of stock fencing. The range includes battery powered staplers.

Cutting & Joining

Our innovative cutting and joining products help make easy work of wire cutting and joining your fence line with popular products including our Knipex wire cutters, Strainrite Crimps Sleeves and Gripple wire joiners.



Digging

Our range includes all your essentials, including post hole diggers, chisels and points as well as a selection of shovels. We also stock a wide range of insulated tools which conform to BS8020:2011 and are flash tested to 10,000 volts to ensure safe working practice.





Striking

Sometimes you need to pack some power to get the job done. Our striking tools are perfect for making an impact when you need to get deep. We have sledgehammers, shock hammers, petrol driven post drivers and log splitting tools.




Other Tools

Aptly named ‘other tools’ this category contains our range of wheelbarrows, tarpaulins, spinning jenny wire dispensers and more.


GRIPPLE Fence Kit

As market leader in the joining and tensioning of wire, Gripple is renowned for providing innovative, cost-effective solutions for wire fencing applications. Our products work with a wide variety of mild and tensile fencing wires - across barbed and plain fencing types, and on anything from stock to electric fencing, replacing traditional methods and generating time and labour savings.

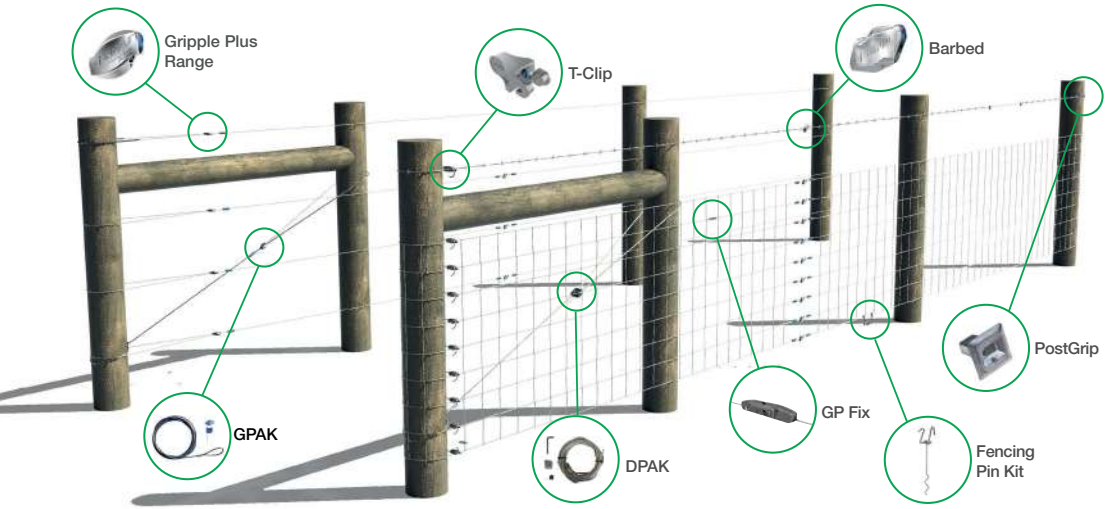


GRIPPLE Orchard Kit

Our range of orchard trellising products have been specifically developed to help with heavy fruit loads. Gripple's range is suitable for orchards in a variety of terrains and soil types.

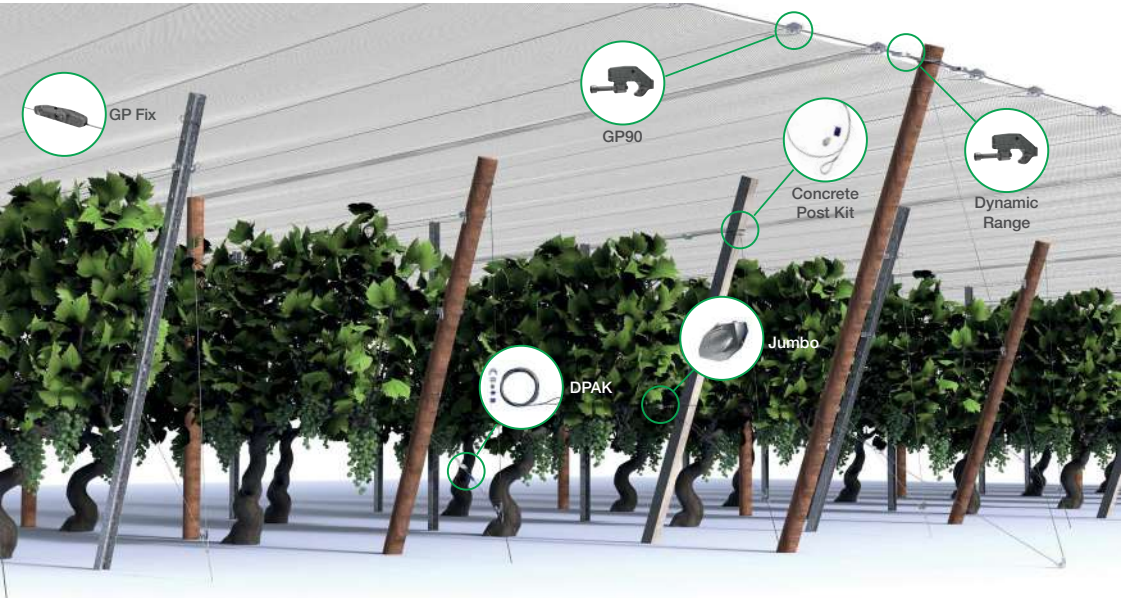

GRIPPLE Vineyard Kit

In today's vineyards, the wires, posts, and machinery used are constantly being improved, and Gripple prides itself on being part of that evolution. The Gripple Plus product range, along with the Torq Tensioning Tool and Contractor Tool, not only provides a trellising system that can be tensioned in seconds, but one that will last for decades.

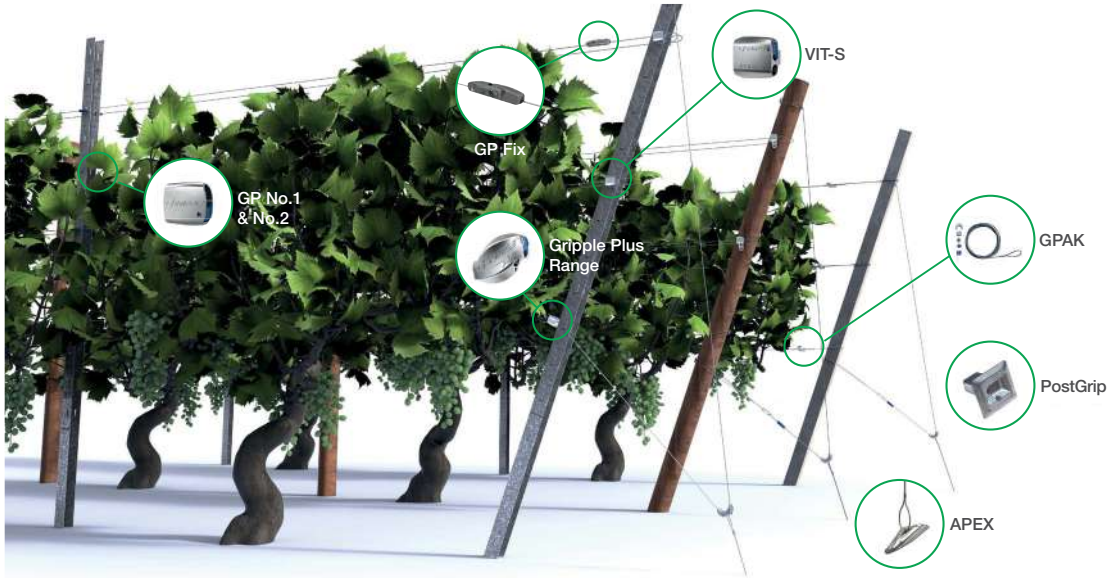

Tensioning Tools

Gripple Contractor Tool
A1518



The Contractor Tool is stronger and more robust than ever before, producing the same tension with much less effort. From the people behind the revolutionary Gripple range of wire joiners and tensioners, the new tool was developed through intensive research out in the field.

- 10:1 mechanical advantage, meaning you can apply the same tension with a lot less effort.
- All steel handles

Gripple Tensioning Tool
A1510



The Gripple Torq Tensioning Tool not only tensions wire but regulates the load applied too, delivering consistent results and maximising the life of your wire.

- Allows tensioning of wire up to 400 kg
- Minimal effort due to the 6:1 gear drive mechanism

GRIPPLE®

Agriculture, Fencing & Equipment

Market-leading wire joiners and tensioners which simplify installation, maintenance and repair across a range of applications.



The Gripple Barbed High Tensile joiner has been intentionally designed to grip the unique shape of barbed wire.

Stronger than a traditional knot

Up to 16% stronger than a traditional wire knot.

Designed for high tensile wire

New patented technology specifically designed for use with high tensile barbed wire.

Long lasting

Made from corrosion resistant materials, designed to outlast your fence.

Easy to install

Join or repair high tensile barbed wire in seconds with audible engagement for added confidence.

Compatible with

Use with 1.57 mm to 2 mm wire (2 x 15.5 swg - 2x 14 swg).

It is fast to install, simple to use, and thanks to the new corrosion resistant ceramic wedge, you can walk away with the confidence that your wire joint will last as long as your fence.

Compatible with all wire sizes from 1.57 mm – 2.00 mm (2 x 15.5 swg - 2 x 14 swg), the new Barbed High Tensile joiner is ideal for installation or fencing repair.

GRIPPLE®

Tensioning

Gripple Post Grips

A1557B

- Packs of 10
- End vice tensioner for wooden post
- Suitable for 2.00mm- 3.15mm wire







Create a clean, professional finish and protect people and animals from sharp wire tails with the Gripple PostGrip. Ideal for terminating wire fencing at wooden end posts.

Gripple Wire Joiners

Size	Description	Code	
Small 20 per bag	Used to join plain wire and install lightweight stock netting.	A1512B	
Medium 20 per bag	Used as an in-line joiner or as an end anchor for stock fencing, high tensile barbed wire and plain wire.	A1520B	
Large 20 per bag	Used as an in-line joiner or as an end anchor for stock fencing and plain wire.	A1535B	
Jumbo 20 per bag	Used as an in-line joiner or as an end anchor for stock fencing, fruit trellising and plain wire.	A1540B	
Barbed 20 per bag	Specifically designed to grip the unique undulating shape of barbed wire.	A1530B A1531B	

Gripple T-Clips

Size	Code	
Normal 20 per bag	A1525B	
Barbed 20 per bag	A1527B	

Gripple Twister Pack

Size	Features	Code	
Normal 20 per bag	• Use on 2.00 - 3.25mm wire • 35mm long • UV treated for longevity • Packs of 100.	A1550	

Medium Joiners and T Clips available in tubs of 400 and 300

Gripple GPAK 3

A1565

- Includes one medium Gripple
- 3mm wire rope x 4.5m long, 400kg load



Gripple GPAK 4

A1570

- Includes one large Gripple
- 4mm wire rope x 5.0m long, 600kg load



Gripple APEX™ Anchor

A1560



- Anchor 3 - Wire rope 3.0mm
- Wire length 1.5m
- Time and labour saving – quick to install
- Minimal ground disturbance
- Suitable for a variety of soil types
- Instant load holding

Gripple Drive Tool

A1562

- Used to drive in the Gripple Anchors, GPAK 4 & GPAK 3
- 1.8m and 1.5m long machined steel 24mm dia
- Strong Diager Drive Tool comes with carbide tip



GRIPPLE Fencing Kits

GRIPPLE

FENCE & GO STARTER KIT

Everything you need to get wire fencing up and running.

The Fence and Go Starter Kit includes:



20 Gripple Plus Medium joiners, 20 T-Clips, and our Torq Tensioning Tool, giving you a complete system for joining and tensioning wire straight out of the box.

The Gripple Starter Kit, a fast, efficient and neat way to join and tension wires. Ideal for new fencing projects, reinstating or repairing broken or old fencing, trellising or plant support.

GRIPPLE

FENCE & GO CONTRACTOR KIT

Everything you need to get wire fencing up and running.

The Fence and Go Contractor Kit includes:



20 Gripple Plus Medium joiners, 20 T-Clips, and our Contractor Tool, giving you a complete system for joining and tensioning wire straight out of the box.


The Gripple Contractor Kit is the ultimate all in one solution for efficient wire joining and tensioning in fencing and trellising applications. Designed with contractors in mind, this kit combines high performance components with portability and ease of use, making it ideal for agricultural, landscaping and construction professionals.

Strainrite FENCING SYSTEMS

A leading manufacturer & exporter of quality tools and fencing equipment.

Offering a variety of tools and equipment in the field by farmers for farmers. McVeigh Parker are proud to be European wholesalers and retailers of this quality range of products.

Post Foot Strainer

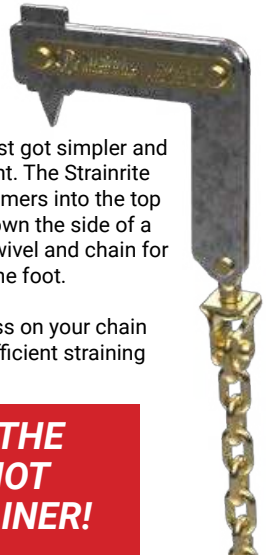

Straining a post foot just got simpler and safer on your equipment. The Strainrite Post Foot Strainer hammers into the top of the post and runs down the side of a post, positioning the swivel and chain for a direct, inline pull on the foot.

No offset load, no stress on your chain strainer — just clean, efficient straining every time.

STRAIN THE FOOT, NOT THE STRAINER!

DIRECT INLINE PULL
Swivel and chain positioning ensures a straight pull on the foot, eliminating offset load on your chain strainer.

PROTECT YOUR EQUIPMENT
Designed to strain efficiently without putting damaging stress on your chain strainer.

SIMPLE TO USE
Hammers into the top of the post and sits flush down the side — quick to set up, easy to remove.

SWIVEL AND CHAIN INCLUDED
Ready to connect straight to your chain strainer right out of the box.

GALVANISED STEEL CONSTRUCTION
Long-lasting corrosion resistance for reliable performance in New Zealand conditions.

PROUDLY NEW ZEALAND MADE
Designed and built in-house to the same high-quality standard as every Strainrite product.

Quik-End Clip

Is an easy termination solution. Doing away with end knots and improve the strength of your fence at the same time.

Faster than tying off a knot and great value, these clips will save time and money while increasing the strength of your fence.

FEATURES

- Reduce installation time
- Quick, fast and easy to install
- Ideal for fabricated netting, especially Otter and horse netting
- Provides uniform straining position, every time
- Pre-formed loop & knot
- Ability to thread onto wire = fewer joins



- Cost-effective & convenient to use
- No knots are required whatsoever
- Maximum working pressure load 340kg
- 2.50mm spring steel and heavy galvanised finish
- 100 Per Pack

Official wholesaler of

PROCRIMP F3020 Powered Crimping Tool

Can be used with various Strainrite crimp sleeve sizes upto 4mm

Click the link to view full product details.



FEATURES

- *Light, compact and easy to handle*
- *Fast jaw action allows repeat crimping*
- *Battery belt, reduces overall weight of the tool*
- *Long lasting lightweight battery 8 hours and only 698g*
- *Crimps all Strainrite crimps up to 4mm without any changes needed, Narrow jaws give you greater access to smaller spaces.*

Strainrite FENCING SYSTEMS

Staple Pullers / Cutters

UltraCrimp 5in1 Multi Tool, The Genuine Ezepull Fencing Tool that does it all: Staple pulling, wire crimping, wire cutting, wire stripping and wire joining.

- Hardened cutlery grade heat treated steel jaws
- Lightweight and compact
- Comfortable rubber grips
- Strong double action with over-centre lever for superior strength crimps

5 in 1 tool

Ezepull Ultracrimp 5 in 1 Fencing Tool
A2247



Also available are the Strainrite Ezepull 4 in 1 and the Ezecrimp 3 in 1 crimping/cutting pliers.

Crimp Sleeves

Genuine New Zealand made crimp sleeves are used to permanently join wire netting and line wire.

These crimp sleeves provide a joint that exceeds the strength of the wire. It's the easiest and most effective means of joining wire without the time consuming job of hand tying.

Spec.	Per Pottle	Code
2.5mm	100	A1340
2.5mm	500	A1341
2.5mm	1000	A1343
3.15mm	50	A1332
4.00mm	50	A1322



Spec.	Per Pottle	Code
Barbed Wire	50	A1352
Electric Fencing	50	A1342

Wire Strainers

The most versatile wire strainer.

Why use an XT1 instead of standard cliplock? They have the added advantage of a wire capture lug meaning they can used in the fence line, not just at ends. Ideal for starter runs and can be re-tensioned.



Strainrite XT1 Permanent Wire Strainer
EF4097



DURASHIELD Insulator

- Superior electrical retention in wet conditions
- Compatible with Cliplock or XT1 permanent wire strainers
- Engineered for top performance at an affordable price



Strainrite Durashield Insulator
EF4097D

- Simple replacement with Snap-On fitting system
- Constructed with Ecoblend ASA – strong, durable and UV-stabilized
- Insulators only, sold in packs of 10

Insul Activator Strap

Insul-activator strap insulator is a unique product, quick and simple to install with various advantages over traditional methods.

Multi-function Post Insulator - Eliminates auxiliary components such as the egg insulator, pin lock insulator, activator plate and separate electrical lead.



Petrol Post Drivers



MINI POST DRIVER

- 2 stroke, Single cylinder, air cooled, petrol
- Maxi power 900W at 7000rpm
- Vibration level - 12.995 m/s ² (Data from 100mm diameter wooden post)
- Noise level- >100db Hearing protection required
- 1500 blows per minute
- Joules (max) - 45
- Starting method - Recoil type 'pull' starter
- Fuel consumption - 0.51L/h at 7000rpm
- Weight - 13.2kg



CLASSIC 35

- 4-stroke, overhead cam, petrol
- Max power 1.0KW (1.3HP Classic35) at 7000 rpm
- Vibration level - 9.94 m/s ² (Data from 100mm diameter wooden post)
- Noise level- >100db Hearing protection required
- 1720 blows per minute
- Joules (max) - 55
- Starting method - Recoil type 'pull' starter
- Fuel consumption - 0.71L/h at 7000rpm
- Weight - 15.3kg



CLASSIC 50

- 4-stroke, overhead cam, petrol
- Max power 1.47KW (2.0HP Classic50) at 7000 rpm
- Vibration level - 11.38 m/s ² (Data from 100mm diameter wooden post)
- Noise level- >100db Hearing protection required
- 1780 blows per minute
- Joules (max) - 49
- Starting method - Recoil type 'pull' starter
- Fuel consumption - 0.70L/h at 7000rpm
- Weight - 16.1kg



MAX 107

- 4-stroke, overhead cam, petrol
- Max power 1.47KW (2.0HP Classic50) at 7000 rpm
- Vibration level - 11.38 m/s ² (Data from 100mm diameter wooden post)
- Noise level- >108db Hearing protection required
- 1780 blows per minute
- Joules (max) - 59
- Starting method - Start / stop button
- Fuel consumption - 0.71L/h at 7000rpm
- Weight - 17.5kg
- Larger piston than Classic 50 to drive in larger post profiles.



Petrol Post Driver Adaptors

Multi Adapter: 3-in-1 Post Adaptor



PETROL POST DRIVER

The Multi Adapter is a 3-in-1 adapter system. It includes 3 adapter sizes which slot into each other.

Compatible with the Classic35, Classic50 and Max107 petrol post driver models

Portek Mini Post Driver Y Adaptor



Portek www.portek.co.uk

Compatible with 'Y' shaped fence posts using Portek's unique die-cast aluminium adaptor.

The barrel accommodates almost all types of fencing posts and stakes up to a maximum 3" (7.62 cm) diameter.

Compatible with the Clipex post range for easy installation.

CLIPEX

Did You Know?

We also sell manual post drivers on p172.



Manual Post Drivers

Roughneck Small Post Rammer
CL2790

The Roughneck small post rammer is ideal for driving in angular, tubular and square posts. The heavy gauge tubular steel body accommodates post up to 68mm in diameter, and features large handles for safe and secure use.

- Heavy gauge tubular steel body
- Anti-corrosion powder coated finish

Internal Dia.	Length	Width	Weight
68mm	714mm	230mm	9200g

HEAVY DUTY | LARGE HANDLES | POWDER COATED





Strainrite Steel Post Driver
A2433

- Reduced noise and shock on impact back through operators hands
- Solid welded steel construction
- Special design for improved service life
- Overall height 800mm (31.5")
- Overall width 220mm (8.5")
- Internal Diameter 54mm (2")
- Overall handle Length 520mm (20.5")



Strainrite Steel Post Driver Sleeve 54mm
A2434

- Solid welded steel construction and painted finish
- Use with sledge hammer
- Overall height 180mm (7")
- Internal diameter 54mm (2")
- Suitable for light duty driving of steel posts, tie-down posts & finish driving of earth stakes



Post Hole Bumper/Rammer
A2430

155mm o/d dia painted two handled post bumper/rammer. Essential tool for driving in various sized posts. Manually operated by one or two persons.

- Weight approx. 12.8 kilo.
- Size: 640mm x 155mm dia



Clipex Standard Post Rammer
A2428

Handy for Clipex standards and eco posts and timber stakes up to 70mm diameter.

- 70mm diameter
- 8kg weight
- 80cm length

Mauls & Hammers

Fence Maul 5kg Alloy Head c/w Hickory Handle
A2437

- 5kg aluminium alloy hammer head



Fence Maul with Hickory Handle
A2435

Fencing maul 5kg head with a hickory handle, ideal for driving in wooden fence posts.




Fence Maul with Fibreglass Shaft
A2436

Fencing maul 5kg head with a fibreglass handle, ideal for driving in wooden fence posts.



Sledge Hammer

- Milled convex faces
- 45° chamfered edges
- Overstrike protection
- Solid fibreglass core
- Soft grip
- Drop forged
- Heat treated
- Painted head

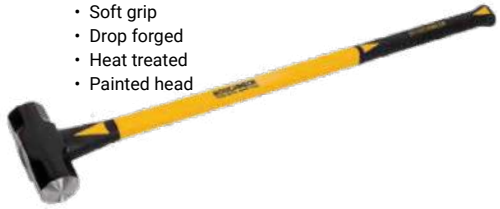

Claw Hammer
A2910

- Matte finish steel alloy head
- Mini-claw nail remover
- Solid fibreglass core handle
- Air cushioned grip
- Lanyard connection hole



V Series Claw Hammer


- V-Shock anti vibration system
- Power-Strike optimised balance design
- 1 piece steel construction
- Magnetic nail holder
- Mini-claw nail remover
- Air cushioned grip
- Lanyard connection hole



Visit our Website!
Still haven't found what you're looking for?
Then no worries, go to **mcveighparker.com** and check out our whole product range. Our experienced and helpful sales staff look forward to dealing with your request very soon.

Premium Heavy Duty U & J - Pins

Steel U & J - Pins, are tough enough to be driven into most soil types using a simple club hammer. Recommended to hold down fence sections where there is to be a likelihood of dogs or burrowing animals. The ribbed re-bar fabrication makes them a stronger holding pin than other material types.

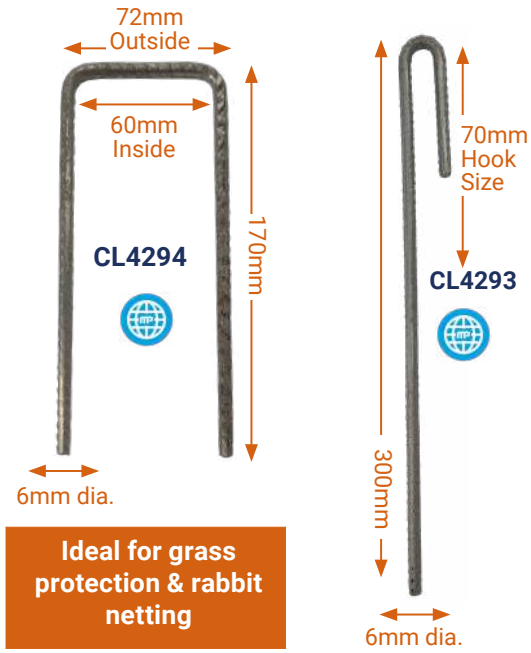

Ideal for grass protection & rabbit netting

Tensile Strength	Weight	Box Contents	Coated Weight
550 - 625N/mm²	115 grams	200 pins	Electroplated 8 - 10 microns

Estimated Pin Requirements : A guide only, some soil types or topography may require more of less

Initial Roll	Pins req.
*Grass Reinforcement Mesh : 2m x 20m	200
Turf Reinforcement Mesh : 2m x 20m	150
Badger fencing wire netting : 1.58m x 50m	150
* Badger embankment netting (as above)	395
* Rabbit netting fencing per 50m	150
Rabbit netting embankment 50m	300

Note - If soil is soft or you require a stronger holding consider U pins (CL4294) or Terra-pins (A1557).

**** J Pins can be used with grass reinforcement mesh, badger and rabbit netting***



Cutting & Joining

Strainrite Staple Cutter/Puller
A2016



- One Handed Staple Pulling PLUS Wire Twister, Wire Cutter, Wire Stripper and Wire Grip
- Ergonomic design that is comfortable to use and well balanced
- Dimensions: 75mm x 265mm

Strainrite Standard Wire Cutter
A2019



- Lever action
- Hardened cutting edges for up to 2.5 HT wire
- Comfortable non-slip handles.
- Overall length 205mm (8")

Multi Fence Pliers
A2000



- Head incorporates a striking face
- Staple removing hook
- Pincer and clamp on top jaw

Expert Wire Cutters - Parrot Beak
A2012



- Essential for cutting stock fencing, barbed and line wire
- Single handled use

Knipex Cutters
A2043



- Precision cutting
- Suitable for soft and hard wire up to 5.2mm
- 64 HRC on the Rockwell rating system
- Recess cutting edge
- Cuts spring steel up to 3.6mm

Knipex Compact Bolt Cutters
A2041



- 160 mm High Performance Chrome Vanadium Steel Bolt Cutter
- Small, slim head for excellent accessibility
- Compact and powerful: cuts bolts, nails, rivets etc.

Maun Parallel Action Side Cutter
A2020



- 200mm - Maun pliers
- Cutting capacity Ø (mm) Hard Wire - 2.5 / Soft Wire - 6.0
- Jaw width (mm) - 12.5
- Jaw opening (mm) - 17

Strainrite Fencing Systems

McVeigh Parker are a main supplier of Strainrite Fencing Systems. Contact one of our depots to find out more.


The Gripper

"The Gripper"
A2218

- Will not slip or drop off the wire
- 1-4mm wire capacity
- Easy to handle
- Spring loaded
- Plier type release
- Replaceable grip points
- 6mm quick link



Lever Hoist Winch Strainer
A2219

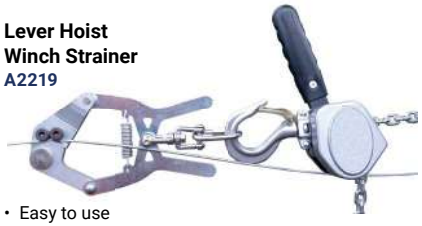

- Easy to use
- Non-slip replaceable teeth
- Deliver full load transfer
- Wire strainer, 500kg hoist

Digital Tension Gauge
A2213

- 300 Kgs in Line Crane Scale
- Cast Alloy Body
- Large 2" LCD backlight display
- 2 AA Batteries Supplied
- 10mm Diameter Stainless Steel U bolt and Hook
- Measure Tension in Kilos, Newtons or Pounds.



Helpful Hint

Enabling you to grip the wire without maintaining tension on the wire. Spring loaded scissor action jaws make them easy to attach and release.

GRAB A GRIPPER

INNOVATIVE TOOLS MAKING FENCING EASIER, FASTER AND SAFER



Years of reliability and trouble-free straining

Milwaukee Fencing Tools

Milwaukee M18 Fuel Utility Fencing Stapler






Stapler

- **Milwaukee M18 Fuel Utility Fencing Stapler x 1**
- **M18 High Output 3.0AH Battery x 2**
- **M12-18 Fast Charger x 1**
- **Kit box x 1**

One full charge will approximately use one box of staples

Milwaukee M18 Fuel Utility Fencing Staples

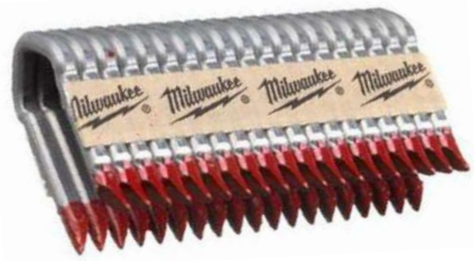

Suitable for all types of wire fencing attached to wood ie. livestock fencing, square/chain/barbed wire and high tensile wire. Staples are hot dipped galvanised coating for superior long term corrosion resistance and made from 4mm thick steel wire for best lifetime in outdoor applications.

Features sharp divergent point tips – the staple point tip twists as it is driven into the wood giving better holding power and the red adhesive coating gives increased drivability while maximizing holding power.

Staple Box Options	Code
40 x 4mm staples	FX2745
45 x 4mm staples	FX2746
50 x 4mm staples	FX2747

Click link to view full product range

Did You Know?

We also stock standard & barbed fencing staples

See page 184



Tensioning & Strainer Tools



Simple Wire Tensioner

A2245

- A simple wire strainer
- Pivoting head pinching the single wire gives excellent leverage
- Compatible with plain or barbed wire 1.6 - 4.0mm



Fence Wire Tensioning Tool

A2246


- Fence wire tensioning tool designed for tensioning wire (including barbed wire) up to 4 mm diameter prior to stapling onto wooden fencing posts
- Stock fence netting can be tensioned one strand at a time, ideal for emergency repairs



Strainrite Tensioning Tool

A2243

- Easily tie off/staple wire hands free!
- Quick and easily tensions either fencing or netting wire around strainer posts
- Smooth grip wire clamp prevents wire damage
- Overall length approx 678mm (26")

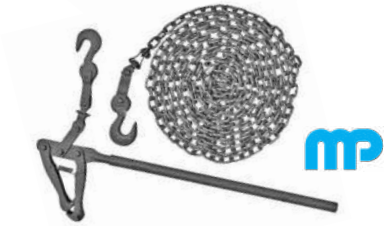

Hook Chain Strainer

A2210

- Chain length: 6 Metre (19'7") tested chain
- Clevis hook on the chain and strainer body
- Loading: 600kg load max
- Handle length: 45cm (18")
- Simple to use



Wire Grab Strainer


A2215


- Also known as a Monkey chain strainer
- Swivels for left or right hand operation
- Compatible with single or barbed wires, from wire dia - 1.6mm to 5.0mm

Boundary Clamps

Strainer clamps are a specialist item used by professional fencing contractors. It is the perfect tool to provide correct and even tension to any livestock fence. It will save you time and money in erection costs whilst ensuring that you achieve a professional constant tension.



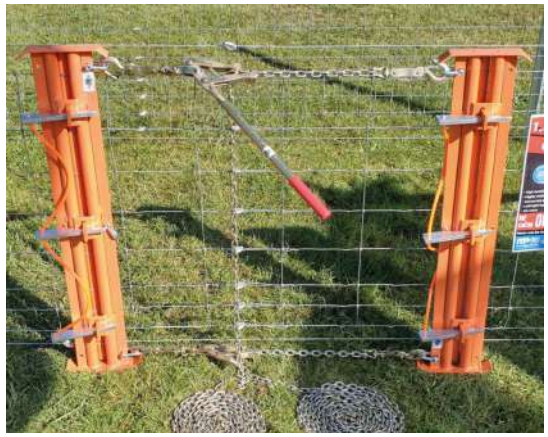

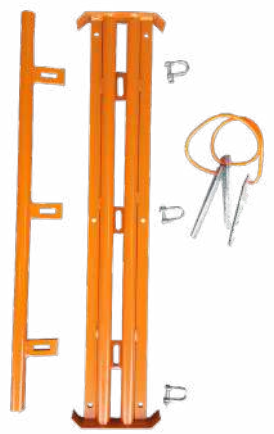

Options Available

McVeigh Parker strainer clamps are available for stock fence, horse and deer netting. Dependent on your choice of clamp for stock fence, horse or deer netting, the clamp has 3-5 tensioning points both sides. Simply attach your grab chain strainer (A2210) at the top, middle and bottom for even tension.

Quick fit wedges make straining wire quick and easy. Simply place the wire over the tubular sections and hammer the wedges in, clamping the wire in place. Once strained the clamps can be quickly and easily knocked out.

Specifications

- Painted fluorescent orange, easily visible in the field
- Frame is manufactured from 5mm flat high tensile steel
- 32mm dia x 4mm thick seamless tube clamp bar
- High tensile strength 370-500 N/mm2 to BS 080A15
- Dee shackle straining point supplied hot dip galvanised
- Wedges 12.5mm thick, zinc plated
- All models are manufactured from heavy duty, high tensile steel.

Size	Code
Stock 1.0m - 3 tensioning points	A2220
Horse 1.3m - 4 tensioning points	A2225
Deer 2.0m - 4 tensioning points	A2230

Nails & Screws

Nails

Available in both round head and spring head options supplied in 1kg bags.

- Available in a range of different sizes
- Heavily galvanised for longer life
- Sharp long pointed points for easier driving

Dimensions	Style	Per Kg Bag	Code
65mm x 2.65mm	Round Head	216	FX1451
75mm x 3.75mm	Round Head	187	FX1501
100mm x 4.0mm	Round Head	101	FX1001
125mm x 5.0mm	Round Head	51	FX1701
150mm x 6.0mm	Round Head	31	FX1901
65mm x 3.35mm	Spring Head	140	FX3001



Nail Plates FX3200 (51 x 127mm) FX3210 (76 x 101mm)

Add strength to your wooden posts with our nail plate strengthening post tops.

Nail plates help to reduce natural splitting, especially in Chestnut products.

- Add strength to wooden posts
- Also used to build/reinforce simple structures
- Currently available in 2 sizes







Carpenter Mate Screws

The Carpenters mate Pro Hex Head Screws are specialized fasteners designed primarily for heavy-duty timber construction.







Description	Per Box	Code
90mm Landscape Screws	100	FX6410
140mm Landscape Screws		FX6415
190mm Landscape Screws		FX6420
240mm Landscape Screws		FX6425

(Also available in quantity 250 boxes)

Description	Per Box	Code
40mm Deck Screws	200	FX6450
50mm Deck Screws		FX6455
63mm Deck Screws		FX6400
75mm Deck Screws	150	FX6470
90mm Deck Screws		FX6475

Tek Screws



Descript.	Dia's	Code
Tek Screw (Stitching)	6.3mm x 22mm	FX6003
Tek Screw (Heavy Steel)	5.5mm x 38mm	FX6005
Tek Screw (Wood)	6.3mm x 45mm	FX6001
	6.3mm x 80mm	FX6100

Masonry Bolts

A versatile mechanical anchor that performs well in a wide variety of building materials. Advantages
A mechanical fixing with no expansion stress on substrate.



- Sizes from 50mm to 200mm
- A mechanical fixing with no expansion stress on substrate.
- Fixes close to the edge.
- Self tapping thread allows for total removal of the anchor making it ideal for temporary fixings.

Digging

Economy Post Hole Digger

A2320


- Lightweight economy post hole digger
- Wooden handles
- 150mm x 450mm blade
- Our most popular post hole digger
- A must for contractors



Roughneck Post Hole Digger

A2303

- 1650mm long
- 240mm x 450mm blade
- Strong construction
- Our most popular post hole digger
- A must for contractors
- Get deeper with hinged arms



Insulated Post Hole Digger

A2318

- Product handle - 48" solid core fibreglass
- Product size - 7"dia X 10.1/2" blade
- 60% fibre in the solid fibreglass core handles, nearly 50% more than cheaper makes
- Conforms to BS8020:2011



Insulated Post Hole Digger

A2301

- Fully insulated
- Scissor action
- New improved design
- A must for fencing contractors
- 1220mm (48") solid fibreglass handles
- 32mm (1.2") diameter handles
- 3200mm x 650mm (7.8" x 2'1") blade size
- Conforms to BS8020:2011



Insulated Crowbar Chisel and Point

A2358

- 32mm solid core fibreglass handle
- 1524mm (60") overall height
- 60% fibre in the solid fibreglass core handles, nearly 50% more than cheaper makes
- Solid forged heads
- Strongest in the industry
- Conforms to BS8020

Insulated GPO Post Hole Graft

A2353

- Blade size - 125mm x 300mm (5' X 12")
- Handle - 1350mm (54") solid core fibreglass handle
- 60% fibre in the solid fibreglass core handles, nearly 50% more than cheaper makes
- Solid forged heads
- Strongest in the industry
- Conforms to BS8020



Insulated Navvy Pick

A2355

- Suitable for breaking up hard ground
- Weight 7lb
- 914mm (36") handle
- 60% fibre in the solid fibreglass core handles, nearly 50% more than cheaper makes
- Solid forged heads
- Strongest in the industry
- Conforms to BS8020



Insulated Clay Graft

A2351

- 28" poly fibre shocksafe insulated handle
- 152mm x 304mm (6" x 12") blade
- 60% fibre in the solid fibreglass core handles, nearly 50% more than cheaper makes
- Solid forged heads
- Strongest in the industry
- Conforms to BS8020



Netting Tools & Clips

Netting Pliers – Rapid 22
A1145



- Spring loading cartridge
- Magazine capacity - 50 pre-formed clips
- Hog ring diameter 5-11mm

Netting Clips – M Ring (Hog Ring)
A1146



- Galvanised Steel 2.0mm
- Open: 20mm (W) x 11mm (H) x 2mm thick
- Closed: 10mm wide (outer), 5mm (inner)
- 1600 per box

Netting Pliers – CL37
A1140



- Magazine capacity - 25 pre-formed clips
- Forms a triangular ring

Netting Clips – CL37
A1130



- Aluminium mild steel
- Wire gauge: 3.759mm (9 gauge)
- Open: 30.18mm
- Closed: 11.11mm triangular shaped clip
- 3000 per box

Netting Pliers - CL22 RP22
A1210



- Spring loaded, automatic feed for one handed speedy operation
- Magazine capacity - 50 pre-formed clips
- Forms a 6-8mm triangular ring

Netting Clips – CL22 RP22
STAINLESS STEEL: A1224
GALVANISED: A1222



- Galvanised and stainless steel options available
- Wire gauge: 1.83mm (15 gauge)
- Open: 19.05mm (3/4") Crown
- Closed: 6.35mm) (1/4")
- 1000 per box

Weld Mesh Manual Netting Pliers – CL35
A1257



- Solo manual single clip fencing tool
- Designed for low to medium service life and easy maintenance
- Use with loose clips

Weld Mesh Netting Clips Loose Galvanised – CL35
A1259



- Hot dip galvanised
- Clip is 19mm wide x 20mm deep when open
- 12mm dia circle when closed
- 1000 loose per box.

Netting Pliers – SR8
A1120



- All steel design with a spring-loaded magazine capacity - 50 pre-formed clips
- Forms a circular clip

Netting Clips – SR8
A1110




- Wire gauge: 1.52mm (16 gauge)
- Open: 17.46mm (11/16") Crown
- Closed: 7.14mm) (9/32") Diameter
- 2500 per box

CL35 Clip Gun - CL35
A1250



- Can be used for tree guards, bird control, fruit and rabbit netting
- Suits our CL35 netting clips
- Heavy duty construction for everyday use

Weld Mesh Stainless Steel Netting Clips - CL35
A1255



- 19mm wide x 20mm deep when open
- 12mm dia circle when closed
- Supplied in pre-formed strips for easy loading
- 1224 per box

Staples

Staples are the most popularly used fixing, used for fixing various gauges of fencing wire and netting to timber stakes and other wooden surfaces.

Manufactured from heavy galvanised wire for long life.

Standard Staples



- Indented design for greater holding
- Heavily galvanised for longer life
- Sharp long pointed points for easier driving

Dimensions	Per Kilo	Code
25mm x 2.60mm	486	FX2201
30mm x 3.55mm	226	FX2301
40mm x 4.10mm	136	FX2401

20Kg Tubs



25mm x 2.60mm	486	FX2211
30mm x 3.55mm	226	FX2311
40mm x 4.10mm	136	FX2411

Barbed Staples




FX2607

- For increased holding we recommend using barbed staples for high tensile wire, this allows the wire to flex without popping the staples
- 40mm x 4mm barbed staples
- Comes in 20kg tubs

Fencing Staples Installation Guide

Below, the do's and don't s when installing fencing staples.

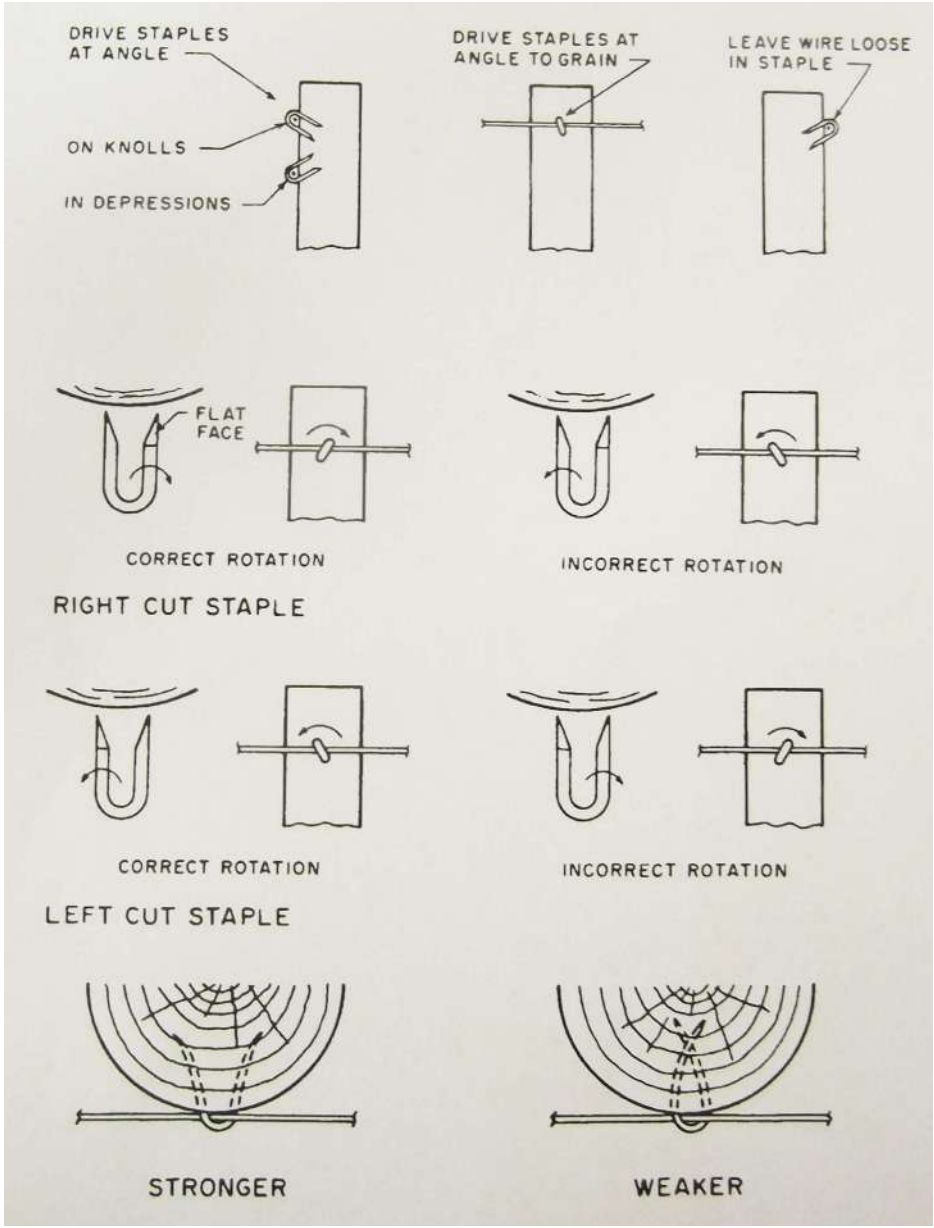

Other Tools

Galvanised Spinning Jenny Wire Dispenser



A2200

- A heavy duty design, electroplated finish, high quality 'Spinning Jenny' wire dispenser is an essential tool when handling wire coils
- The fully welded box section construction is sturdy heavy duty with a central ground spike
- The brackets adjust by a simple wing nut operation to the diameter of the coil. Not only is dispensing wire made easy, it can also be used for recoiling old wire.

Collapsible Spinning Jenny Wire Dispenser



A2201

- A heavy duty design, electroplated finish, high quality 'Spinning Jenny' wire dispenser is an essential tool when handling wire coils
- Sturdy heavy duty with a central ground spike
- Can also be used for recoiling old wire.


Strainrite Single Titan Wire Jenny



A2208

- Flip-over wire retention arms
- Superior balance for heavier wire loads
- Self-regulating friction hub to prevent wire overrun
- Drop arm design for better balance
- Rugged steel construction with gold zinc corrosion protection
- Quick wire coil reloading
- Designed for wire coils with an approx internal diameter of 525mm
- 800mm Diameter

Strainrite Contractor Quad Jenny

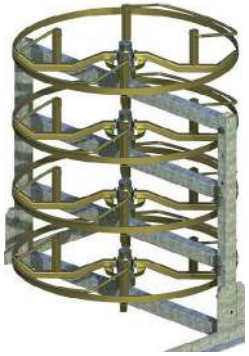



ATV trailer version an optional extra

A2202

- Designed for dispensing up to four 1000m Coils in all conditions
- New arm design allows for easy uncoiling and centring of wire
- Swing arm design for easy individual rotor reloading.
- Swing Over Arm Design - Features swing arm design for easy individual rotor reloading. Designed for dispensing 1000m Coils in all conditions.

Padlocks & Sleeved Chains

For additional site security, our padlock range delivers robust, weather-resistant security designed for demanding agricultural and industrial environments. Built from hardened, corrosion-resistant materials, these locks offer dependable protection against cutting, drilling, and tampering.



Brass Padlock

Our padlocks are manufactured from premium quality materials to ensure a high level of security.

Supplied with 3 keys.

Available in 2 sizes
• 50mm, 2" (50mm) - ET3020
• 60mm, 2.5" (60mm) - ET3050



ABUS 83WPCS/53 - 53mm Closed Shackle Extreme Weatherproof Padlock

ET5045

The ABUS 83WP Series Weatherproof Padlocks feature a hardened steel body and shackle, both treated with NANO PROTECT™ coating for superior corrosion resistance.



ABUS 83WP/53 - 53mm Open Shackle Extreme Weather-proof Padlock

ET5040

The ABUS 83WP Series Weatherproof Padlocks feature a hardened steel body and shackle, both protected with ABUS NANO PROTECT™ coating for enhanced corrosion resistance.



ABUS 158CS/50 - 50mm Closed Shackle Combination Padlock (4-Digit)

ET5010

The ABUS 158 Series Combination Padlock features a solid die cast zinc body and a hardened steel shackle, offering reliable, weather resistant security. It is available with a resettable 4 digit combination (50 mm).



ABUS 8KS140 - 8mm x 1400mm High Security Chain (Black Sleeve)

ET5110

This hardened steel security chain is manufactured from specially treated chain steel designed to resist cutting, sawing and other forms of attack. It has been tested to withstand a 5 tonne cutting force. A protective fabric sleeve prevents damage to paintwork, chrome and other surfaces.

Did You Know?

We also sell security fencing on p38-41.





Fencing & Agricultural Specialists

Straightforward Advice From People Who Know the Job

Our **Key Account Managers** are practical specialists in **agricultural fencing, rural infrastructure, and livestock handling**, offering **free, honest advice** to farms, estates, contractors, and trade customers across the UK.

From stock and deer fencing to predator control, equine systems, and livestock handling equipment, we understand the real world challenges of farming and land management — because our team has hands on experience in the sector. Whether you're fencing fields, improving livestock flow, securing land boundaries, or buying in bulk for trade, we'll help you choose the right materials at the right price, delivered when you need them.

What We Support:

- **Stock, deer & agricultural fencing**
- **Predator exclusion fencing systems**
- **Timber posts, wire, gates & fittings**
- **Livestock handling equipment & layouts**
- **Rural infrastructure & boundary solutions**
- **Bulk buying and trade supply**

Why Work With Us?

- **Free advice from experienced specialists**
- **Nationwide support with a personal service**
- **Fast, reliable direct to farm or site delivery**
- **Large stocks held ready for dispatch**
- **Competitive trade and bulk pricing**

Speak to a Specialist

Whether it's a single farm or a large rural project, our team is ready to help. Get in touch today for **free expert advice** and dependable supply from people who understand farming.

A **hybrid version** that blends **corporate credibility** with **agricultural practicality** — professional enough for specifiers and infrastructure clients, but grounded and approachable for farms, estates, and rural contractors. It's SEO tight and landing page ready.

Meet the Team



Stuart Mills
Sales Director – Farm & Fencing Specialist (Nationwide)
With over 35 years' experience supporting agricultural and commercial contractors, Stuart is an expert in innovative products such as Clipex, alongside traditional stock fencing, wire systems, timber, and rural infrastructure. His background as a shepherd also provides exceptional insight into livestock handling systems.

stuart@mcveighparker.co.uk - 07766 477004



Amanda Williams
Senior Account Manager (North England)
Passionate about the agricultural industry with over a decade of experience working closely with farmers, contractors, and retailers. Coming from an agricultural background herself, Amanda also manages her own flock of sheep and understands the realities of the industry and takes pride in building trusted, long-term relationships. Amanda also has experience in larger specialist fencing projects, trade stockist negotiator she is able to offer technical support and fast turnaround.

amanda@mcveighparker.co.uk - 07921 388719



Ed Wilkinson
Business Development Manager (Nationwide)
Experienced in developing large scale supply solutions and long term trade partnerships across multiple sectors. Working country estates and not-for-profit land management organisations, with a particular focus on nature restoration, rewilding and regenerative farming.

ed@mcveighparker.co.uk - 07709 100480



Lynne Tomkins
Key Contracts Manager & Company Compliance Officer (Nationwide)
Specialises in Railway compliant specifications and other infrastructure product supply, years of experience, specialising since 2011.

Manages the company ISO & FSC compliance requirements.

lynne@mcveighparker.co.uk - 07484 056658 - Railway Sector Specialist.



Shona Whitehead
Fencing & Agricultural Specialist (Wales & the Midlands)
After attending Barony Agricultural college, Dumfriesshire from school.
I have worked in and around agriculture and horses throughout most of my working life. Joined McVeigh Paker in 2018 as office sales. I now look after customers and trade in the Wales and Midlands area, supporting agricultural, rural, and commercial fencing projects across the region.

shona@mcveighparker.co.uk - 07557 431877



Andrew Hart
Equine Specialist (East England)
Experienced in all aspects of the Equine and agricultural industries working closely with yard and trade accounts offering over a decade of experience to ensure you get the best solutions for your projects. I take pride in building long term relationships and providing excellent service to our customers.

andrew.hart@mcveighparker.co.uk - 07483 933266



Callum Craig
Fencing & Agricultural Specialist (Scotland & the Borders)
Supporting rural, agricultural, and infrastructure projects throughout Scotland. Callum has been in the position since 2018, he has experience working with farmers, landowners, stock-ists and utility companies. His background in engineering, coupled with his knowledge of farming and the fencing industries enables him to offer advice and solutions for our customers.

callum.craig@mcveighparker.co.uk - 07921 388716




Rosie Allen
Key Accounts Manager (Home Counties)
Covering the Home Counties and the South of England. She brings a wealth of agricultural experience, having grown up on a beef farm. Rosie can provide quotations for any farming enquiry. In addition, her academic qualifications make her highly capable of discussing projects such as fencing solutions. Whether you have a special project, are seeking a bulk deal, need a dependable point of contact as a regular contractor, or are a stockist looking for consistent supply, Rosie would be delighted to help.

rosie.allen@mcveighparker.co.uk - 07483 513032

How Big is Your Field Perimeter?

With the easy to use charts below calculate your field perimeter, then how much fencing is needed to enclose the space.

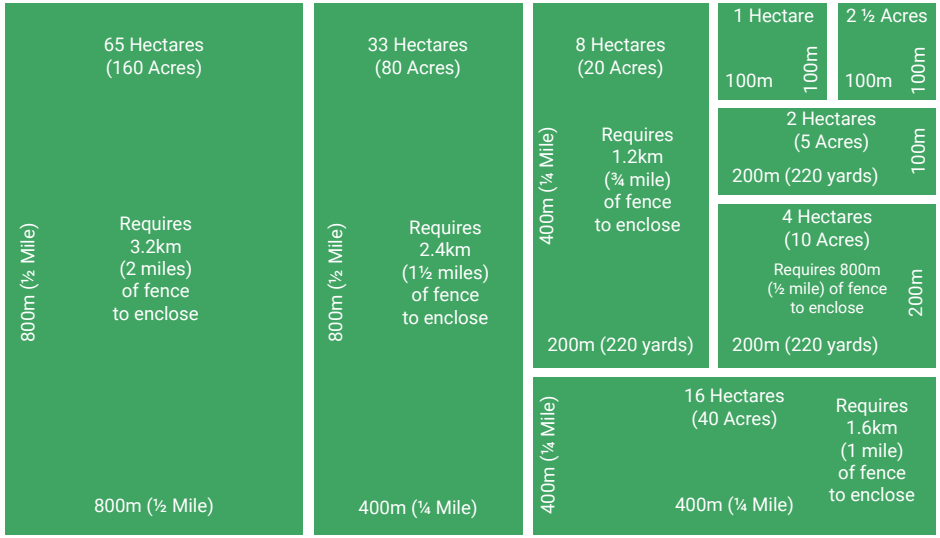

Distances and areas are approximate only.

Fence Perimeter Length Calculator

Hectares	Acres	Fencing Required in Metres
0.1 hectares	¼ acre	= 127 metres
0.2 hectares	½ acre	= 180 metres
0.3 hectares	¾ acre	= 220 metres
0.4 hectares	1 acre	= 255 metres
0.81 hectares	2 acres	= 360 metres
1.21 hectares	3 acres	= 441 metres
1.62 hectares	4 acres	= 509 metres
2.02 hectares	5 acres	= 569 metres
4.05 hectares	10 acres	= 805 metres
8.09 hectares	20 acres	= 1141 metres
16.19 hectares	40 acres	= 1609 metres
20.24 hectares	50 acres	= 1800 metres

How Many Staples per Kilo?


Our customers ask us all the time how many staples they get per kilo. The table below hopefully answers a lot of those questions.

Staple Description	Staples Per Kilo
15 x 1.6mm Staples	2191
20 x 2.0mm Staples	1079
25 x 2.65mm Staples	486
30 x 3.35mm Staples	226
40 x 4.0mm Staples	136
50 x 5.0mm Staples	70
40mm Barbed Staple	136
30mm Barbed Staple	226



Wire Gauge Chart

Wire Gauge Tip: The bigger the number the smaller the wire gauge

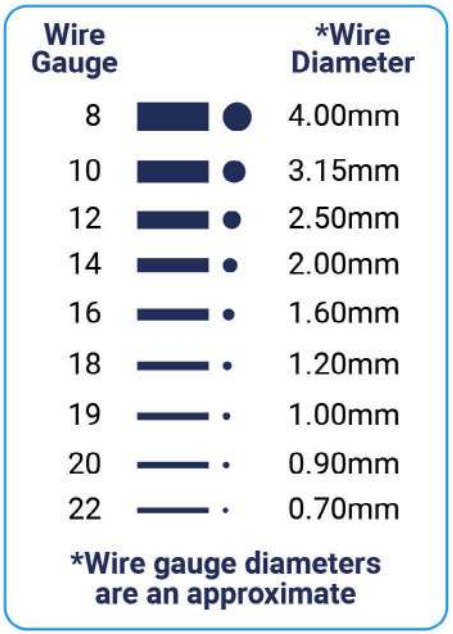

STILL NOT FOUND WHAT YOUR LOOKING FOR?

Check out our full range using the link below



McVeigh Parker Branch Details

Contents



McVeigh Parker has eight nationwide branches all staffed by experienced teams offering great advice and customer service

Berkshire
Southend, Bradfield,
Reading, RG7 6HA
Tel: 01189 744777
Email: berks@mcveighparker.co.uk

Cambridge
Caxton Depot, Ermine Street,
Caxton, CB23 3PG
Tel: 01954 714110
Email: cambs@mcveighparker.co.uk

Devon
Muxbeare Lane, Uffculme, Cullompton,
Devon, EX15 3BY
Tel: 01884 824486
Email: devon@mcveighparker.co.uk

Kent
Thornden Farm, Lenham Road,
Headcorn, TN27 9LH
Tel: 01622 891095
Email: kent@mcveighparker.co.uk

Lancashire
Park Lane Industrial Estate, Wigan Road,
Ashton-in-Makerfield, Wigan, WN4 0BZ
Tel: 01942 725523
Email: lancs@mcveighparker.co.uk

Scotland
Market Road, Biggar,
Lanarkshire, ML12 6FX
Tel: 01899 221150
Email: scotland@mcveighparker.co.uk

Sussex
Stane Street,
Billingshurst, RH14 9JR
Tel: 01403 784250
Email: sussex@mcveighparker.co.uk

Worcestershire
Unit 16, Wilden Lane Industrial Estate,
Stourport on Severn, DY13 9JY
Tel: 01299 826111
Email: worcs@mcveighparker.co.uk