



mp McVeigh Parker

Farming and Fencing Specialists

Triple X
Long-Life Fencing Solution
From McVeigh Parker

Nationwide Suppliers

03330 050115

www.mcveighparker.com

McVeigh Parker

National specialist suppliers of fencing and agricultural products in the UK

McVeigh Parker are one of the premier specialist agricultural stockists in the UK and have earned a reputation for innovation, expertise and competitive pricing. We are constantly looking at better, more advanced products that offer a greater return on investment. We have a proven track record delivering to major organisations such as Network Rail, National Trust, Environment Agency, RSPB, Highways England and others.

We have been selling fencing for over 40 years and have learnt that there is no such thing as a one size fits all approach to the job or budget. In keeping with our spirit of innovation, we have brought together some of the best products in the market to offer you a complete fencing solution.

Triple X is the name we've given to an all-steel fencing system using the revolutionary Clipex quick clip steel post with Xfence stiffstay premium wire netting and all-steel strainers, plus a choice of barbed, plain or electric wire.

This is a fencing system like no other and can offer up to 50% cost savings on a fence with a life expectancy exceeding thirty years. It takes significantly less time to erect, cutting labour and machinery costs.

So, before you invest your hard-earned capital in your next fencing project, contact a member of the McVeigh Parker team. We are confident that we can offer you a solution that is cost effective, sustainable and much longer lasting than traditional or similar systems.

Chris Hambridge

Director, McVeigh Parker



AWARD WINNING FENCING SOLUTION TRIED, TESTED, PROVEN

- Long-life fencing solution
- Faster to erect and lighter to transport
- Strong premium long lasting wire netting
- Up to 50% lifetime savings
- Proven in the field
- Multi-award winning
- All lines held of chosen fabricated netting
- Used by many leading organisations
- No stapling required
- No fiddly loose components
- Minimal ground disturbance
- 30 year guarantee
- Strainers made in Britain



“Fencing
for the next
generation”

Contents

What is Triple X?	4
The Fencing Benefits	6
Clipex All Steel Post	
Specifications	7
Post Strength & Specifications	8
UK Clipex Range	10
Triple X All Steel Strainers	
Triple X All Steel Strainer	12
Strainer Components	14
Xfence Premium Wire	
About	16
Compatible Wire Patterns	18
30 Year Guarantee	19
Case Studies	20
Line Wire Systems	36
Installation	40
Product Guide	41
Accessories & Tools	42
FAQs	45
Get In Touch	46



CLIPEX® STEEL POST



- Clipex the multi-award winning innovative permanent quick clip galvanised steel post.
- Each post has pre-fixed clips designed to take all the horizontal wires of your chosen Xfence wire netting.
- Each wire is held firmly in place with a spring-loaded clip, no fiddly parts to lose or fit after erection.
- These clips allow lateral flex, very little vertical wire movement can happen, which is important when livestock start putting pressure on the fence.
- Each post has a pre-fixed anti-lift plate below ground level to prevent lifting in soft or undulating ground.
- Hot dip galvanised and independently tested in the UK, exceeding British Standard coating recommendations.
- **Galvanised coating exceeds British Standard BS EN ISO 1461**

FOR MORE CLIPEX® INFORMATION
GUIDE/SPEC SHEET

www.mcveighparker.com/triple-x-fencing



XFENCE® PREMIUM WIRE




- Xfence premium Stiffstay X knot fabricated wire netting – Buying quality wire is key to any good fence.
- The unique properties of Xfence make it stronger and last longer.
- The high tensile wire properties and one-piece vertical wire reduce the amount of support posts needed, leading to a saving in labour and materials.
- Only primary metals used in fabrication.
- 24% stronger knot.
- Alu/zinc coating lasts 3-4 times longer than heavy galvanised wire.
- Full traceability from source to field.
- Seven Clipex compatible mesh patterns stocked (many more patterns available for other uses).
- **Xfence is manufactured to BS EN 10223-5**
- **Alu/zinc coating exceeds BS EN 10244-2**
- **Dimensions and tolerances conform to BS EN 10218-2**

FOR MORE XFENCE® INFORMATION
GUIDE/SPEC SHEET

www.mcveighparker.com/triple-x-fencing



TRIPLE X® STEEL STRAINER

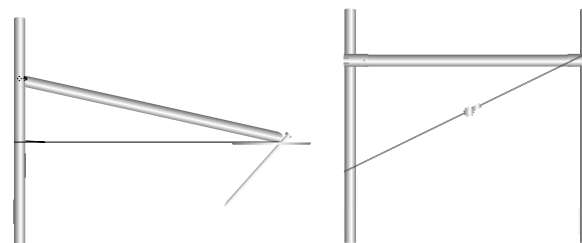

- Triple X strainers British made all steel hot dip galvanised, with fully welded base and thrust plates, fully welded top cap and pre-drilled holes for ease of strut installation.
- The 3.0mm thick strainer allows them to be driven in hydraulically or mechanically.
- Diagonal or box strainer versions available, whichever best suits your requirements and budget.
- Installing a Triple X strainer could not be simpler, minimal components mean full installation in less than 5 minutes is possible.
- **Galvanised coating to British Standard BS EN ISO 1461**

FOR MORE TRIPLE X® INFORMATION
GUIDE/SPEC SHEET

www.mcveighparker.com/triple-x-fencing



A man with short brown hair and a beard, wearing a dark green t-shirt and dark trousers, stands next to a wire fence. He is smiling and pointing his right hand towards the fence. The fence is made of wire mesh supported by metal posts. Behind the fence is a dense line of trees and bushes. The ground in the foreground is grassy with some bare patches.

Matt Smith and his wife Pip farm 310 acres on the edge of Bodmin Moor, farming over 1,000 ewes & 250 breeding hinds equating to approx 600 red deer at any one time.

“We were looking for a long lasting fence, when we came across McVeigh Parker and the steel post system, aesthetically it was something I was unsure of at first, but like it or not, you can't deny it makes perfect business sense. I didn't want to fence this farm four times in my lifetime or leave it in a state of disrepair for the next generation.”

- Matt Smith



Watch video online

The Fencing Benefits



FASTER

- Up to 50% quicker to erect
- No stapling required, saving both time and money
- Steel posts are easier and quicker to drive in
- Maintenance tasks can be performed quicker, such as fixing broken wire or stakes



STRONGER

- Better strength to weight ratio
- High tensile steel construction, which give these posts a degree of flex unlike timber posts
- Two profile options to create a stronger fence



ENVIRONMENTALLY FRIENDLY

- Minimises ground disturbance
- No chemical leaching
- Lighter and easier to transport
- Fully recyclable at the end of its life



EFFICIENT

- No fiddly loose components
- Easier to transport to site
- Takes up less storage space
- No specialist tools required



SECURITY

- Anti lift plate prevents easy removal whilst acting as an anchor in undulating ground
- Coupled with Xfence wire netting creates a formidable barrier
- All lines of Xfence fabricated net are held in place
- Longer lasting stability



LONGEVITY

- Hot dip galvanised to British Standards
- All steel construction
- Very low maintenance
- Aluminium keep with a stainless steel spring



SAVINGS

- 50% savings are achievable in life time costs
- Less machinery and labour required
- Reduced health and safety costs
- Save on the cost and hassle of carrying around staples, hammers, pneumatic stapler and generators



TOUGHER

- Stainless steel rivets applied by 10t press
- Unique spring loaded clip locks all wires in place
- Fully automated weld for added strength




INNOVATION

- Multi-award winning patented design
- Designed for purpose
- Full technical and consultation support
- Bespoke design and projects catered for

CLIPEX[®]

Specifications

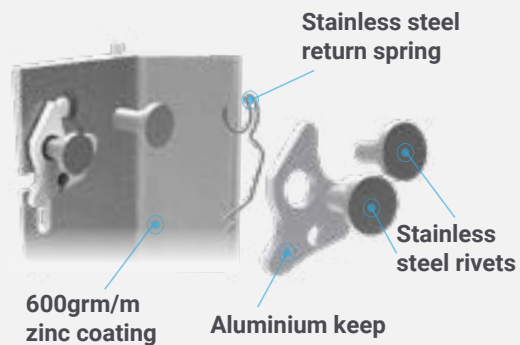

Clip

Self closing spring loaded clip guarantees a secure fixing for your wire. The clip itself is coated with proprietary aluminium to avoid any electrolysis between the fencing wire and the clip.

Backing plate

All our Clipex posts feature a backing plate at ground level, to give the posts strength where it matters most.




Automated weld

Each post now has an automated weld at the top to guarantee that the post won't split when being driven with pneumatic drivers into rocky ground.

Anti-lift plate

All Clipex Standard and Beefy posts are fitted with the unique anti lift plate, which acts as a barbed anchor underground.

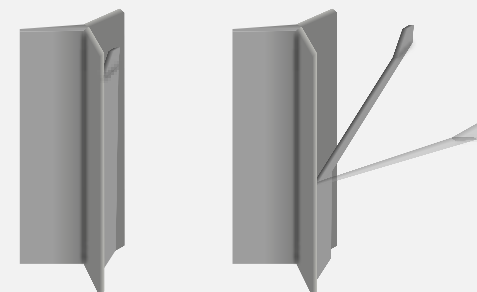

All Steel Post

Post Strength & Specifications

Eco Post

The Eco post has been specifically designed as an entry level post, to suit the most popular hinge jointed stock fence, plain or barbed wire fence applications.

Eco posts have been designed to suit hinge jointed 8-80-15 or 8-80-30 products with two rows of barbed or plain wire. The clips may suit some other fence patterns.

Manufactured from high tensile steel with a 600g/m² galvanised coating which provides a longer life.

Note: Please check mesh pattern against posts *BEFORE* installation, especially important if you are trying to match your own netting.


Standard Post

The Clipex Standard post is higher quality than the Eco post, it is manufactured from high tensile steel with a 600g/m² galvanised coating which provides a longer life with minimal maintenance. Made using a unique cutting edge process, which guarantees a high precision product every time.

Standard stock fence posts are designed to suit Xfence XHT8-80-15, 8-80-22, 8-80-30 with two rows of barbed or plain wire above and one base line below.

The cattle/railway/horse Standard posts are designed for XHT11-122-7.5, 11-122-15 with one top row and one base line of barbed or plain wire.

Standard deer posts are designed to take XHT13-190-7.5, 13-190-15 with one top line of plain or barbed wire.

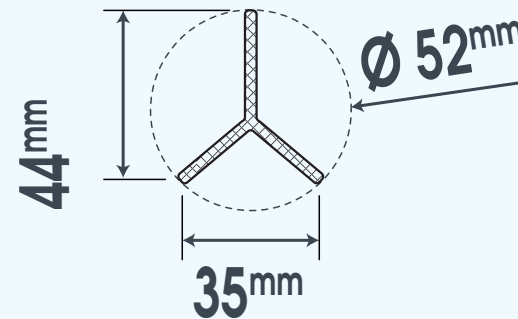

Beefy Post




The Clipex Beefy post is specifically designed to add ground holding and strength to your fence line, where it matters. The profile differs slightly from the Standard and Eco posts, they have slight angled flanges. These give an increased surface area in the ground, as well as reducing any twisting. The flange profile also increases the lateral strength.

The Beefy posts have a stronger strength to weight ratio with 60% greater surface area providing 230% more strength than smaller profile posts. This along with the 600g/m² galvanised zinc coating, anti-lift plate, thicker gauge, high tensile steel and longer length make the Beefy an unbeatably strong and durable post.

When should you use a Beefy post?

We recommend their use in softer soils, high stock pressure areas, dividing paddocks, and dips and peaks in undulating ground. Slight changes in a fence line of less than 15 degrees. You can combine with a Beefy bracket and strut for a cost effective angled support.

A combination of Standards and a Beefy every third or fourth post will strengthen your fence line. Or you can use all Beefy posts to provide a strong formidable, long lasting fence that will offer many years of maintenance free life.

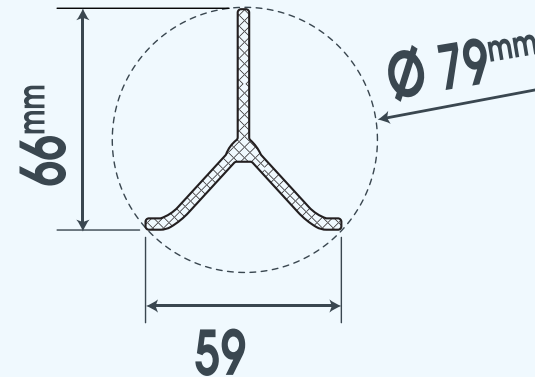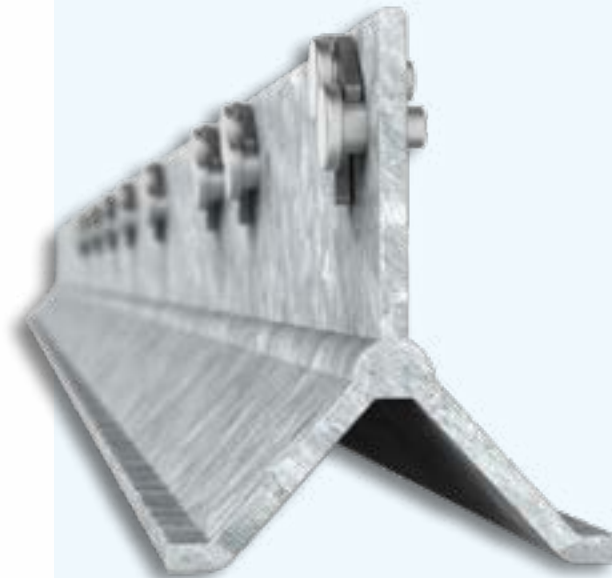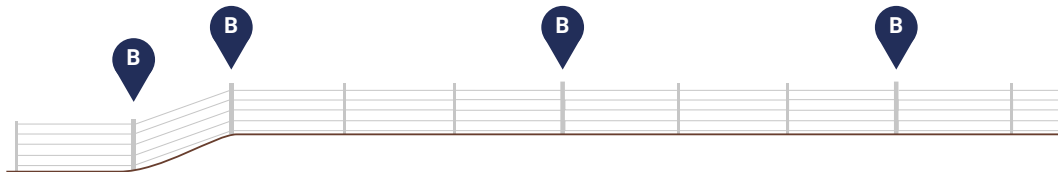

UK Clipex Range

Pasture post

Eco post

Standard/Beefy post

Did you know?

- Electric insulators can be retro fitted to any spare clip on any post
- Clipex caps can be added to any post for added safety, they also have the facility to take electric tape/rope or wire



SEE PAGE: 42

Did you know?

- You can lengthen or extend any post now with the vertical extension kit



SEE PAGE: 42

Pasture Eco - 4 Clips

- **Length:** 1.5m **CL2705**
- **Weight:** 2.16kg
- **In ground depth:** 600mm (fence height - 900mm)
- **Profile:** 44mm x 35mm
- **Thickness:** 2.5mm

Pasture Beefy - 4 Clips

- **Length:** 1.5m **CL2708**
- **Weight:** 5.25kg
- **In ground depth:** 600mm (fence height - 900mm)
- **Profile:** 66mm x 59mm
- **Thickness:** 3.5mm

Compatible wire
Electric rope/wire
Barbed wire
Line wire

Eco - 10 Clips

- **Length:** 1.8m **CL2710**
- **Weight:** 2.59kg
- **In ground depth:** 720mm (fence height - 1.08m)
- **Profile:** 44mm x 35mm
- **Thickness:** 2.5mm

Compatible wire
Hinge joint 8-80-15
Hinge joint 8-80-30
Line wire
Barbed wire
Electric rope/wire

Standard - 11 Clips

- **Length:** 1.8m **CL2715**
- **Weight:** 3.24kg
- **In ground depth:** 700mm (fence height - 1.1m)
- **Profile:** 44mm x 35mm
- **Thickness:** 3.0mm

Beefy - 11 Clips

- **Length:** 2.0m **CL2720**
- **Weight:** 7.0kg
- **In ground depth:** 900mm (fence height - 1.1m)
- **Thickness:** 3.5mm
- **Profile:** 66mm x 59mm

Compatible wire
X knot 8-80-15
X knot 8-80-22
X knot 8-80-30
Line wire
Barbed wire
Electric rope/wire

Rock post



Rock - 11 Clips


- **Length:** 1.5m **CL2716**
- **Weight:** 4kg
- **In ground depth:** 250mm (fence height - 1.1m)
- **Profile:** 44mm x 35mm
- **Thickness:** 3.0mm plus 20mm Re-bar footing



Compatible wire

- X knot 8-80-15
- X knot 8-80-22
- X knot 8-80-30
- Line wire
- Barbed wire
- Electric rope/wire

Cattle/Railway post

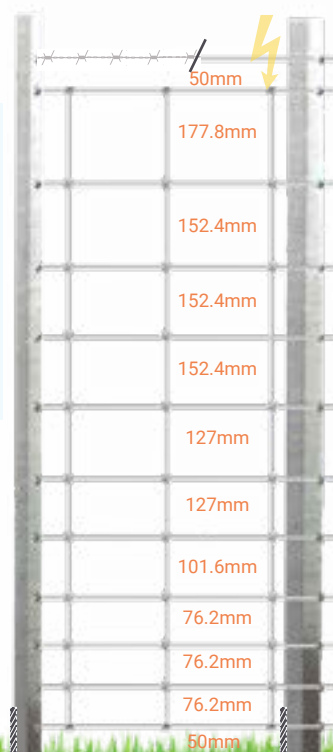


Standard - 13 Clips

- **Length:** 2.0m **CLR2710**
- **Weight:** 3.60kg
- **In ground depth:** 650mm (fence height - 1.35m)
- **Profile:** 44mm x 35mm
- **Thickness:** 3.0mm

Beefy - 13 Clips


- **Length:** 2.1m **CLR2720**
- **Weight:** 7.35kg
- **In ground depth:** 750mm (fence height - 1.35m)
- **Profile:** 66mm x 59mm
- **Thickness:** 3.5mm



Compatible wire

- X knot XHT11-122-15
- X knot horse XHT11-122-7.5
- Line wire
- Barbed wire
- Electric rope/wire

Deer post

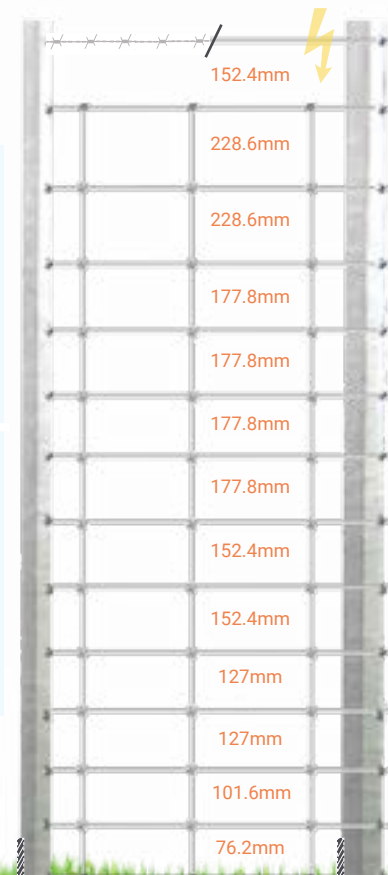


Standard - 14 Clips

- **Length:** 3.0m **CL2725**
- **Weight:** 5.40kg
- **In ground depth:** 900mm (fence height - 2.1m)
- **Profile:** 44mm x 35mm
- **Thickness:** 3.0mm

Beefy - 14 Clips

- **Length:** 3.0m **CL2730**
- **Weight:** 10.5kg
- **In ground depth:** 900mm (fence height - 2.1m)
- **Profile:** 66mm x 59mm
- **Thickness:** 3.5mm



Compatible wire

- Xfence XHT-13-190-15
- Xfence XLHT13-190-15 (light)
- Xfence XLHT13-190-7.5 (light)
- Xfence XHT13-190-7.5
- Line wire
- Barbed wire
- Electric rope/wire



Important :
We highly recommend the use of a CAT scanner before fence installation

Triple X All Steel Strainer

Triple X strainers have been designed by McVeigh Parker and are proven in the field throughout the UK. Used by contractors, utility companies, farmers and landowners for stock, deer and security fencing.

Our British made strainers are a very good alternative to more traditional timber strainers, lasting much longer and saving significant installation and labour time. When teamed up with the Clipex posts and our premium quality Xfence alu/zinc wire netting, you have a fencing system that has a life expectancy of over thirty years.




Benefits

- Simple and quick, installation in under 5 minutes is possible
- Cost-effective over the lifetime of fence
- Guaranteed to exceed a 30 year life
- Diagonal or Box strainer kits available to suit all terrain and soil types
- Only 5 components, easy to assemble, no fiddly parts to install or lose
- Exceptionally strong, fully welded top cap, the thick-walled tubular strainer can be mechanically or hydraulically driven
- Fully welded 6mm thick breast and thrust/directional plates
- Hot dip galvanised in the UK to BSEN ISO 1461
- Easy transportation (reduces carbon footprint)
- Pre-drilled holes to take multiple struts for two way and corner strainers
- Two lengths to choose from, which suit various fence heights
- Corner plate available for retro-fit to create 90 degree angle

Did you know?

- All components are fabricated for easier installation and to avoid any additional construction

Fit our anti-twist plate prior to installation and you can instantly create a ninety degree change of direction for your fence line.

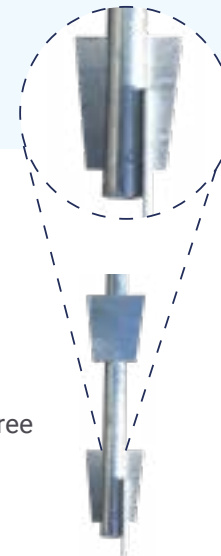

Diagonal Strainer



Corner/2 way Diagonal Strainer



Box Strainer



Box Corner/2 way

Diagonal Strainer

Standard Strainer

- **Length:** 2.4m
- **Weight:** 18.5kg
- **Profile:** 75mmØ x 3mm

Standard Strut

- **Length:** 2.4m
- **Weight:** 8.25kg
- **Profile:** 48.3mmØ x 3mm

End: KCPX10
Corner/2way: KCPX20

Deer Strainer

- **Length:** 3.3m
- **Weight:** 27.5kg
- **Profile:** 75mmØ x 3mm

Deer Strut

- **Length:** 3.0m
- **Weight:** 9.01kg
- **Profile:** 48.3mmØ x 3mm

End: KCPX30
Corner/2way: KCPX40

Box Strainer

Standard Strainer

- **Length:** 2.4m
- **Weight:** 18.5kg
- **Profile:** 75mmØ x 3mm

Standard Strut

- **Length:** 3.05m
- **Weight:** 14kg
- **Profile:** 60mmØ x 3mm

End: KCPX18
Corner/2way: KCPX25

Deer Strainer

- **Length:** 3.3m
- **Weight:** 27.5kg
- **Profile:** 75mmØ x 3mm

Deer Strut

- **Length:** 3.05m
- **Weight:** 14kg
- **Profile:** 60mmØ x 3mm



End: KCPX35
Corner/2way: KCPX45

Eco Beefy Strainer

The Eco Beefy strainer is a cost effective, simple strainer. Ideally suited for electric fence, reinforcing slight angles or semi-temporary fencing end strainer.



Eco Beefy Strainer: KCPX15
See page 14 for all components

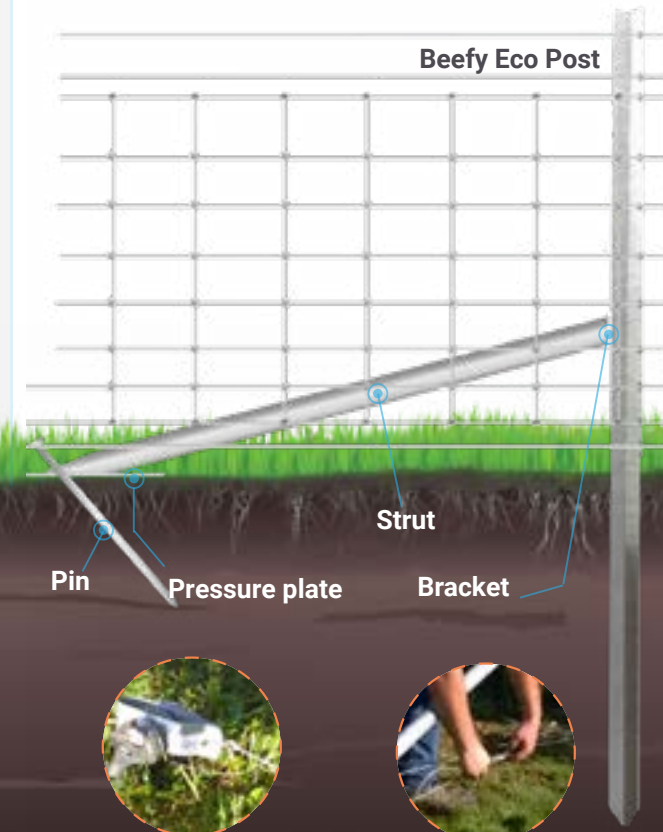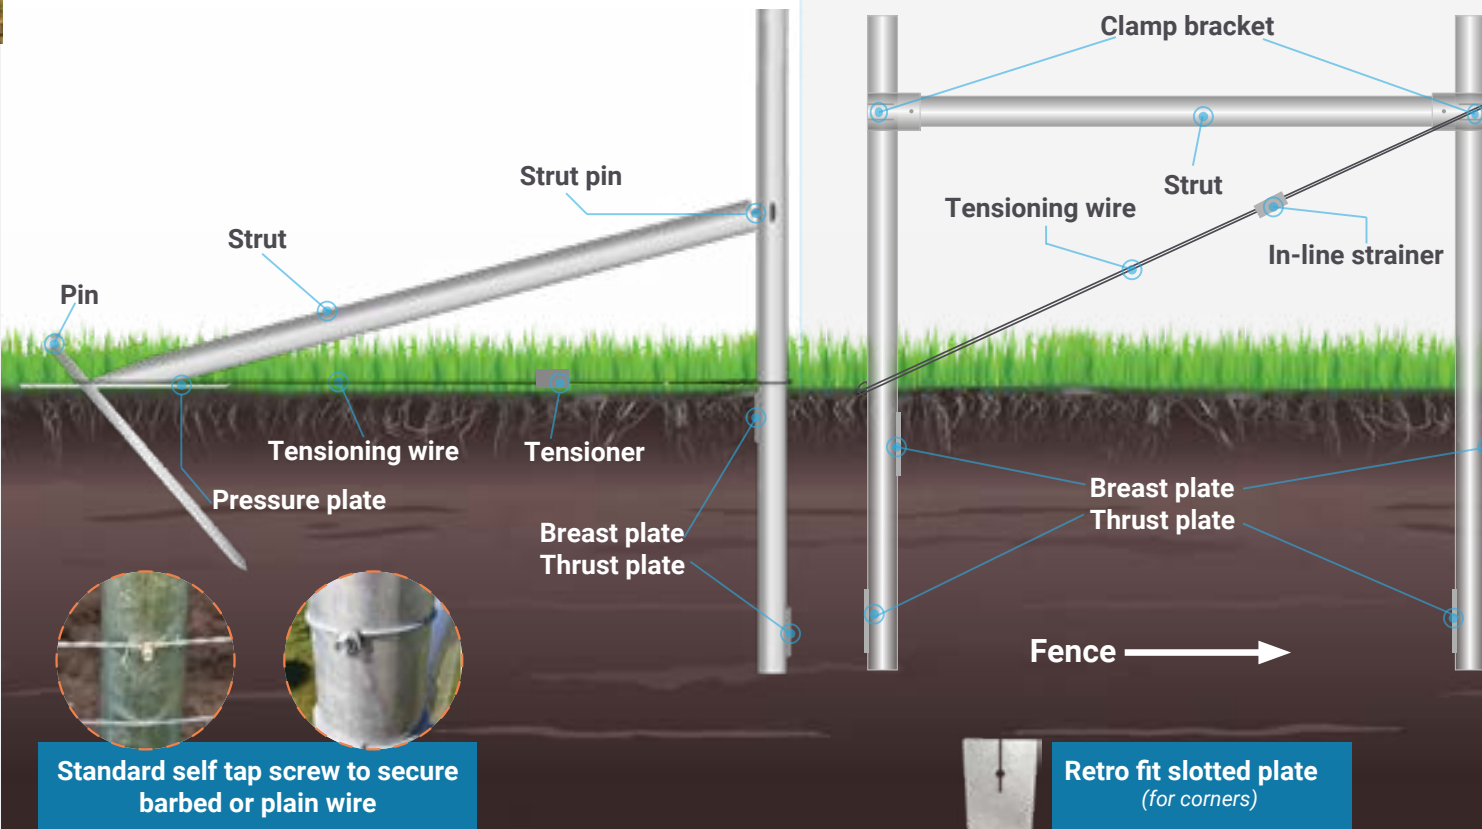

Strainer Components




STOCK FENCE	END STRAINER	CORNER/2 WAY	BOX END	BOX CORNER/ 2 WAY	ECO END
75mm x 2.4m c/w plates [1]	1	1	2	3	
50mm strut 2.4m, hook [2]	1	2			
60mm strut 3.05m [3]			1	2	
Plate 250mm x 6mm [4]	1	2			
Pin 750mm x 20mm dia [5]	1	2			
Tension wire c/w Gripple [6]	1	2	1	2	1
Corner slotted plate* [4]		1 (optional)		1 (optional)	
2.0m Beefy [7]					1
2.1m nib strut [8]					1
Beefy bracket [9]					1
Claw Clamps [10]			2	4	



DEER FENCE	END STRAINER	CORNER/2 WAY	BOX END	BOX CORNER/ 2 WAY	ECO END
75mm x 3.3m c/w plates [1]	1	1	2	3	
50mm strut 3.0m, hook [2]	1	2			
60mm strut 3.05m [3]			1	2	
Plate 250mm x 6mm [4]	1	2			
Pin 750mm x 20mm dia [5]	1	2			
Tension wire c/w Gripple [6]	1	2	1	2	1
Corner slotted plate* [4]		1 (optional)		1 (optional)	
Claw Clamps [10]			2	4	

*Can be added for additional ground support in softer soil

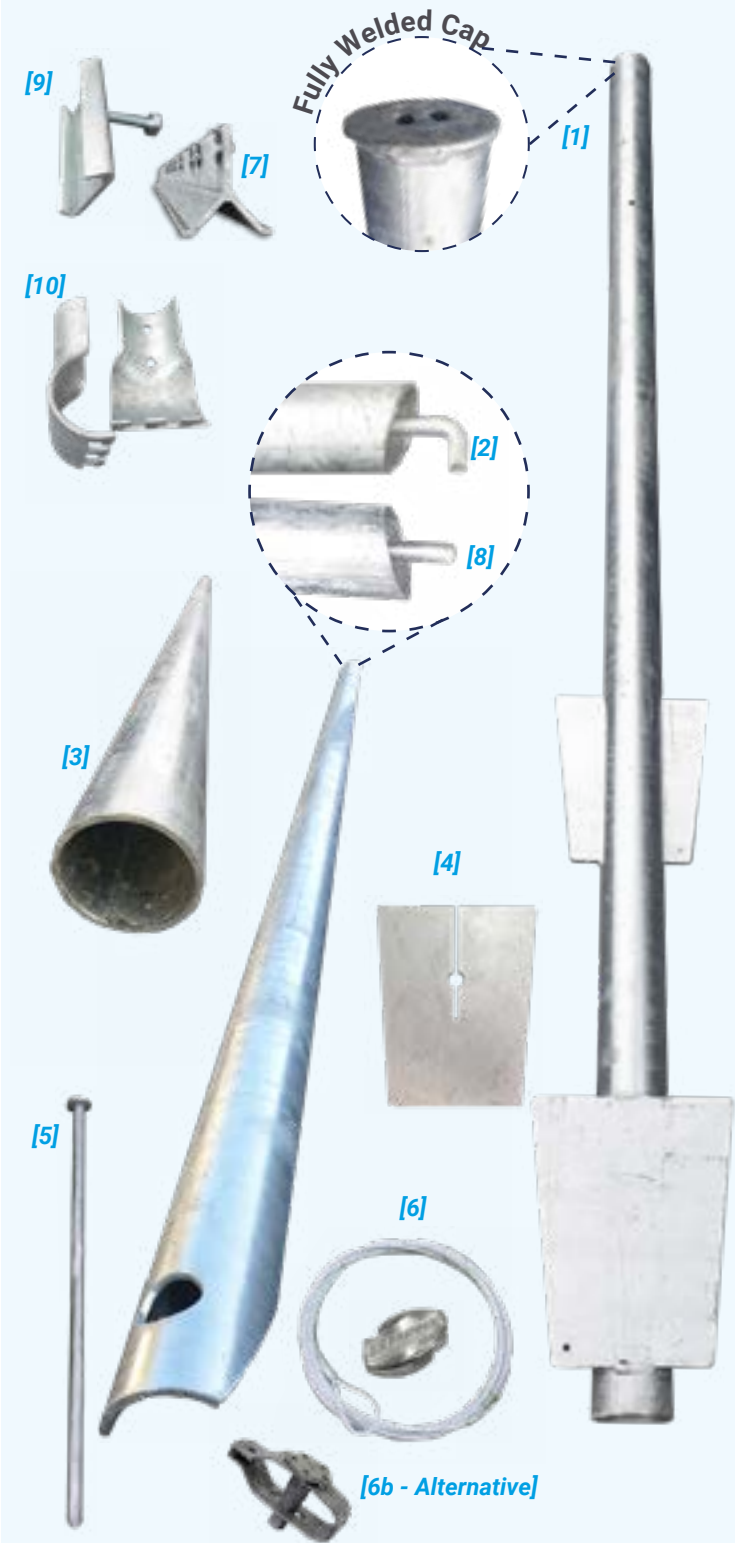



**Strainer installation -
using post hole digger,
auger or mechanically
driven**

FOR MORE ON TRIPLE X
INSTALLATION SEE PAGE 40



Did you know?

- One standard strainer can be installed in less than 5 minutes





LEAVE NOTHING TO CHANCE

'THE Original XFENCE®'

Superior corrosion resistance – More ductile – Exceptional strength in the knot and wire



Xfence® Premium Wire

Manufacturing

What separates Xfence from the rest, is that only the finest high-grade iron ore is sourced. This is turned into commercial billet, which is then sent to a world-leading processing plant to be turned into the premium quality wire used to make Xfence.

The wire is then twice coated with Zinc/Aluminium. Xfence's gas wipe coating process differs from other manufacturers as it allows an even spread of the Zinc/Aluminium layer. Often when coated, other methods can leave an uneven finish which allows for patchy wear and less time until rust appears. More common processes only use a zinc alloy coating for the wire, which doesn't provide comprehensive levels of protection as well as being less ductile and more prone to cracking when tying off. Xfence wire coating can give up to three times the lifespan of equivalent zinc coated wire.

“Possibly the **BEST** fabricated netting you can buy”




- Manufactured from highest quality primary metals
- 95% Zinc 5% Aluminium
- XTRALIFE coating, 24% stronger knot
- Smooth animal friendly abrasive free design forged X knot



- Tension curves absorb any pressure from climatic change or livestock pressure. Reduce the tension curves by 50% for visible tensioning
- 450mm pre-stripped ends, speeds up tying off time



- One piece uncut vertical wire
- Acts like its own intermediate, provides real strength & rigidity to the fence, almost self supporting
- Makes installation quicker

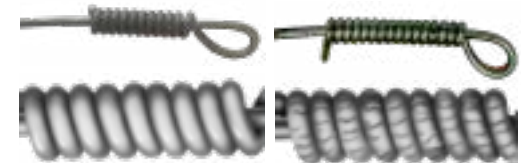

XTRALIFE

Heavy Galv

- XTRALIFE coating makes the wire more ductile, easier to work
- Resists cracking when tying off, unlike some heavy galv wire

Clipex compatible Xfence wire patterns



CODE	LENGTH	PATTERN	TENSILE
F2412	100m	XHT 8 - 80 - 15 Stock Fence	HT
F2414	300m		
F2415	100m	XHT 8 - 80 - 22 Lamb Fence	HT
F2419	300m		
F2422	500m		
F2416	100m	XHT 8 - 80 - 30 Stock Fence	HT
F2418	300m		
F2417	500m		
F24055	50m	XHT 11 - 122 - 15 Cattle/Railway	HT
F2405	100m		
F24062	50m	XHT 11 - 122 - 7.5 Horse/Poultry	HT
F24065	100m		
F2440	100m	XHT 13 - 190 - 15 Deer Fence	HT
F2441	100m	XLHT 13 - 190 - 15 Deer Fence (light)	LHT
F2448	100m	XLHT 13 - 190 - 7.5 Poultry/ Dogs/Deer (light)	LHT
F2450	50m	XHT 13 - 190 - 7.5 Boar/Poultry/Badger	HT

Other stocked items

CODE	LENGTH	PATTERN	TENSILE
F2400	50m	XHT 10 - 90 - 7.5 Horse	HT
F2401	100m		
F2402	50m	XHT 12 - 110 - 7.5 Horse	HT
F2403	100m		
F2404	50m	XHT 13 - 125 - 7.5 Horse	HT
F2406	100m		
F2408	50m	XHT 13 - 125 - 5 Foal//Horse	HT
F2410	50m	XHT 15 - 158 - 7.5 Badger	HT
F2411	100m		
F2424	100m	XHT 6 - 80 - 22 Game Bird Fence	HT
F2456	50m	XHT 19 - 180 - 5 Security/Tree Guards	HT
F2454	50m	XHT 17 - 190 - 7.5 Badger/Boar/Deer	HT
F2428	100m	XLHT 6 - 50 - 5 Apron fence/Otter/Poultry (light)	LHT
F2462	50m	XLHT 23 - 220 - 5 Hinged Apron Otter Fence	LHT

High tensile strength
1235mpa to 1550mpa




UNDERSTANDING THE CODES

Example: 8/80/15

8= Horizontal Wires

80= Fence Height (cm)

15= Distance between vertical wires (cm)

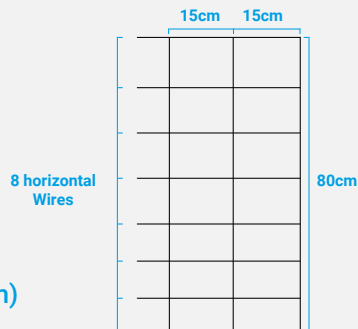

The British Standard EN10244-2 coating lists a sacrificial zinc coat of 230gr/m². Xfence exceeds these standards with Alu/Zinc alloy coating which offers extended life protection.

TYPE	NOMINAL - HORIZONTAL WIRES	VERTICAL WIRES	COATING
XLHT - X knot light (HT)	2.0mm - 1235/1550 (N/mm ²)	2.0mm - 850/950 (N/mm ²)	Alu/Zinc
XHT - X knot (HT)	2.5mm - 1235/1550 (N/mm ²)	2.5mm - 850/950 (N/mm ²)	Alu/Zinc

Barbed Wire



Barbed wire - we stock the traditional mild heavily galvanised steel twin strand barbed which is popular with farmers and landowners alike. We also stock high tensile barbed wire in hot dip galvanised and XTRALIFE alu/zinc coating, the 2.0mm twin strand barbed wire is fast becoming the barbed wire of choice due to its elasticity, it retains its tension over time.

**Heavily Galvanised BS EN 10244-2 Class A
Manufactured to BS EN10223-1**

Line Wire



Line wire - We stock various gauges of line wire in mild steel and high tensile, in hot dip galvanised and alu/zinc XTRALIFE finish. This smooth wire can be used in many applications with associated products such as Gripple wire tensioners, tension springs, electric insulators and ratchet winders.

Heavily Galvanised BS EN 10244-2 Class A

Mild tensile

CODE	GAUGE	LENGTH
F2115	2.5mm	651m
F2120	3.15mm	410m
F2125	4.0mm	254m

Tensile strength 350-550 N/mm²

Mild tensile Twin strand

CODE	GAUGE	LENGTH
F2000	2.5mm	200m

Tensile strength 415-495 N/mm²

High tensile Twin strand

CODE	GAUGE	LENGTH
F2014/F2015	2.0mm	200m/2000m
F2010	1.6mm	200m

Tensile strength 1000-1200 N/mm²

High tensile Twin strand ,XTRALIFE alu/zinc coated

CODE	GAUGE	LENGTH
F2012	2.0mm	200m
F2013	2.0mm	500m

Tensile strength 1000-1200 N/mm²

High tensile

CODE	GAUGE	LENGTH
F2104	2.0mm	1017m
F2140	2.5mm	651m
F2145	3.15mm	410m

Tensile strength 1250-1350 N/mm²

High tensile XTRALIFE alu/zinc coated

CODE	GAUGE	LENGTH
F2142	2.5mm	651m
F2147	3.15mm	410m

Tensile strength 1250-1350 N/mm²

Spring steel

CODE	GAUGE	LENGTH
F2160	2.65mm	620m

Tensile strength 1490-1690 N/mm²

Triple X 30 Year Service Guarantee

Clipex posts are manufactured in 3 gauges 2.5mm, 3.0mm and 3.5mm from high tensile 450 grade steel.

All the posts are hot dip galvanised exceeding British Standards with a coating over 600gm. The posts have aluminium self-locking clips with stainless steel springs and rivets. Combine these Clipex posts with Xfence wire netting and Triple X strainers and you have an unbeatable fence, which is backed by a 30 Year Service Life Guarantee, giving peace of mind that Triple X fencing will have a long service life, subject to routine maintenance and industry-standard installation.

The guarantee must be activated at the time of purchase by the original purchaser.

For full T&C's go to
www.mcveighparker.com/triple-x-guarantee





Case Studies



We believe that our exclusive Triple X fencing system is the way forward for a wide range of applications. We have many clients who have realised that the huge savings in time, money, and maintenance represents significantly better returns on their investment over traditional materials.

The following pages illustrate some of the wide variety of applications that our clients who have purchased the Triple X fencing system have put it to. From challenging terrain, security, livestock containment through to badger, otter, poultry and boar fencing. In all these examples the client was faced with a specific problem and Triple X has proved to be the best long lasting solution.



Watch case study video's online

www.mcveighparker.com/blog/category/case-studies/

NATIONAL TRUST 'OUT WITH THE OLD'

XHT8-80-22



The National Trust needed to replace their deteriorating original metal fence, which had stood for over 100 years. Aesthetic appearance, time and value for money were all considerations. The terrain was extremely challenging. The project required a product that would not only stand up to stock pressure but would be easier to transport and erect on site. Triple X fencing system was chosen as it solved all these problems.

Intermediate posts: 1.8m 11 clip Clipex Standard posts

Intermediate post centres: 4m centres for woodland perimeter and 3m for dividing paddocks

Beefy Intermediates: Used at slight changes in direction

Strainer Type: Triple X all steel diagonal strainer

Wire Type: Xfence premium long-life wire netting, XHT8-80-15, lamb friendly netting, 2.0mm high tensile heavily galvanised barbed wire

Tools Used: Hand-held petrol driver, cutters

CL2715	1.8m 11 clip Clipex intermediate Standard posts
CL2720	2.0m 11 clip Clipex Beefy posts
KCPX10	Triple X strainer 2.4m, ends c/w struts
KCPX20	Triple X strainer 2.4m, two way/corner c/w struts
F2412	XHT8-80-15 Xfence, 100m
F2014	2.0mm high tensile barbed wire, 200m



I initially rejected Clipex due to its light appearance and what I thought would be fiddly installation, I have been proved wrong. I have been very impressed how quickly it can be erected and combining Xfence and the Triple X strainers makes for a very strong fence. I certainly think it's going to be the future of fencing.

-Nathan of NB Fencing Services



LIVESTOCK TRIPLE X

XHT8-80-22



LIVESTOCK TRIPLE X

XHT8-80-22



Kent and East Sussex Railway needed to replace existing trackside fencing. The contractors were limited to working within the land owned by the railway. This meant all materials had to be delivered by train with no access for tractors, everything then had to be lifted manually and erected over a four mile stretch.

Intermediate posts: 1.8m 11 clip Clipex intermediate Standard posts

Intermediate post centres: 4.5m centres

Strainer Type: Triple X diagonal all steel strainer

Wire Type: XHT8-80-22 Xfence, high tensile barbed wire, baseline 2.5mm high tensile galvanised wire

We were persuaded initially by MP to do a trial run, we were so impressed we have never looked back. The Triple X system has saved us money and made our operation much more efficient. We have gone on to supply and erect for customers such as The Big Cat Foundation, Network Rail, Kent and East Sussex Steam Railway and many farmers in the South East. It certainly seems to be the way forward with many customers now requesting it.

- P.M.Tassell contractors

Contractor erected a livestock fence to separate an asparagus field from livestock.

Intermediate posts: 1.8m 11 clip Clipex intermediate Standard posts

Intermediate post centres: 4.0m centres

Strainer Type: Triple X diagonal all steel strainer every 150m

Wire Type: XHT8-80-22 Xfence, heavy galvanised HT barbed wire, baseline 2.5mm HT line wire



NATIONAL TRUST CISSBURY HILL

XHT8-80-22



LIVESTOCK TRIPLE X

XHT8-80-22



SUSSEX

Cissbury Ring, the most historic hill on the South Downs, is set high up on a chalk promontory. The National Trust required a fence with minimal ground disturbance due to the historic importance of the site, and would not be detrimental to the landscape. It also needed to last longer than current timber fences. Triple X fencing system was the preferred choice.

Intermediate posts: 1.8m 11 clip Clipex intermediate Standard posts

Intermediate post centres: 4.5m centres

Strainer Type: Triple X all steel strainer every 150m

Wire Type: XHT8-80-22 Xfence, high tensile 2.00mm barbed wire, baseline 2.5mm high tensile galvanised wire

We were worried about the shininess of the new posts, now the fence is up their small profile makes them almost invisible with the sun only really catching the struts, which will fade over time. We used a post driver on the straining post where we could and used a manual post driver for the rest. We had to use the existing post holes because of the monument status. All intermediates were hand driven.

- Mr Oliver, Head Ranger

SUSSEX DOWNS

Erected 1500m in 5 days, 2 men on challenging hilly terrain using Xfence stock net and electric top line.

Intermediate posts: 1.8m 11 clip Clipex Standard posts every 4.5m

Intermediate post centres: 4.5m centres


Beefy Intermediates: Used every 5th post

Strainer Type: Triple X diagonal all steel strainers

Wire Type: XHT8-80-22 Xfence, 2.5mm top electric line using Clipex insulators

LIVESTOCK EXTREME TRIPLE X

XHT8-80-22

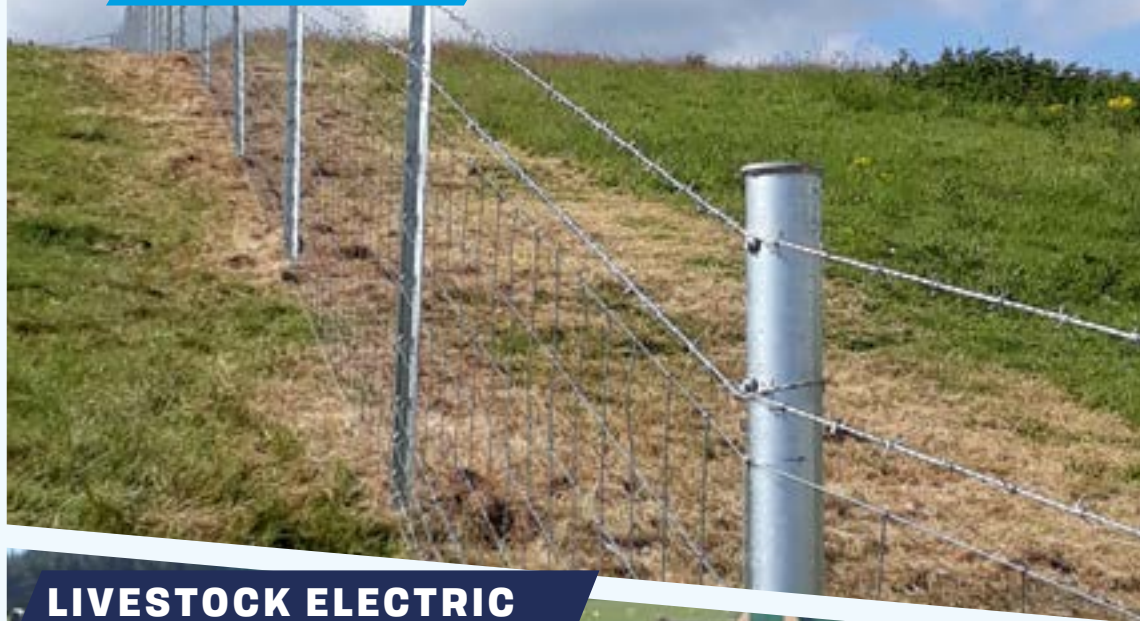

LIVESTOCK ELECTRIC TRIPLE X

XHT8-80-22



DORSET 

Extremely hilly terrain was the problem facing a fencing contractor. McVeigh Parker staff recommended the Triple X fencing system and initially assisted in the installation. Despite the contractors reservations he was very impressed with the end result.

Intermediate posts: 1.8m 11 clip Clipex Standard posts

Intermediate post centres: 4.5m centres

Beefy Intermediates: Every 5th post

Strainer Type: Triple X diagonal all steel strainers

Wire Type: XHT8-80-22 Xfence, 2.0mm HT barbed, 2.5 mm baseline

“
Easy to erect, fast and effective - The way forward
”

-R.Milne

SCOTLAND 

Replacement roadside stock fence in Scotland, the Triple X system was the fence of choice for the landowner.

Intermediate posts: 1.8m 11 clip Clipex Standard posts

Intermediate post centres: 4.5m centres

Beefy Intermediates: Every 5th post

Strainer Type: Triple X diagonal end all steel strainers every 100m

Wire Type: XHT8-80-22 Xfence, 2.0mm high tensile electric top line Clipex and permanent end egg insulators



RAILWAY/CATTLE TRIPLE X

XHT11-122-15




NATIONWIDE



Network Rail required a secure, long-lasting and low maintenance track-side fence that would prevent livestock incursion.

The Triple X fencing system ticked most of the boxes. Long-life, easy to transport to site, simple to install, strength where it matters, several alternative options to cope with various terrain, reduced health and safety requirements due to the lighter nature of the products meant fewer staff and less heavy machinery required. Also a real return on investment.

The Triple X fencing system was chosen and a fence pattern designed by Network Rail.

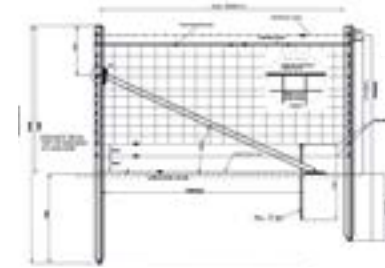

Network Rail and its chosen contractors have now installed many track side fences throughout the UK.

CLR2710	2.0m 13 clip Clipex intermediate Standard posts
CL2720	2.1m 13 clip Clipex Beefy Standard posts
KCPX10	Triple X strainer diagonal 2.4m, ends c/w struts
KCPX20	Triple X strainer diagonal 2.4m, two way/corner c/w struts
F2405	XHT11-122-15 Xfence, 100m (XHT11-122-7.5 for horse paddocks)
F2414	2.0mm high tensile barbed wire, 200m
F2140	2.5mm high tensile baseline
A1520	Gripples, medium
A1525	Gripple T clips
	Clipex Caps (<i>for use in horse paddocks</i>)

Network Rail have also designed a rapid response kit to deal with emergency repairs quickly.



KRRK



POULTRY FENCING TRIPLE X

XHT26-240-5



POULTRY FENCING BADGER TRIPLE X

XLHT15-158-7.5



The largest free range poultry producer in Southern England was looking to reduce their annual fence maintenance costs and create a secure fence for their farms. Manager Mr. G. Fuller used his past experience to design an Xfence netting pattern that he was confident would exclude predators. The Triple X system was chosen coupled with special cranks.

Intermediate posts: 3.0m 14 clip Clipex Standard deer posts

Clipex cranked arms & Clipex insulators

Intermediate post centres: 5m centres

Strainer Type: Triple X diagonal all steel strainers

Wire Type: Xfence XHT26-240-5 buried, 2.5mm high tensile support lines, clipex insulators

“We erected over 10.5km of fencing 1.95m above ground and 450mm buried, including an apron fold above, this was a challenging brief. We worked closely with McVeigh Parker on a fence design that would future proof our operations for many years whilst giving us a real return on investment. We are not having to walk the fence line frequently checking for predator incursion. This fence offers us real peace of mind and gives us security and a long-life fence.”

-G.Fuller Poultry Manager

Once again a leading egg producer required a long-life predator fence for their large poultry unit that was capable of protecting against badger and fox incursion. The customer's bespoke design was chosen using Standard Triple X fencing products.

Intermediate posts: 3.0m 14 clip Clipex Standard deer posts

Intermediate post centres: 5m centres

Strainer Type: Triple X diagonal all steel strainers

Wire Type: Badger Xfence XHT15-158-7.5 buried, 1.2m Hexagonal net clipped above, 2.5mm HT support lines + clipex insulators

Tools Used: Tractor, knocker and trencher


Use: Predator exclusion





POULTRY TRIPLE X

XHT13-190-7.5

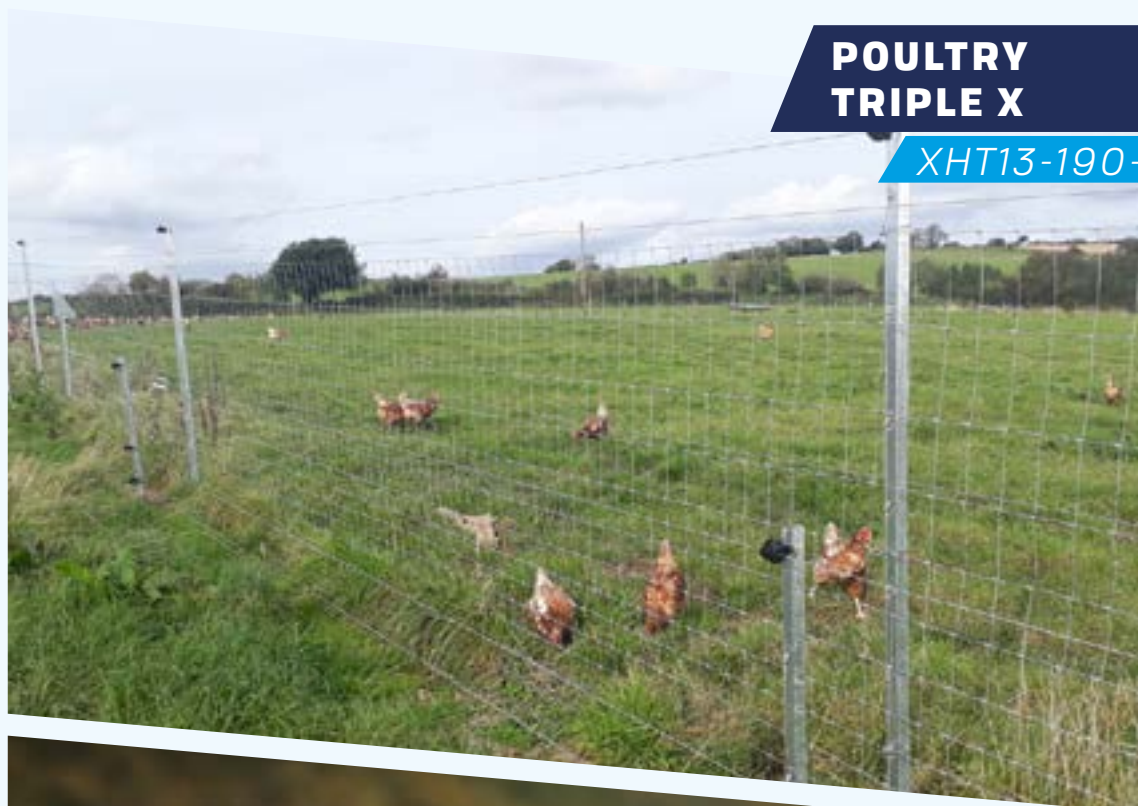

A free range poultry unit required protection from fox predation. High tensile hinge jointed poultry netting was chosen coupled with Clipex Deer and Pasture posts to form a protective enclosure.

Intermediate posts: 3.0m 14 clip Clipex deer posts, 1.5m 4 clip Pasture posts

Intermediate post centres: 6.0m centres

Beefy Intermediates: 3.0m 14 clip Clipex Beefy deer posts

Strainer Type: Triple X diagonal all steel strainers

Wire Type: HT13-190-7.5 hinge jointed, 2.0mm high tensile, electric lines plus separate three line external perimeter electric fence.

Use: Predator exclusion / poultry containment

I've used Clipex before for my livestock because I was fed up of just constantly re-doing timber fencing. Our new venture of 16000 laying hens - Clipex was the only way forward. Far less maintenance and so easy to erect.

-M.Brown, Free range chicken farmer



DOG TRIPLE X

XHT13-190-7.5



The remit was to fence off two large paddocks so dogs could roam free without escaping, also with such a high number of badgers there was a need to prevent any holes being made. The fence was trenched to provide a secure area. Clipex posts were used as the ground conditions were particularly difficult.

Intermediate posts: 3.0m 14 clip Clipex Standard deer posts

Intermediate post centres: 5m centres

Strainer Type: Triple X diagonal all steel strainer

Wire Type: Xfence boar wire netting XHT13-190-7.5, 2.5mm high tensile heavily galvanised top line.

Tools Used: Tractor, knocker, trencher, Clipex drive sleeve

Use: Badger exclusion / dog containment

SECURITY TRIPLE X

XHT19-180-5



Security Xfence XHT19-180-5 clipped to high tensile line wires. Using Standard and Beefy Clipex Deer posts and Triple X strainers. All products had to be carried and manually installed on site.

Intermediate posts: 3.0m 14 clip Clipex Standard posts

Intermediate post centres: 5m centres

Strainer Type: Triple X diagonal all steel strainers

Wire Type: Security Xfence XHT19-180-5, 2.5mm HT support lines

Tools Used: Manual petrol driver

Use: Person exclusion

SOLAR FARM TRIPLE X

XLHT13-190-15



VINEYARD PROTECTION TRIPLE X

XLHT13-190-15



GLoucestershire 

The client's request was to provide a secure fence for a newly developed solar farm. The fence specification had to have a desired life in excess of 25 years. The chosen design involved the cost effective long-life Xfence light deer wire netting with easy to install Clipex deer posts and one line of high tensile barbed wire. All products were standard and delivered within a week of the order.

Intermediate posts: 3.0m 14 clip Clipex Standard posts

Intermediate post centres: 3.5m centres

Strainer Type: Triple X diagonal all steel strainer

Wire Type: Xfence premium long-life lightweight wire netting, XLHT13-190-15, 2.0mm high tensile barbed wire

Tools Used: Tractor, knocker, Gripples, cutters, Clipex drive sleeve

Use: Deer/person exclusion

CL2725	3.0m 14 clip Clipex intermediate Standard posts
KCPX30	3.0m Triple X strainer ends c/w struts
KCPX40	3.0m Triple X strainer corner/two way c/w struts
F2441	XLHT13-190-15 Xfence light deer netting, 100m
F2010	2.0mm high tensile barbed wire, 200m
CL2790	Clipex drive sleeve, standard
A1520	Medium Gripples
A1525	Gripple T-clips

SUSSEX 

Vineyard protection fence was required for a recently planted vineyard to protect vulnerable saplings from deer predation. Land owner and contractor erected.

Use: Deer exclusion

DEER XFENCE

XHT13-190-15



KENT/SUSSEX BORDER 

Two landscape gardeners erected deer Triple X fence for the first time to exclude deer from a client's garden. They erected 2,000m in 10 days.

Intermediate posts: 3.0m 14 clip Clipex Standard posts

Intermediate post centres: 4.5m centres

Strainer Type: Triple X diagonal all steel strainer

Wire Type: XHT13-190-15 Xfence deer netting

Tools Used: Tractor, knocker, Gripples, cutters, Clipex drive sleeve

Use: Deer exclusion

DEER XFENCE

XHT13-190-15



OXFORDSHIRE 

Fencing contractor erected a road side deer fence on very stony terrain. The Triple X system was the ideal product for the job.

Design as above

CL2725	3.0m 14 clip Clipex intermediate Standard posts
KCPX30	3.0m Triple X strainer ends c/w struts
KCPX40	3.0m Triple X strainer corner/two way c/w struts
F2441	XLHT13-190-15 Xfence light deer netting, 100m
F2010	2.0mm high tensile barbed wire, 200m

Use: Deer exclusion

Very knowledgeable salesman guided me through all the products and provided excellent service. The fence was exceptionally quick to erect, we have now started renewing all the fences on the farm"

- Oxfordshire farmer



LIVESTOCK X KNOT FENCE

XHT8-80-22



HORSE FENCING X KNOT FENCE

XHT11-122-7.5



KENT



The Environment Agency needed a long-life fence capable of containing livestock from breaching the flood defence bund, once again McVeigh Parker provided the answer.

Beefy Intermediates: 2.0m 11 clip Clipex posts used throughout

Intermediate post centres: 2.0m centres

Strainer Type: Pressure creosoted pine strainers

Wire Type: Xfence stock wire netting XHT8-80-15, 2.0mm high tensile heavily galvanised barbed wire, 2.5mm galvanised baseline

Tools Used: Tractor, knocker, cutters, Clipex drive sleeve, stapler

SHROPSHIRE

The remit for this large horse rescue centre was to provide a fence that would reduce maintenance, prevent cribbing, last longer than current timber fencing whilst containing the horses safely. Triple X system using Xfence XHT11-122-7.5 horse netting with Clipex caps and premium Diamond Brand green electric tape.

Intermediate posts: 2.0m 13 clip Clipex Standard posts

Intermediate post centres: 3.5m

Beefy Intermediates: Used every 6th post

Strainer Type: Triple X diagonal all steel strainer

Wire Type: Horse Xfence XHT11-122-7.5, Clipex post cap insulators, end/corner reinforced tape insulators, 20mm green premium electric horse tape



DEER FARM XFENCE STOCK FENCE

XHT13-190-15



Well-known for his world record sheep shearing exploits, McVeigh Parker customer and farmer Matt Smith needed a long-lasting deer containment fence. Clipex Beefys coupled with Xfence wire were his first choice and Matt then installed the fence himself whilst continuing to farm.

Beefy Intermediates: 3.0m 14 clip Clipex deer Beefy posts used throughout

Intermediate post centres: 8m

Strainer Type: Customer used reclaimed box beam crash barrier

Wire Type: XHT13-190-15 Xfence deer netting

Tools Used: Tractor and knocker, crimps, clamp bar and staples - two men

Use: Deer containment



“The speed to put up this fence is phenomenal once you understand it. Two of us put up twelve thousand metres of deer fencing in under three months whilst continuing to farm and shear. We wanted a long-lasting fence, there really was only one choice, quality NZ wire with Clipex steel posts, it proved to be time and cost effective to erect, a great system, even if half is from Oz!”

-NZ born, M.Smith

TREE PLANTATION DEER PROTECTION

XLHT13-190-15



RABBIT NETTING HEX WIRE NETTING

ON HT LINE WIRE



BERKSHIRE 

One of the largest Christmas tree growers in the UK required protection from deer and rabbits on their new plantation. Light Xfence and hexagonal rabbit netting erected on Clipex deer posts were chosen as the best option.

Intermediate posts: 3.0m 14 clip Clipex deer Standard posts

Intermediate post centres: Every 4.5m

Beefy Intermediates: Beefy 3.0m 14 clip bespoke Clipex posts were used every 4th post to strengthen the fence

Strainer Type: Triple X diagonal all steel strainers

Wire Type: XLHT13-190-15 Xfence light deer netting, 1050mm super 6 heavy gauge hexagonal wire netting at the base

Use: Deer exclusion

KENT 

The landowner wanted a rabbit fence that would be supported for many years, he had opted for heavy gauge Super 6 hexagonal rabbit wire netting but wanted longer life posts to support it. Clipex Standards with two high tensile support wires and two rows of barbed were his chosen product.

Intermediate posts: 1.8m 11 clip Clipex intermediate Standard posts

Intermediate post centres: 5m - 6m

Strainer Type: Chestnut strainer ends

Wire Type: 18g rabbit netting using high tensile line wire, 2.0mm galvanised barbed wire

Use: Fishery protection

RED DEER FARM XFENCE DEER

XHT17-190-15

A challenging brief to fence in Red Deer around the client's estate, as well as exclude the smaller breeds such as Muntjac. The fence had to have a desired life in excess of 25 years. The chosen design involved the long-life Xfence wire netting with long-life Clipex steel posts and two lines of electric wire.

Intermediate posts: Bespoke design 3.0m 18 clip Clipex Standard posts

Intermediate post centres: 4m centres (special design, MOQ 2000)

Beefy Intermediates: Beefy 3.0m 18 clip bespoke Clipex posts were used every 4th post to strengthen the fence

Strainer Type: Customer used reclaimed telegraph poles

Wire Type: Xfence premium long wire netting, 17 line, 190cm high, 15cm wide verticals was the wire of choice. 2.0mm high tensile heavily galvanised electric lines

Tools Used: Tractor and knocker, crimps, clamp bar and staples - two men

Special	3.0m 18 clip Clipex bespoke intermediate Standard 3.0m 18 clip Clipex bespoke Beefy posts
F2444	XLHT17-190-15 Xfence, 100m
F2014	2.0mm high tensile plain galvanised wire
CL2790	Clipex drive sleeve, standard
CL2793	Clipex drive sleeve, Beefy
EF2055	Clipex insulators
EF2120	Wire offsets 30cm

Use: Deer containment





SEMI-PERMANENT ELECTRIC FENCE DESIGN

HT LINE WIRE



Realising pasture potential - UK farmers are looking to optimise their pasture land, Clipex posts have the answer.

The Clipex Pasture post system has been designed to facilitate the growing market for managed intensive rotational grazing. Resting grazed land allows the vegetation to renew energy reserves, rebuild shoots and deepen the root systems, with the result being long-term maximum biomass production.

McVeigh Parker have combined the very best products to provide a simple long-life electric fence solution. Pasture posts come in an Eco and Beefy profile, neither have anti lift plates allowing them to be relocated easily. Clipex insulators are easily retrofitted to these four clip posts, the clips are suitably spaced to allow you to install a one, two, three or four line system subject to your livestock type.

The posts can be used to create a permanent ring fence with semi-permanent dividing paddocks to allow for rotational grazing or combined with other pasture control systems to provide a stronger, longer lasting fence. Coupled with our range of Gallagher energisers and fittings this is a simple fencing system that enables easy management of stock.

Pasture posts are also ideal for temporary rabbit fencing or simple demarcation line wire fence.

Intermediate posts: 1.5m 4 clip Clipex Eco and Beefy Pasture posts

Intermediate post centres: 6m -10m centres

Beefy Intermediates: At slight change of direction/ends

Wire Type: High tensile line wire, Clipex insulator



“Clipex has enabled us to permanently fence areas we were unable to with traditional fencing. We have now got a ring fence around the entire farm something we had not tackled in the past due to the limited access for machinery on the steep downland we graze.”
- S.Cath at West Woodhay

Line wire systems

Clipex heavy hot dip galvanised posts have pre-set clips to match various wire patterns however this doesn't restrict their use. Clipex posts are quick and easy to install, provide a strong long-lasting fence and can be used on various different projects using a simple line wire system. Strain three or four support wires and clip them into your chosen spacings on the posts, then your choice of wire netting can easily be clipped to the support wires. This type of fencing system is especially useful when installing a fence line that needs to be trenched in or has a closer mesh pattern.




“One Long-Life Post
- Many Options”



XFENCE SPECIAL



HEXAGONAL NETTING

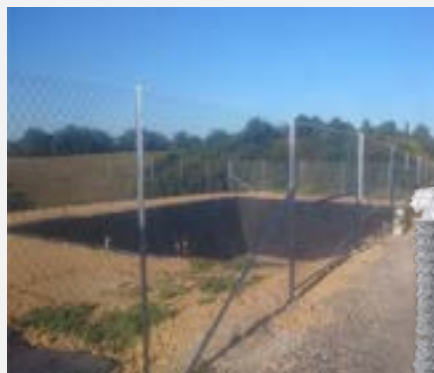

CHAIN LINK



WELDED MESH

Line wire alternatives



SEMI-PERMANENT ELECTRIC FENCE DESIGN

HT LINE WIRE

Wallow Artisan Charcuterie, Guernsey opted for Clipex for their new vocation, breeding pedigree free range pigs to create some of the finest locally produced charcuterie.

Intermediate posts: 1.5m 4 clip Clipex Pasture posts

Intermediate post centres: 6m centres

Wire Type: High tensile line wire

Strainer Type: UC4 timber

We had tried timber posts which tended to be hard to install and failed prematurely. Clipex allowed us the time to build our business rather than fencing. It's quick and easy to erect, and they can be moved to suit the rotation required with our paddock control.

-M.Terry,

GUERNSEY



FLOODPLAIN FENCE DESIGN

HT LINE WIRE

The Till river project involved installing approximately 850m of new fence. The site was on the flood plain meaning traditional fencing could not be used. Because of the speed and ease that it could be erected; the perfect solution was Triple X using a single wire system instead of netting. Clipex steel posts, insulators and three strands of electric wire were quickly put up, designed to protect the river bank from further livestock damage, allowing the ground to stabilise and vegetation to re-grow. This enabled the landowner to plan a short cycle rotational grazing system, maximising the land value.

Fixings: Clipex insulators, ratchet winders

The Triple X system allowed quick and easy erection of new fence lines using wire, stock net or electric lines simply clipped onto steel posts. TRRS has worked closely with the landowner and McVeigh Parker to develop a bespoke specification for a floodplain site.

- Project Officer for The Tweed Forum

NORTHUMBERLAND



LINE WIRE FLOOD FENCE

HT LINE WIRE

After years of replacing timber posts, clearing debris off the netting, tensioning and repairing the fence after regular flood damage, the landowner looked at alternatives. A simple 8-line fence with ratchet tensioners at either end, allows the tension to be taken off, then the lower line wires can be simply moved up and out of the way of flood damage. In the spring, Clipex insulators can be attached easily to the posts and the fence electrified.

Intermediate posts: 1.8m 11 clip Clipex Standard posts

Fixings: Clipex insulators, ratchet winders

After our initial trial with Clipex using the stock fence system we have now used a line wire system on a flood plain area of the estate and the deer fence posts for a large pheasant pen through part of our woodland. The ease of use, lightweight nature of the posts and speed of installation along with the 30 year guarantee now makes this our choice for all types of fencing on the estate.

- J. Freestone at Overbury.

GLOUCESTERSHIRE



BESPOKE HOP POSTS DESIGN

HOP NETTING

Clipex bespoke hop posts have been designed for the hop market, the smaller profile enables easier harvesting, whilst the strength and galvanised finish give a longer maintenance free life. The post was designed with a self-locking top clip to prevent the harvester hooking out the top wire when picking the hops, then a ground base clip to take the base wire so the synthetic netting can be tensioned between the two.

Beefy Intermediates: Bespoke 4.5m 2 Clip Beefy posts

Beefy post centres: 7m centres

Wire Type: Synthetic netting

KENT



“My reason for opting for Clipex all steel posts was quite simply the life expectancy of over 30 years, an initial investment but thereafter maintenance is greatly reduced. The smaller profile made installation easier, we did not require heavy machinery thus reducing ground compaction. The larger Beefy profile has proved very successful, so much so that I plan on renewing my old chestnut poles with Clipex.”

- R. Humphreys, Kent Hop Grower



BESPOKE CONTRACTOR DESIGN

HT LINE & BARBED

Customer wanted a cost effective livestock fence. He designed his own posts to suit line wire and netting. Minimum bespoke order 2,000 posts.

Intermediate posts: 1.8m 12 clip Clipex Standard posts

Strainer Type: Creosoted strainers

Wire Type: 2.5mm high tensile line wire, 2.0mm high tensile barbed wire

DORSET

Dropper Line Wire Systems



Clipex posts coupled with droppers and single strand wire can create a very cost effective strong and versatile fence.

Intermediate posts can be spaced further apart saving on overall material and labour costs, droppers can be retro-fitted easily. Combined with tension springs and ratchet winders, this single strand fence can cope with all climatic changes whilst still retaining its tension. Various dropper designs available, in steel, timber, wire, electric and plastic.



Photos courtesy of Morgan fencing

Adaptable to Your Requirements

Clipex is unrivalled in its versatility. McVeigh Parker offer five different patterns in five different lengths and is available in 2.5mm, 3mm and 3.5mm thick gauge. Extensions can be added at its base or top to extend by 510mm. This makes Clipex very adaptable, many problems can be solved with the Clipex solution. The Clipex self-locking clip sits inside the post preventing any damage when being driven in.

Did you know?

- The 4 stroke petrol driver has a high impact hammer action of 1720 beats per minute and only weighs 15.3kg, making it ideal for one man operation, even in the most challenging terrain



SEE PAGE: 43 for full spec

Installing could not be simpler...

Manually

- Post bumper designed to suit both Standard and Beefy intermediates
- Post hole diggers are ideal to manually install strainers (Not essential but strainers can be concreted in)

Petrol driver

- The perfect partner for the Triple X all steel system, supplied with specific adaptors to suit Clipex Standard and Beefy posts.
- 1720 percussions per minute ensure a steady and direct hit every time, enabling Clipex posts to be installed into some of the harshest ground conditions



Mechanical attachments

- There are various hydraulic and pneumatic vibrating head attachments on the market that can be attached to any mini excavator, the simple percussion hits make them ideal for Triple X fencing installations

Tractor and track mounted post drivers

- These large bits of kit are ideal for strainers, dispensing wire and transporting product, if using on intermediate posts we recommend a slow percussion hit



Installation



Step 1
Secure your corner/end strainer



Step 2
Tie off wire netting both ends and tension to middle until upright and taut



Step 3
Place Clipex posts between vertical wires at even spacings then drive in



Step 4
Push the wire into the slot putting pressure on the keeper




Step 5
Push the wire down, the keeper will automatically close




Step 6
Finally tension fence to allow tension curves to reduce by 50%, Job done!

Strainer tie offs

Traditional

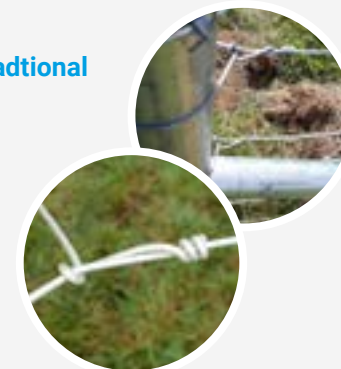

Crimps

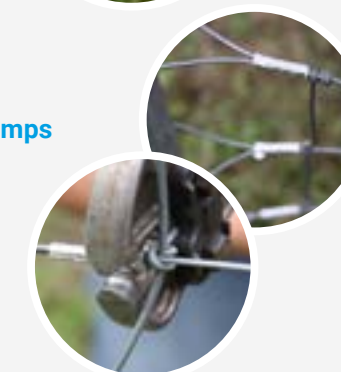

Gripple



Wire Joining

Traditional



Crimps



Gripple



Product Guide

CLIPLEX INTERMEDIATE POSTS	WIRE	LENGTH	GAUGE	CODE
Clipex "Pasture" Post 4 Clip	Single wires	1.5m	2.50mm	CL2705
Clipex "Pasture" Post 4 clip, Beefy	Single wires	1.5m	3.5mm	CL2708
Clipex Eco Post 10 clip	Hinge joint	1.8m	2.50mm	CL2710
Clipex Standard post 11 clip	X knot	1.8m	3.00mm	CL2715
Clipex Standard 'Rock' post 11 clip	X knot	1.5m	3.00mm	CL2716
Clipex Beefy post 11 clip	X knot	2.0m	3.50mm	CL2720
Clipex Railway/Cattle Standard post 13 clip	X knot	2.0m	3.00mm	CLR2710
Clipex Railway/Cattle Beefy post 13 clip	X knot	2.1m	3.50mm	CLR2720
Clipex Deer Standard 14 clip	X knot	3.0m	3.00mm	CL2725
Clipex Deer Beefy 14 clip	X knot	3.0m	3.50mm	CL2730
Clipex Beefy strut bracket	-	-	-	CL2765
Clipex 51cm Standard offset 3 clip	-	-	-	CL2766
Clipex 51cm Beefy offset 3 clip	-	-	-	CL2767
Clipex Standard 4 bolt ext bracket	-	-	-	CL2768
Clipex Beefy 4 bolt ext bracket	-	-	-	CL2769

CLIPLEX

EMERGENCY FENCE REPAIR

Did you know?

- Clipex posts can be used as an emergency repair or to shore up existing post failures

"Always have some posts in stock with Gripple wire joiners for those late night emergencies"



TRIPLE X STRAINERS	LENGTH	GAUGE	CODE
Triple X Diagonal End Strainer Stock	2.4m	3.0mm	KCPX10
c/w 1 x Triple X strut stock assembly	2.4m	3.0mm	
Triple X Diagonal Corner/Two Strainer Stock	2.4m	3.0mm	KCPX20
c/w 2 x Triple X strut stock assemblies	2.4m	3.0mm	
Triple X Box End Strainer Stock	2.4m	3.0mm	KCPX10
c/w 1 x strut & claw brackets			
Triple X Box Corner/Two Strainer Stock	2.4m	3.0mm	KCPX20
c/w 2 x struts & claw brackets			
Beefy End Economy Strainer Stock	2.0	3.0mm	KCPX15
c/w Beefy 2.0m, 2.4m SFS GPAK3, pin & plate, strut bracket			
Triple X Diagonal End Strainers Deer	3.0m	3.0mm	KCPX30
c/w 1 x Triple X strut deer assembly	3.0m	3.0mm	
Triple X Diag Corner/Two way Strainers Deer	3.0m	3.0mm	KCPX40
c/w 2 x Triple X strut deer assemblies	3.0m	3.0mm	
Triple X Box End Strainers Deer	3.0m	3.0mm	KCPX30
c/w 1 x strut & claw brackets			
Triple X Box Corner/Two way Strainers Deer	3.0m	3.0mm	KCPX40
c/w 2 x struts & claw brackets			



Accessories & Tools

Clipex Insulator

EF2055



Exceptionally strong insulator with a stainless steel pin that can be quickly attached to both wire and the Clipex post.

- Quick and easy to install, can also be retro fitted
- Strong durable long lasting UV protected plastic
- Suitable for wire, polywire, electric rope

End Strain Insulator

EF2020



EF2010

For semi-permanent electric fencing

This extremely strong strain insulator allows you to keep tension on even the longest fence. It's an important aid in constructing a robust electric fence.

- Suitable for high tensile galvanised wire
- Super strong - made from polycarbonate
- Can be used as either an end or corner strainer
- Ideally suited in long permanent runs

Clipex Post Caps

STANDARD: EF2058

BEEFY: EF2059



Enable the Clipex posts to have further electric lines at the side and on top of the post, whilst also protecting livestock from possible injury.

- Quick and easy to install, can also be retro fitted
- Inbuilt offset insulator to take rope or tape
- Smooth rounded top for safer stock handling

Clipex Bolt on Offset Insulator

EF2052



With an electrified tip and zero power leakage through the post, the live tip offsets are an effective, new option for protecting existing fences.

- Quick and easy to install, can also be retro fitted
- Electrified tip which discourages rubbing
- Unique patented lockset design for solid attachment

Permanent end or in-line wire tensioner

EF4097



- NZ made Cliplock wire strainer
- Smooth clicking action
- Easily operated upside down
- Oval hole in the spool for joining two wires
- Die-cast aluminium spool with a galvanised steel frame

Tension Springs

EF5010



Help by retaining elasticity in climatic changes. This simple spring prevents your line wire systems from sagging.

- Suitable for most gauges of HT wire up to 2.5mm
- Maximum tension strength 200kg
- Can be used in-line or at the end of a fence to maintain fence tension

Vertical Extensions and Brackets


- Any Clipex post can be extended above to take 3 rows of barbed or plain wire or below ground to extend the post, especially important when fencing in softer ground
- Extend the height or depth of your clipex post
- Adaptable extension can be retro fitted to take, barbed, plain or electric wires

Standard extension 51cm/3 clip - CL2766

Beefy extension 51cm/3 clip - CL2767

Standard 4 bolt extension bracket - CL2768

Beefy 4 bolt extension bracket - CL2769

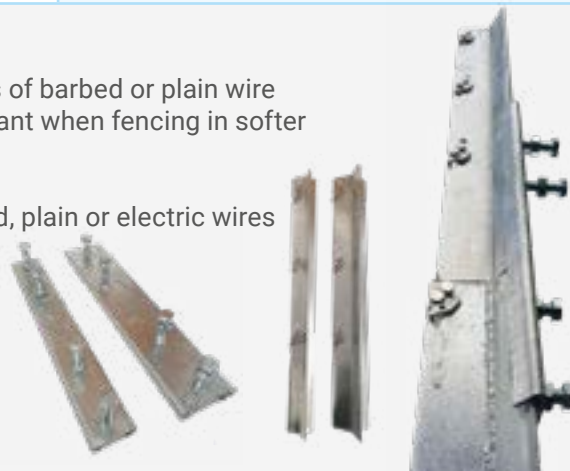

Cranked Extensions

We have designed various cranked arm options to take apron fold netting, electric lines or barbed wire.

For more details please contact us with your requirements.



Corner and end cranks

Post Driver Sleeve

STANDARD: CL2790
BEEFY: CL2793



- This driver sleeve protects the top of the post whilst driving in manually or mechanically

Post Hole Bumper/Rammer

A2428



- 80mm o/d dia galv two handled post bumper/knocker
- Manually operated by one or two persons.
- Weight approx. 12.8 kg

Petrol Hand Held Post Driver

CL2795




- Supplied with multi adaptor, Clipex compatible
- Designed to knock any size stake, peg or post into the ground, up to 100mm dia
- Lightweight, only 15.3kg



Ezepull Ultra 5:1

A2247

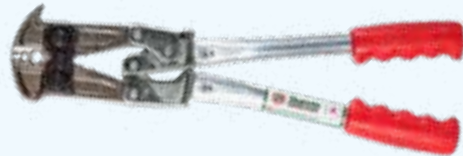

- Featuring strong double action leverage which ensures superior crimping exceeding the tensile strength of the wire

Gripple Contractor Tool

A1518



- 10:1 mechanical advantage, meaning you can apply the same tension with a lot less effort
- Gear driven, long handles for increased leverage
- 590mm long x 180mm wide x 35mm

Gripple Tensioning Tool

A1510



- Tension wire up to 400kg
- Minimal effort due to the 6:1 gear drive mechanism
- Works on all Gripple units up to a 6mm diameter
- Easy to use and lightweight for repetitive tensioning

Strainrite Crimps



- 4-5 times faster with Ezepull fencing tool
- Water resistant grit adhesive for all weather application
- Electric and barbed crimps also available



Shop full range online


Gripple Wire Joiners

Small 50 per bag
A1512

Medium 20 per bag
A1520

Jumbo 10 per bag
A1540

Barbed 10 per bag
A1530



Gripple T-Clips

T-Clip 20 per bag
A1525

Barbed T-Clip 10 per bag
A1527



Rapid 22 Netting Gun & Clips

PLIERS: A1145

CLIPS: A1146



Open: 20mm
Closed: 10mm

- ABS with glass fibre
- Spring loading cartridge
- Cartridge capacity 50 pre-formed clips
- Hog ring diameter 5-11mm

RP22 Netting Gun & Clips

PLIERS: A1210

CLIPS: A1222/A1224



Open: 19.05mm
Closed: 6.35mm

- All steel design
- Cartridge capacity 50
- Spring loaded cartridge
- Triangular ring diameter 6-8mm

Wire Twister

A1800



- This simple tool makes neat spiral wraps, it's especially good when in tight spaces
- Left or right handed twisting
- The must have tool for every toolbox

Knipex Cutters

A2043



- Suitable for soft and hard wire up to 5.2mm
- Recess cutting edge
- Cuts spring steel up to 3.6mm

Multi Fence Pliers

A2000



- An essential tool for fence installation
- Head incorporates a striking face
- Pincer and clamp on top jaw
- Straining and twisting wire and two shear type wire cutters

Collapsible Spinning Jenny

A2201



Please note:
wire not included

- Simplest way to uncoil high tensile steel wire for permanent fence runs, without tangling or jamming
- Adjusts to most wire coil sizes
- Folds up for easy carrying

Boundary Clamp

STANDARD (1m): A2220

HORSE (1.30m): A2225

DEER (2.0m): A2230


SPARE WEDGES: A2232



- High tensile steel
- Highly visible orange
- Suits standard stock fence
- Connected quick apply/release wedges
- Left/right handed operation

Hook Chain Strainer

A2210



- Easy to use
- Consistent tension held every time
- Longer length chain to allow for easier tensioning

Wire Grab Chain Strainer

A2215



- Swivels for left or right hand operation
- Compatible with single or barbed wires, from wire dia - 1.6mm to 5.0mm
- Chain - 4m standard tested chain

Triple X FAQs

1. Will Clipex posts fit any wire netting?

A: We have a post to suit most hinge jointed 8/80 fences in either HT or mild whatever the brand. (Please check when ordering as some manufacturers have slightly different mesh spacings). We also have posts designed to suit our X knot stiffstay netting which offer greater returns on investment.

2. Are Clipex posts permanent?

A: Yes, they have been re-designed with anti-lift plates for the European market, making them virtually impossible to remove by hand. Clipex galvanised coating and high tensile steel will provide a life in excess of 30 years, we consider this to be permanent.

3. What post spacing is required?

A: This is subject to the wire used and livestock pressure. Mild hinge joint requires around 2.4metres, high tensile hinge joint at 3.5m centres, X knot stiffstay wire 4.0m to 6m centres, obviously, the latter will save time, money, materials and labour, and provide a stronger longer lasting fence.

4. Can it be removed/stolen easily?

A: No, the Beefy especially has a larger profile and additional length making it virtually impossible to remove without the aid of machinery. We have designed the product with an anti-lift plate, which not only aids erection when going over undulating ground, it acts as a strong deterrent to any thieves. If additional protection is required in high population areas a simple security plate (CL2770) can be added.

5. Can it be used for permanent electric fence or line wire?

A: Yes, all Clipex posts can be used for line wire fences then simply converted to electric by adding the unique Clipex snappy insulator or using the Clipex electric post cap. We also manufacture a pasture post which doesn't have the anti-lift plate which makes it suitable for semi-permanent electric fencing for sheep, pigs or cattle. Any post can be used to create a line wire and dropper system.

6. How do Clipex posts compare against creosoted, kiln dried, redwood timber?

A: Lighter to handle, no carcinogenic leaching, easier to drive in, easier to clip wire in, no stapling required, easier to transport, and on price marginally more, however 50% lifetime savings are achievable.

7. Does the wire rub in the slot scratching the galvanised coating?

A: If the fence is kept taut this should not be an issue, if you have an adjoining fence line that is going to receive a lot of attention it is advisable to use an alu/zinc coated netting such as Xfence as this wire has a sacrificial coating should any wire get exposed.

8. Will the post just pop out of the ground especially when the ground is dry?

A: McVeigh Parker have improved the Australian design to suit the European environment, more clips have been added which means more wires are held in place, importantly an anti-lift plate reduces the possibility of the post popping out or being easily removed. It increases the holding of the post, especially on undulating ground. .

9. How do I protect my animals from harming themselves on the post?

A. The easy to install Clipex electric post cap slots over the top of the post, an anti-lift clip prevents removal by livestock. It not only offers a smooth non-abrasive surface but also the facility to add an electric line within its construction.

For full FAQs please visit
www.mcveighparker.com/triple-x-faqs

Berkshire Branch

Southend, Bradfield, Reading
RG7 6HA
Tel: 01189 744777
Email: berks@mcveighparker.co.uk

Cambridge Branch

Caxton Depot, Ermine Street, Caxton
CB23 3PG
Tel: 01954 714110
Email: cambs@mcveighparker.co.uk

Devon Branch

Five Bridges, Willand Road, Cullompton,
Devon, EX15 1QP
Tel: 01884 824486
Email: devon@mcveighparker.co.uk

Kent Branch

Thornden Farm, Lenham Road,
Headcorn, TN27 9LH
Tel: 01622 891095
Email: kent@mcveighparker.co.uk

Lancashire Branch

Park Lane Industrial Estate, Wigan Road,
Ashton-In-Makerfield, Wigan, WN4 0BZ
Tel: 01942 725523
Email: lancs@mcveighparker.co.uk

Scotland Branch

Market Road, Biggar, Lanarkshire
ML12 6FX
Tel: 01899 221150
Email: scotland@mcveighparker.co.uk

Sussex Branch

Stane Street, Billingshurst
RH14 9JR
Tel: 01403 784250
Email: sussex@mcveighparker.co.uk

Worcestershire Branch

Unit 16 Wilden Lane Ind. Estate,
Stourport on Severn, DY13 9JY
Tel: 01299 826111
Email: worcs@mcveighparker.co.uk



Key account manager and trade enquiries contact
trade@mcveighparker.co.uk

Go online now
www.mcveighparker.com
sales@mcveighparker.co.uk

McVeigh Parker

McVeigh Parker landscaping the future with Triple X all steel permanent fencing system.

The unique intermediate Clipex posts are lightweight, exceptionally strong, very fast and easy to install. Combined with Xfence wire netting and Triple X all steel strainer posts make a formidable fence.

The posts are much more durable than traditional timber posts, in most cases a three to four times longer service life, and this means the whole system is very cost-effective.

Huge savings in time, labour and machinery are possible.

WE DELIVER ON

Price

Quality

Service

Experience

Innovation

TRIPLE X
Spec sheet available
to download online





Tel: +44 (0) 3330 050115

sales@mcveighparker.co.uk

www.mcveighparker.com

www.mcveighparker.com/triple-x-fencing

© McVeigh Parker reserve the right to change any specification and alter design without notice.
All specifications are correct at time of going to print. E&OE.



[/McVeighParker](https://www.facebook.com/McVeighParker)



[@McVeigh_Parker](https://twitter.com/McVeigh_Parker)



[mcveigh_parker_est1979](https://www.instagram.com/mcveigh_parker_est1979)