




GRIPPLE PLUS RANGE

SPECIFICATION SHEET

The Gripple Plus range of wire joiners and tensioners is suitable for all fencing applications.

Features/Benefits





- Join and tension in one
- Eliminates tying and knotting wires, reducing installation time
- Ideal for use on high tensile and mild steel wire
- Designed for high load holding and corrosion resistance
- Easily re-tensioned year-after-year

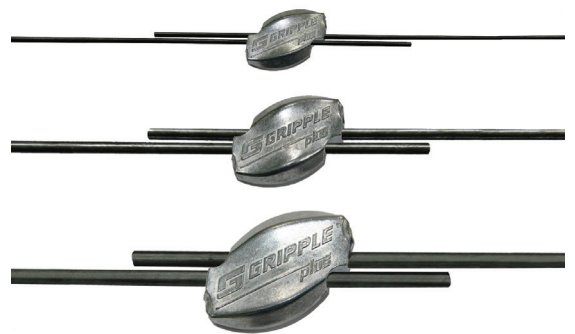




Specification

Product	Wire Type	Wire Range	Standard Wire Gauge	Maximum Working Load
Gripple Plus Small	Plain, Field, Electric	1.40mm - 2.20mm	17 SWG - 14 SWG	300 kg
Gripple Plus Medium	Plain, Field, Electric	2.00mm - 3.25mm	14 SWG - 10 SWG	400kg
Gripple Plus Large	Plain, Field, Electric	3.20mm - 4.20mm	10 SWG - 7½ SWG	600kg
Gripple Plus Jumbo	Plain, Field, Electric	2.15mm - 3.15mm	12½ SWG - 10 SWG	600kg

Installation



Stock Fence



Tips

- Reposition before applying tension using a Setting Key
- Remove sufficient verticals prior to installation
- Apply and re-apply tension with a tensioning tool
- Trim excess wire with Wire Cutters, leave at least 75 mm tail wire to enable re-tensioning