McVeigh Parker

CLIPEX STANDARD & BEEFY POST
SPECIFICATION SHEET

Standard
CL2715

Beefy
CL2720

42.8mm [1.69in]
150mm [5.91in]
75mm [2.95in]
152.4mm [6.00in]
127mm [5.00in]
127mm [5.00in]
127mm [5.00in]
127mm [5.00in]
76.2mm [3.00in]
76.2mm [3.00in]
50mm [1.97in]
50mm [1.97in]

Standard & Beefy same clip spacing

1800mm [70.87in]
2000mm [78.74in]

Strengthening plate

853.5mm [33.60in]
1045mm [41.14in]

Anti-lift plate
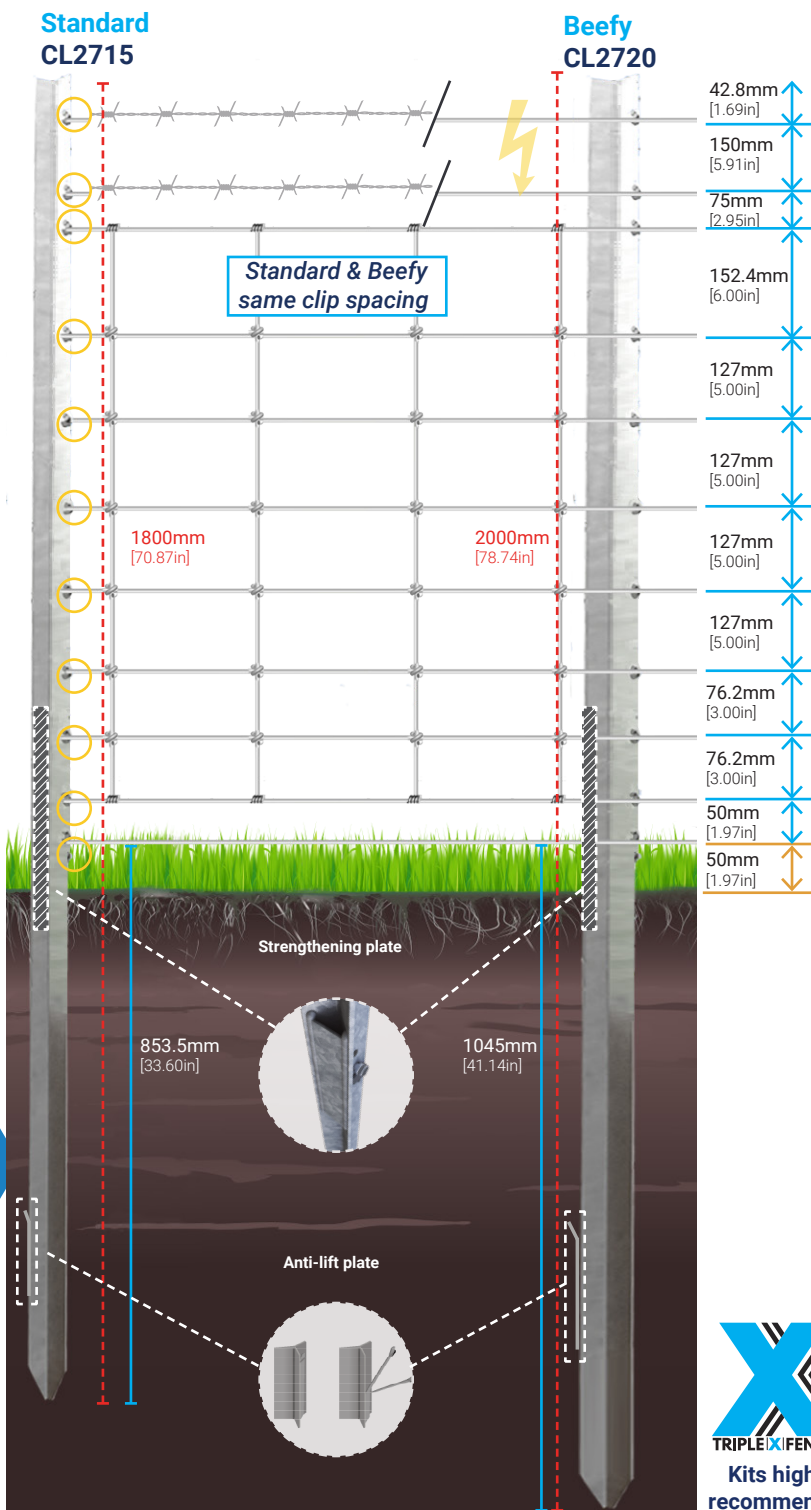
All eight lines of the wire pattern will be clipped, with two rows of barbed, electric or plain above, plus one row of plain or barbed wire as a base line. It can also be used for permanent electric fencing, line wire, barbed wire or rabbit fencing. We recommend using Beefys at slight changes of direction or where there are pressure points on undulating ground. We also recommend using Beefys to strengthen adjoining paddock fences.

Standard - 11 Clips
- **Length:** 1.8m
- **Weight:** 3.24kg
- **In ground depth:** 650mm (fence height - 1.1m)
- **Profile:** 44mm x 35mm
- **Thickness:** 3.0mm

Ø 52mm
44mm
35mm

Beefy - 11 Clips
- **Length:** 2.0m
- **Weight:** 7.0kg
- **In ground depth:** 850mm (fence height - 1.1m)
- **Thickness:** 3.5mm
- **Profile:** 66mm x 59mm

Ø 79mm
66mm
59

The Beefy profile has 230% more strength than the standard post with a 60% greater surface area providing far better ground adhesion.

Clipex Insulator   **Post Cap**   **Bolt on offset**

Compatible wire
- X knot 8-80-15
- X knot 8-80-22
- X knot 8-80-30
- Line wire
- Barbed wire
- Electric rope/wire

TRIPLE X FENCING®
Kits highly recommended

CLIPEX®